

LineLIGHT Fusion 100 24V RGB Tape A



Part No.: 300.100.04



MECHANICAL DATA	
Length	145 mm
Width	33 mm
Height	23 mm
Materials	ABS Aluminium PC
Dome colour	Tranclucent
Housing colour	Black
Protection category	IP40
Connection	M12 plug 5-pole
Type of fixing	Built-in mounting
Working temperature minimum	-30°C
Working temperature maximum	+50°C
Weight with packaging	145 g
Product weight	95 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	115 mA
Protection class	Protection class 3
Pollution degree	3 In the connection area: 2
Overvoltage category	I

OPTICAL DATA	
Light source	LED
Light colour	MC 7 colours
Optical signal image	Permanent
Length illuminated area (mm)	100
Service life optical	50,000 h maximum

ACOUSTIC DATA	
Volume (max) at 1m distance	85
Acoustic signal image	Pulse tone
Number of tones	1 tone
Audio frequency	3850 Hz
Acoustic service life	5,000 h minimum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



LineLIGHT Fusion 100 24V RGB Tape A

APPROVAL DATA		
Conforms with CE	Yes	
Conforms with RoHS directive	Yes	
WEEE	Yes	
Conforms with RED directive	No	
Conforms with ATEX-directive	No	
Conforms with CCC-Ex	No	
Conforms with CCC	No	
Conforms with UL	No	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	No	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with CMIM	No	
Conforms with AS-I	No	
Conforms with DNV	No	
Conforms with RoHS CN	10 years	
Conforms with VdS	No	


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.




LineLIGHT Fusion 100 24V RGB Tape A

DRAWING

Unit:mm

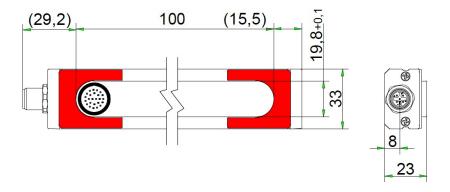

Mounting Diagram_Tape

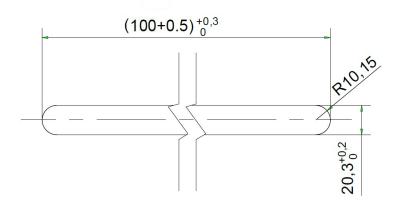

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.