



Overview

VISUAL SIGNALS - INDUSTRIAL - LED ECO BEACONS

The LED100 ECO Series is suitable for light commercial & industrial signalling applications where local indication is required. The range has been designed to offer a cost-effective solution against more traditional incandescent types of lamps, whether through new plant and machinery installations or existing facility upgrades. The design allows for termination inside the enclosure through the base.

The LED100 Beacons have two selectable stages of alarm, **Flashing** or **Continuous** (Static) mode, which are selectable via a Jumper Link located on the PCB. The design also allows for a third wire connection giving flexibility to switch from a pre-set Static Mode to Flashing.

If you require a different mounting Base option, please refer to our LEDD100 or LEDS100 Datasheets.

If you require an audible as well as a visual signal, please refer to our LEDA100 Datasheet.

Features


- Continuously rated
- Flasing or Static
- Low current consumption
- Suitable for surface, conduit box or wall mounting
- Optional wall bracket - See accessories on page 2
- 2 point fix
- 360° light output around the vertical axis
- Available in 12vAC/DC, 24vAC/DC, 48vAC/DC and 115/230vAC/DC

Material

- UV Stable Polycarbonate Lens
- UV Stable ABS Plastic Base

IP 65

 8 SMT LED

 160 FPM*

 -25 to +55°C

 50/60Hz

*Flashes Per Minute

APPROVALS & CONFORMITIES



Ordering Information


Voltage		Ordering Information			Mode & Current Consumption	
Nominal Voltage	Voltage Range	Amber	Red	Green	Flashing	Static
12vAC/DC	10-17vAC/DC	LED100-01-01	LED100-01-02	LED100-01-04	120mA @12vDC	206mA @12vDC
24vAC/DC	20-30vAC/DC	LED100-02-01	LED100-02-02	LED100-02-04	76mA @24vDC	120mA @24vDC
48vAC/DC	35-85vAC/DC	LED100-03-01	LED100-03-02	LED100-03-04	50mA @48vDC	78mA @48vDC
115-230vAC/DC	85-280vAC/DC	LED100-05-01	LED100-05-02	LED100-05-04	19mA @230vAC	28mA @230vAC

Effective Candela (Cd) - Formula Blondel-Rey

Amber	Red	Green
7.57	3.58	5.07

Weights & Dimensional Drawings

Kg	12v	24v	48v	230v
Net Weight	0.097	0.097	0.127	0.127
Gross Weight	0.150	0.150	0.180	0.180

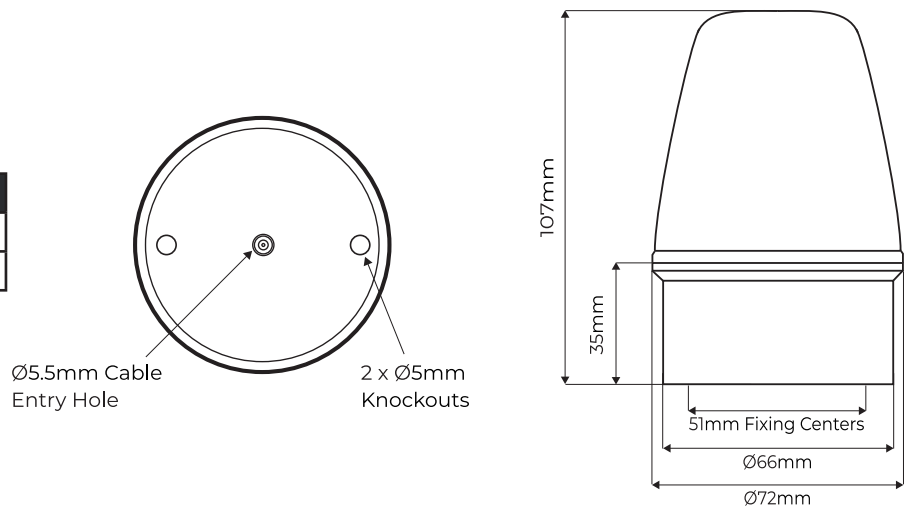

Accessories

Part Code	Description
50003	Cage Guard - Suitable for use with the 100 & 125 Series Beacon range (Cannot be fitted with Wall Bracket).
50007	Angled Wall Bracket - Suitable for use with the 100 & 125 Series Beacon range (Cannot be fitted with Cage guard).
50045-SK	Amber Lens - Suitable for use with the 100 Series Beacon range.
50046-SK	Red Lens - Suitable for use with the 100 Series Beacon range.
50048-SK	Green Lens - Suitable for use with the 100 Series Beacon range.



50003



50007



50045-SK



50046-SK



50048-SK

APPROVALS & CONFORMITIES

