

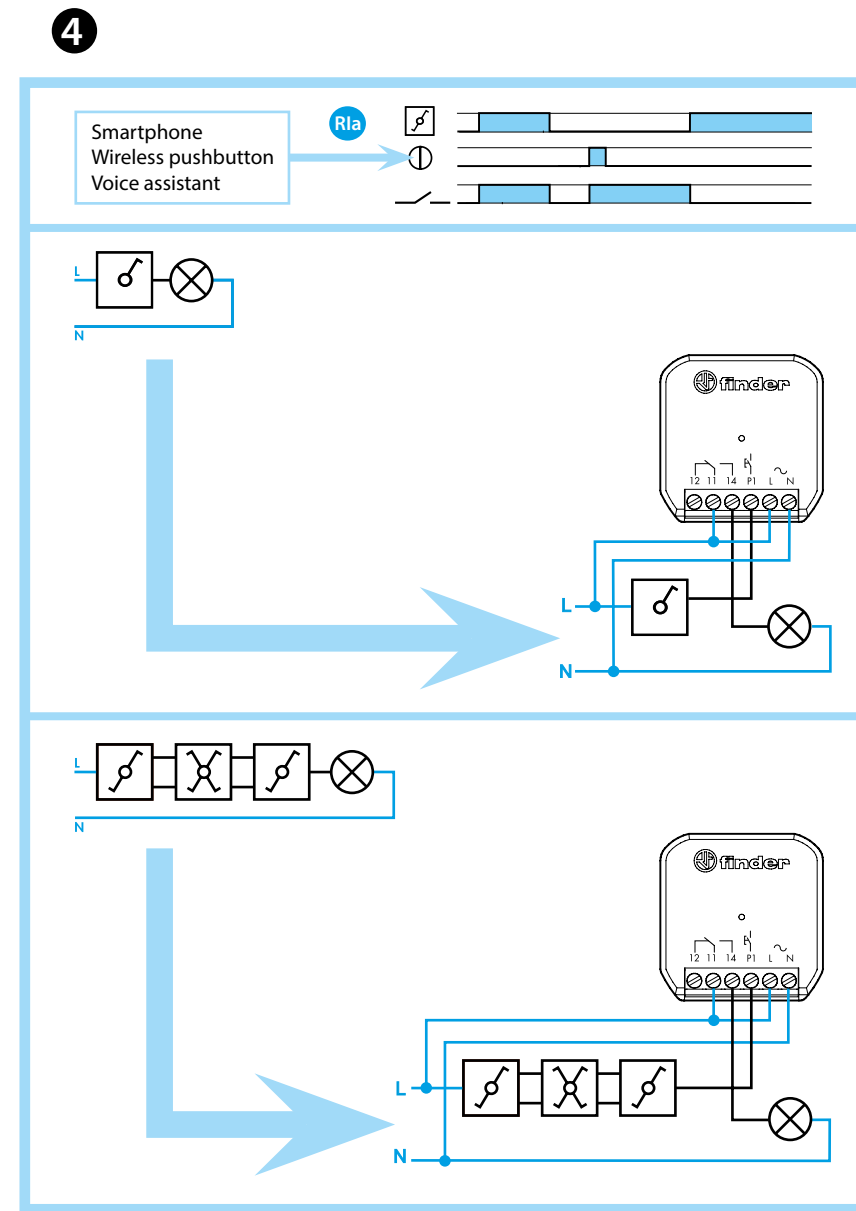
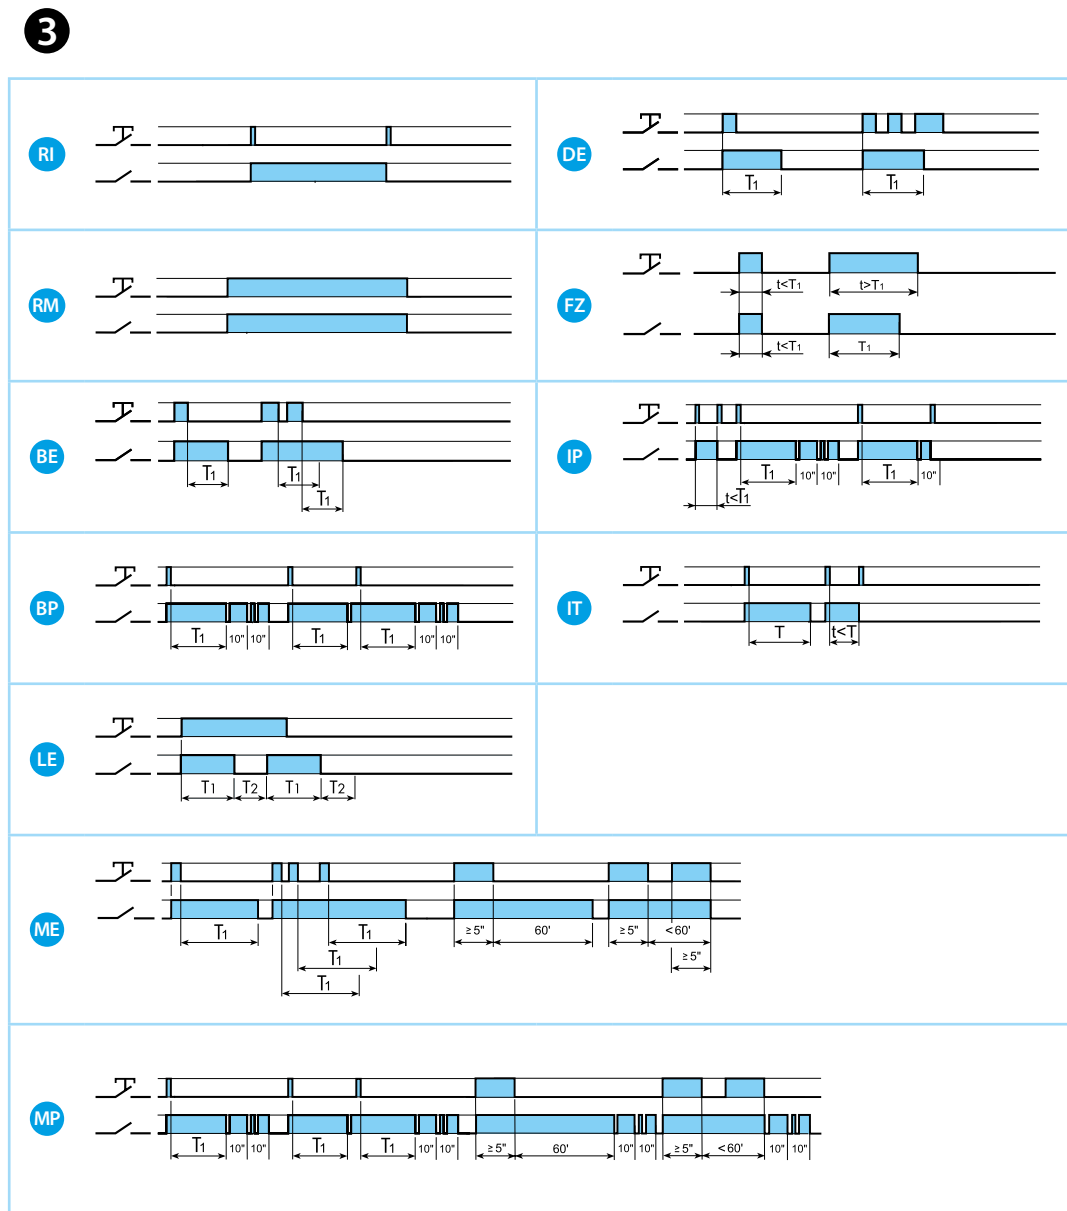


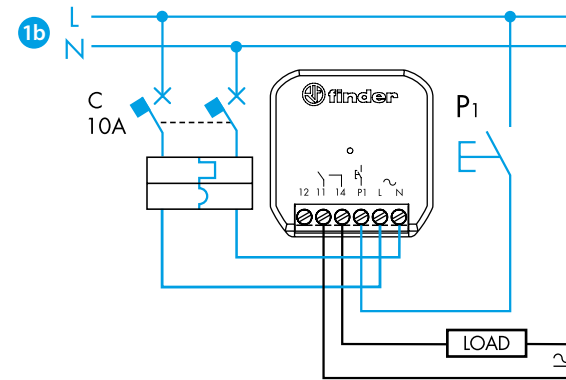

13.21 B

	13.21.8.230.B000 U_N 110...230 V AC (50/60 Hz) U_{min} 88 V AC U_{max} 253 V AC P 2.8 VA (50 Hz)/0.8 W		
	1 CO (SPDT) 16 A 250 V AC		
	AC1 AC15 (M)	110 V 1700 VA 300 VA 250 W	230 V 3600 VA 600 VA 500 W
	(-10...+50)°C		
IP20			

EN 60669-1 / EN 60669-2-1		
		1000 W
		4 A
	CFLi-LEDi General purpose	300 W 6 A

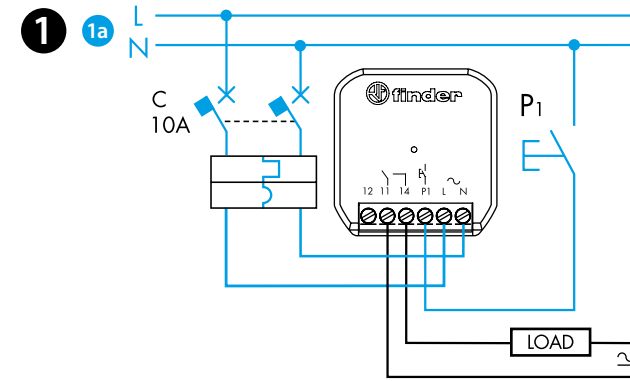

ENGLISH

13.21.8.230.B000 MULTI-FUNCTION RELAY

1 WIRING DIAGRAM

1a 3 wires (P1 button to neutral)

1b 4 wires (P1 button to phase)

NOTA

The 12 terminal refers to the NC contact of the relay

2 FINDER YOU APPLICATION

With the Finder YOU App you can:

- Set the functions, the Sequences and the timing from 1 s to 24 h
- Associate the wireless pushbutton
- Set the scenarios

NOTE

- Transmission range: approximately 10 m in free space and without obstacles
- The transmission range may vary depending on the building structure
- Example:
 - Reinforced concrete walls and/or metal walls
 - Partition walls filled with insulating wool on a metallic backing
 - Ceilings with metal or carbon fiber panels
 - Lead glass or glass with metal cladding, steel furniture

3 FUNCTIONS

R1: factory pre-set function

NOTA

- DE function ($T \geq 2''$) for electric locks

4 FUNCTION R1a

R1a: Step relay (switch control)

A traditional lighting system with switch, diverter and inverter, can be remotely controlled with the Finder YESLY App, using wireless pushbuttons, or via a voice assistant.

NOTA

Electronic switches must be protected upstream by a circuit breaker with a maximum rated current of 10 A. Other types of protection can be used. These must have equivalent characteristics and comply with national regulations.