

1415149

https://www.phoenixcontact.com/in/products/1415149

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: Brass, nickel-plated, application: Ex, external cable diameter 5 mm ... 10 mm, shielding: yes, connecting thread: M16 x 1.5, color: silver, with O-ring

### Your advantages

- Dust protection during storage and transport provided by a dust cap.
- · Weatherproof sealing material
- · Halogen-free

### Commercial data

Item number	1415149
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BF7
Product key	AF7DDX
Catalog page	Page 651 (C-3-2019)
GTIN	4055626037936
Weight per piece (including packing)	42.94 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	74198090
Country of origin	DE



1415149

https://www.phoenixcontact.com/in/products/1415149

### Technical data

### Mounting

Assembly note	Mounting the screw connection:  - Mount cable gland support  - Strip outer cable sheath. Expose around 7 mm of the cable shield.  - Push the outer cone over the braided shield  - Push the inner cone under the shield  - Insert both, together with the cable, in the mounted screw connection support
	connection support  - Tighten union nut with the required torque


### Product properties

Product type	Cable screw gland
Application	Ex
No. of conductors	1
Manufacturer	WISKA
Manufacturer Designation	EMSKE-L 16 EMV-Z
Shielded	yes

### Ex data

Cable types that can be used	for unarmored cables
Suited for EX-applications	yes

### Dimensions

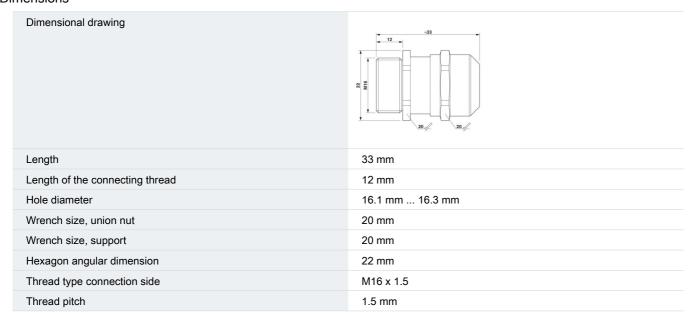

#### Connection data

Tightening torque	4 Nm (Support sleeve)
-------------------	-----------------------

### Material specifications



1415149

**IECEx** 

https://www.phoenixcontact.com/in/products/1415149

Color	Brass color
Material Compression ring	PA
Seal material Cable seal	EPDM
Material for screw connection	Brass, nickel-plated
Cable/line	
External cable diameter	5 mm 10 mm
Environmental and real-life conditions  Ambient conditions	
	IP66
Ambient conditions	IP66 IP68 (5 bar / 0.5 h)
Ambient conditions	
Ambient conditions  Degree of protection	IP68 (5 bar / 0.5 h)


Ex e IIC Gb, Ex tb IIIC Db



1415149

https://www.phoenixcontact.com/in/products/1415149

### Drawings

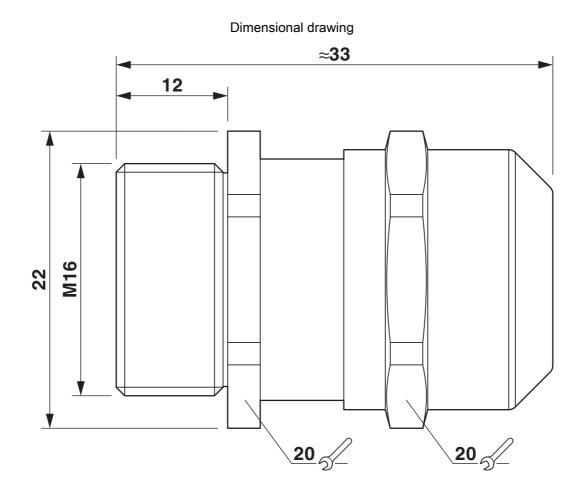



1415149

https://www.phoenixcontact.com/in/products/1415149

### **Approvals**

🎨 To download certificates, visit the product detail page: https://www.phoenixcontact.com/in/products/1415149



**cUL Recognized**Approval ID: E179850



**UL Recognized**Approval ID: E179850



**EAC Ex** 

Approval ID: RU C-DE.HA67.B.00120



GL

Approval ID: 20259-04 HH



**ECE**x

Approval ID: IECEx PTB 13.0027X



ATEX

Approval ID: PTB 04 ATEX 1112 X

cULus Recognized



1415149

https://www.phoenixcontact.com/in/products/1415149

### Classifications

UNSPSC 21.0

### **ECLASS**

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140802
ETIM	
ETIM 9.0	EC000441
UNSPSC	

39121300



1415149

https://www.phoenixcontact.com/in/products/1415149

### Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	1b7d68ef-caec-419e-a8e2-b037e964239f



1415149

https://www.phoenixcontact.com/in/products/1415149

### Accessories

A-INLE-M16-N-S - EMC nut

1411268

https://www.phoenixcontact.com/in/products/1411268

EMC nut, for threads M16 x 1.5, color: silver



Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd. A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420 info@phoenixcontact.co.in