

NCU18WB473F6SRB














Appearance & Shape










- 1. Excellent solderability and high stability in environment
- 2. Excellent long time aging stability
- 3. High accuracy in resistance and B-constant
- 4. Flow / Reflow soldering possible



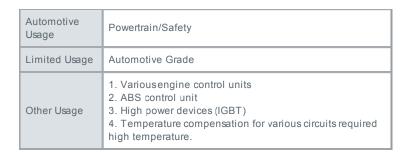



Packaging	Specifications	Minimum Order Quantity
RB	180mm Paper Tape	4000

1 of 3

Attention



URL: http://www.murata.com/

Last updated : 2016/07/27



NCU18WB473F6SRB



Resistance (25°C)	47kΩ
Resistance Value Tolerance (at 25°C)	±1%
B-Constant (25/50°C)	4050K
B-Constant (25/50°C) Tolerance	±1%
B-Constant(25/80°C)(Reference Value)	4101K
B-Constant(25/85°C)(Reference Value)	4108K
B-Constant(25/100°C)(Reference Value)	4131K
Permissive Operating Current (25°C)	0.14mA
Rated Electric Power (25°C)	100.0mW
Typical Dissipation Constant (25°C)	1mW/°C
Operating Temperature Range	-40°C to 150°C
Size Code (in mm)	1.6x0.8mm
Size Code (in inch)	0.6x0.3inch
Shape	SMD
Mass	0.0047g

2 of 3




URL: http://www.murata.com/



NCU18WB473F6SRB





Resistance-Temperature Characteristics

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

