


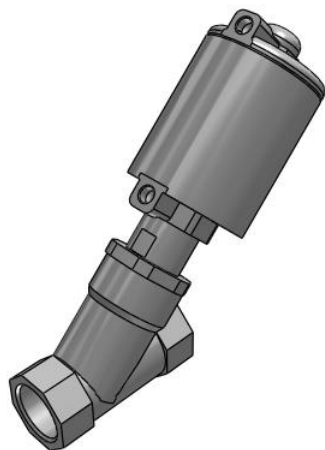


Angle Seat Valve, Air Operated Type – JSB JSB41-ST25AF-4S

Datasheet

General series information

- Applicable fluid: air, water, steam
- Flow rate up to 87.5 (Cv factor)
- Port size: 3/8" to 2"
- Body material: stainless steel 316L
- Actuator material: stainless steel 304
- Long service, up to 10 million cycles (water and air).



Directional control valve 2/2-way valve, closed normal position pneumatically controlled return with mechanical control spring

Standard specifications


Valve Size	4 (Series: 40)
Valve Type	1 (N.C.)
Body Material	S (Stainless Steel)
Seal Material	T (Fluororesin)
Port Size	25A (1)
Thread Type	F (G)
Head Size	4 (ø63)
Head Material	S (Stainless Steel)
Maximum temperature of pressure medium	183 °C
Minimum temperature of pressure medium	0 °C
Maximum operating pressure	1 MPa
Maximum pilot pressure	1.0 MPa
Minimum pilot pressure	0.5 MPa
Proof pressure	2.4 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	0 °C
Conform to the European RoHS Directive	Conform

Pneumatic input connection	G 1/8
Valve Leakage	Steam, Air: 10 cm³/min ; Water: 1 cm³/min
Weight	2.100 Kg


Technical information graphs

Flow Rate Characteristics


For Air

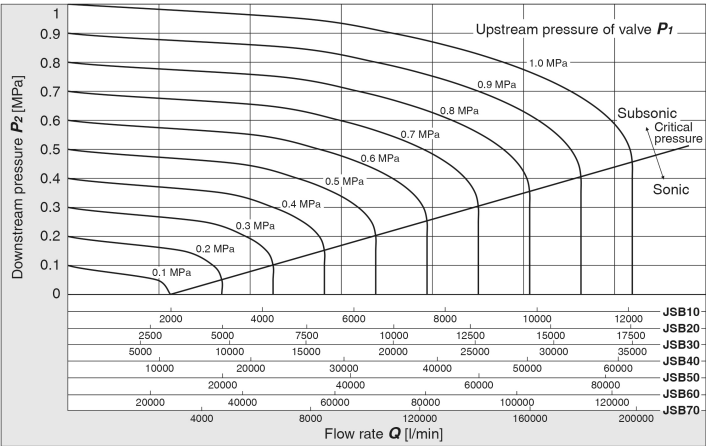


For Water

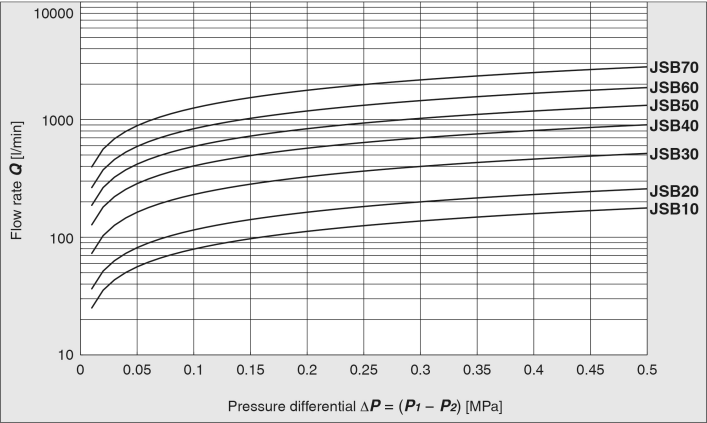

For Saturated Steam

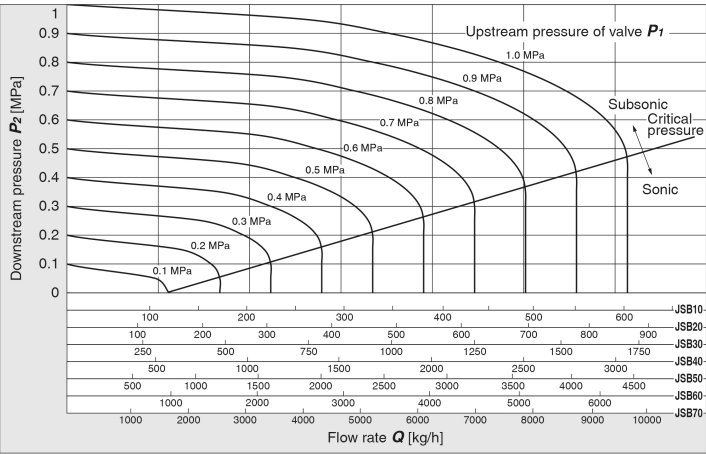

Dimensions

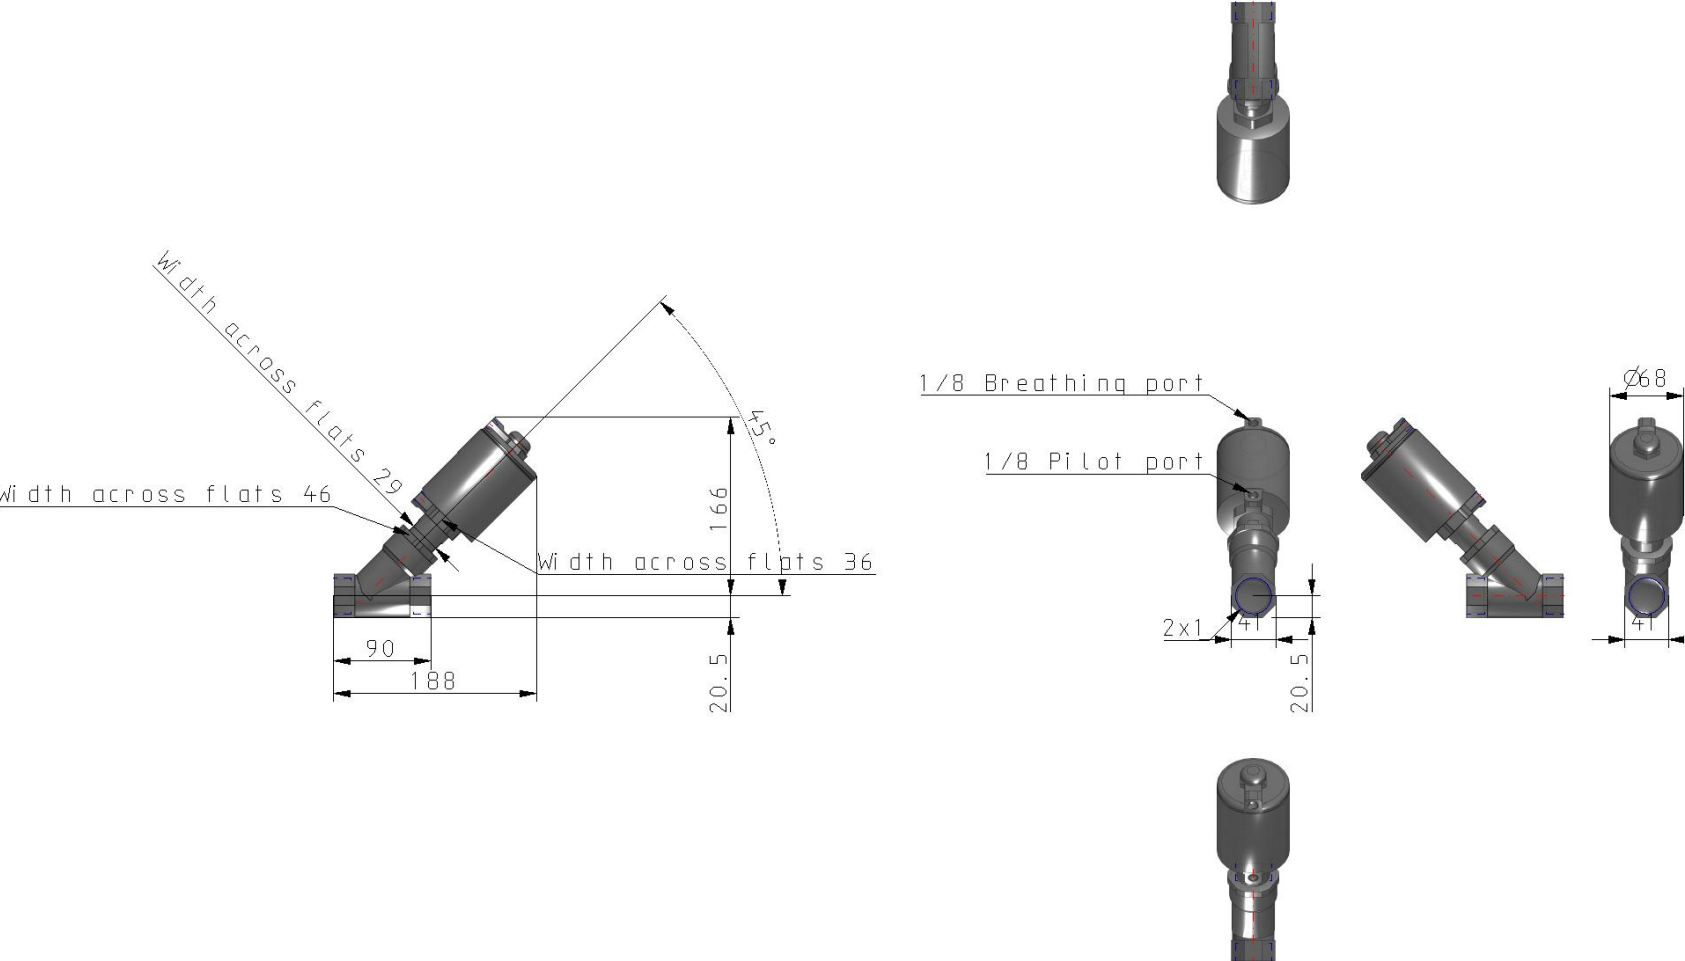


Constructions

Component Parts

No.	Description	Material
1	Pilot head assembly	Stainless steel 304 equivalent, Iron, Resin, FKM
2	Shaft seal holder assembly	Stainless steel 316L, Fluororesin, PEEK, FKM, Resin
3	Body nut	Stainless steel 304 equivalent
4	Rod	Stainless steel 316L
5	Valve element assembly	Stainless steel 316L, Fluororesin
6	Body	Stainless steel 316L equivalent

* Materials of parts in contact with fluid: Stainless steel 316L equivalent, Fluororesin, PEEK, FKM

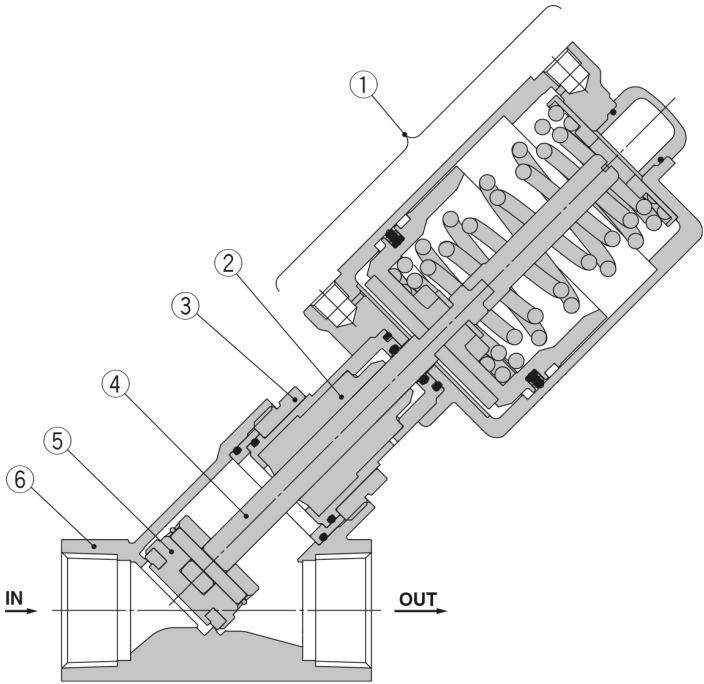

Additional information

Catalogue

[JSB-A_EU.pdf](#)