3/8" universal joint

J.240A

▷ Performance : to ISO 3316, DIN 3123, NF ISO 3316.
• Spring-stiffened joints.
⚖ : 60 g.



3/8" to 1/4" coupler

J.230

▷ Performance : to ISO 3316, DIN 3123, NF ISO 3316.
• For adapting 1/4" drive sockets.
• Max. torque 62 N.m.
⚖ : 25 g.



3/8" to 1/2" coupler

J.232

▷ Performance : to ISO 3316, DIN 3123, NF ISO 3316.
• For adapting 1/2" drive sockets.
⚖ : 45 g.

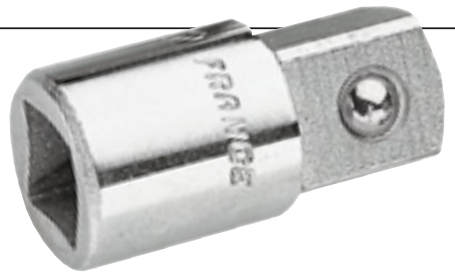



Set of 3 couplers

D.169

• Allows use of square drives smaller than socket drive sizes :
- 1/4" square drive + D.169RJ ▷ 3/8" socket.
- 3/8" square drive + D.169JS ▷ 1/2" socket.
- 1/2" square drive + D.169SK ▷ 3/4" socket.
• Compactness means that fewer tools are needed for in situ maintenance operations.
• Magnetic retainer and locking system (JS and SK).
• Knurl allows hand tightening where access is difficult.
⚖ : 96 g.

3/8" drive spring-clip bit holders

• Spring clip bit holding system.
• For frequent bit changes.

	∅ "	◪	d1 mm	d2 mm	L mm	⚖ g
J.235	1/4	3/8	11,3	18,0	30	26
J.236	5/16	3/8	14	18,0	30	30



3/8" drive lock-ring bit holder

EF.J

	∅ "	◪	Length mm	⚖ g
EF.J	1/4	3/8	43	48