



Data Sheet | Item Number: 721-435/001-040

THT male header; 1.0 x 1.0 mm solder pin; angled; 100% protected against mismatching; Preceding ground contact; Pin spacing 5 mm; 5-pole; light gray


<https://www.wago.com/721-435/001-040>

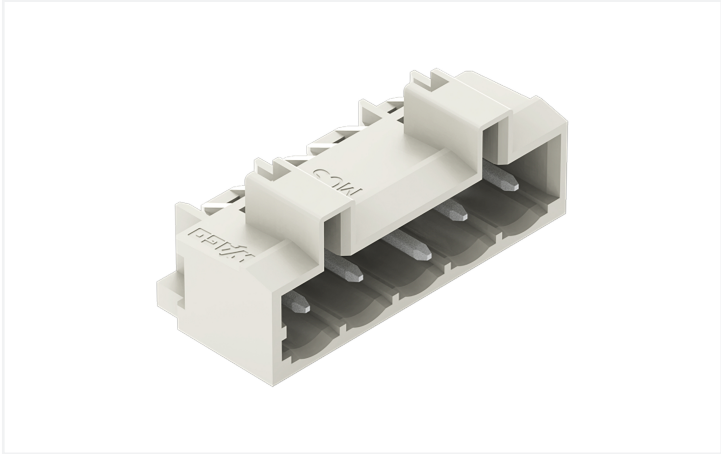

Color: ■ light gray

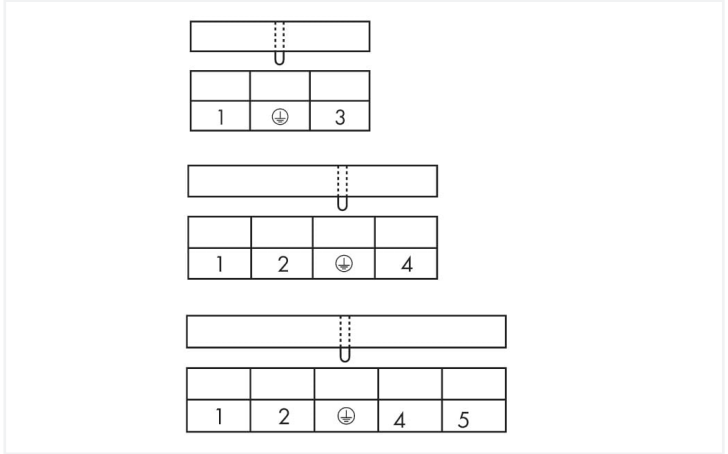

Preceding PE contact position

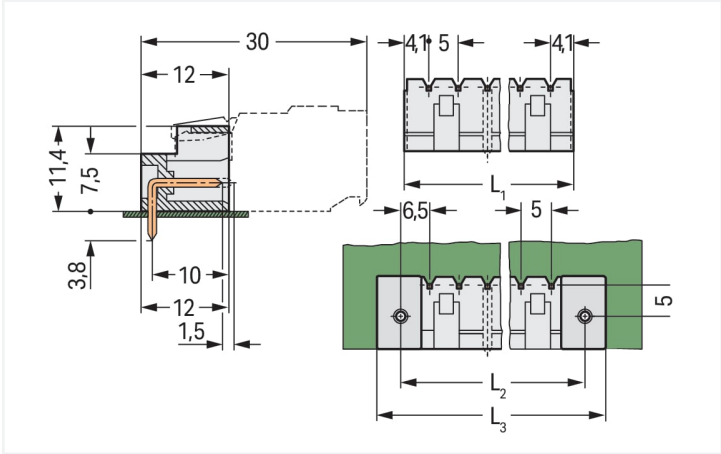

Dimensions in mm
L1 = (pole no. – 1) x pin spacing + 8.2 mm
L2 = L1 + 5 mm
L3 = L2 + 7.4 mm

- Horizontal or vertical PCB mounting via straight or angled solder pins
- Pin cross-section: 1 x 1 mm
- 100 % protected against mismatching
- With coding fingers


Notes

Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants:

Other pole numbers
3.8 mm pin projection for male headers with straight solder pins
Gold-plated or partially gold-plated contact surfaces
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

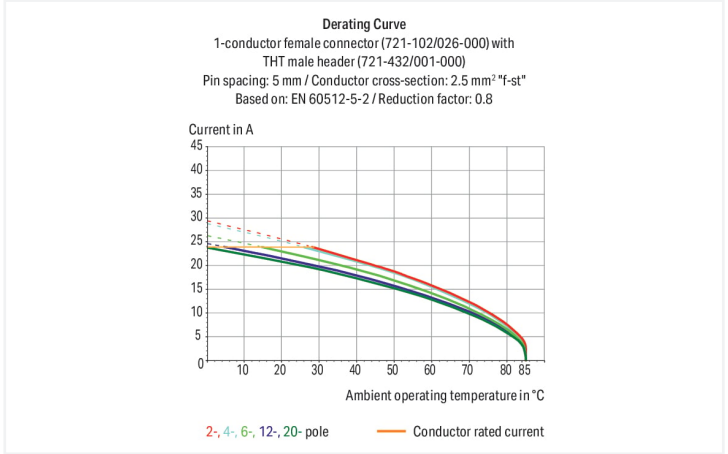



Electrical data

Ratings per IEC/EN 60664-1				Approvals per UL 1059			
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	300 V	-	300 V
Nominal voltage	320 V	320 V	630 V	Rated current	10 A	-	10 A
Rated surge voltage	4 kV	4 kV	4 kV				
Rated current	12 A	12 A	12 A				

Approvals per UL 1977		Approvals per CSA			
Rated voltage	600 V	Use group	B	C	D
Rated current	10 A	Rated voltage	300 V	-	300 V
		Rated current	10 A	-	10 A

Connection data

Total number of potentials	5	Connection 1	
Number of connection types	1	Pole number	5
Number of levels	1		
PE function	Preceding PE contact		

Physical data

Pin spacing	5 mm / 0.197 inches
Width	28.2 mm / 1.11 inches
Height	15.2 mm / 0.598 inches
Height from the surface	11.4 mm / 0.449 inches
Depth	12 mm / 0.472 inches
Solder pin length	3.8 mm
Solder pin dimensions	1 x 1 mm
Drilled hole diameter with tolerance	1.4 ^(+0.1) mm

Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	0 °

PCB contact

PCB contact	THT
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1



Material data		
Note (material data)		Information on material specifications can be found here
Color	light gray	
Material group	I	
Insulation material (main housing)	Polyamide (PA66)	
Flammability class per UL94	V0	
Contact material	Electrolytic copper (E _{CU})	
Contact Plating	Tin	
Fire load	0.034 MJ	
Weight	1.8 g	

Environmental requirements																																								
Limit temperature range	-60 ... +100 °C	<table><tr><th colspan="2">Environmental Testing (Environmental Conditions)</th></tr><tr><td>Test specification Railway applications – Rolling stock – Electronic equipment</td><td>DIN EN 50155 (VDE 0115-200):2022-06</td></tr><tr><td>Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests</td><td>DIN EN 61373 (VDE 0115-0106):2011-04</td></tr><tr><td>Spectrum/Installation location</td><td>Service life test, Category 1, Class A/B</td></tr><tr><td>Function test with noise-like vibration</td><td>Test passed according to Section 8 of the standard</td></tr><tr><td>Frequency</td><td>f₁ = 5 Hz to f₂ = 150 Hz f₁ = 5 Hz to f₂ = 150 Hz</td></tr><tr><td>Acceleration</td><td>0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)</td></tr><tr><td>Test duration per axis</td><td>10 min. 5 h</td></tr><tr><td>Test directions</td><td>X, Y and Z axes X, Y and Z axes X, Y and Z axes</td></tr><tr><td>Monitoring for contact faults/interruptions</td><td>Passed</td></tr><tr><td>Voltage drop measurement before and after each axis</td><td>Passed</td></tr><tr><td>Simulated service life test through increased levels of noise-like vibration</td><td>Test passed according to Section 9 of the standard</td></tr><tr><td>Extended test scope: Monitoring for contact faults/interruptions</td><td>Passed Passed</td></tr><tr><td>Extended test scope: Voltage drop measurement before and after each axis</td><td>Passed Passed</td></tr><tr><td>Shock test</td><td>Test passed according to Section 10 of the standard</td></tr><tr><td>Shock form</td><td>Half sine</td></tr><tr><td>Shock duration</td><td>30 ms</td></tr><tr><td>Number of shocks per axis</td><td>3 pos. und 3 neg.</td></tr><tr><td>Vibration and shock stress for rolling stock equipment</td><td>Passed</td></tr></table>	Environmental Testing (Environmental Conditions)		Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-04	Spectrum/Installation location	Service life test, Category 1, Class A/B	Function test with noise-like vibration	Test passed according to Section 8 of the standard	Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz f ₁ = 5 Hz to f ₂ = 150 Hz	Acceleration	0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)	Test duration per axis	10 min. 5 h	Test directions	X, Y and Z axes X, Y and Z axes X, Y and Z axes	Monitoring for contact faults/interruptions	Passed	Voltage drop measurement before and after each axis	Passed	Simulated service life test through increased levels of noise-like vibration	Test passed according to Section 9 of the standard	Extended test scope: Monitoring for contact faults/interruptions	Passed Passed	Extended test scope: Voltage drop measurement before and after each axis	Passed Passed	Shock test	Test passed according to Section 10 of the standard	Shock form	Half sine	Shock duration	30 ms	Number of shocks per axis	3 pos. und 3 neg.	Vibration and shock stress for rolling stock equipment	Passed
Environmental Testing (Environmental Conditions)																																								
Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06																																							
Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-04																																							
Spectrum/Installation location	Service life test, Category 1, Class A/B																																							
Function test with noise-like vibration	Test passed according to Section 8 of the standard																																							
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz f ₁ = 5 Hz to f ₂ = 150 Hz																																							
Acceleration	0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)																																							
Test duration per axis	10 min. 5 h																																							
Test directions	X, Y and Z axes X, Y and Z axes X, Y and Z axes																																							
Monitoring for contact faults/interruptions	Passed																																							
Voltage drop measurement before and after each axis	Passed																																							
Simulated service life test through increased levels of noise-like vibration	Test passed according to Section 9 of the standard																																							
Extended test scope: Monitoring for contact faults/interruptions	Passed Passed																																							
Extended test scope: Voltage drop measurement before and after each axis	Passed Passed																																							
Shock test	Test passed according to Section 10 of the standard																																							
Shock form	Half sine																																							
Shock duration	30 ms																																							
Number of shocks per axis	3 pos. und 3 neg.																																							
Vibration and shock stress for rolling stock equipment	Passed																																							
Processing temperature	-35 ... +60 °C																																							



Commercial data		
Product Group	3 (Multi Conn. System)	
eCl@ss 10.0	27-44-04-02	
eCl@ss 9.0	27-44-04-02	
ETIM 9.0	EC002637	
ETIM 8.0	EC002637	
PU (SPU)	200 pcs	
Packaging type	Box	
Country of origin	PL	
GTIN	4044918869614	
Customs tariff number	85366930000	

Environmental Product Compliance		
RoHS Compliance Status	Compliant, No Exemption	

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
   					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-39756/A1	Railway WAGO GmbH & Co. KG	-	Railway Ready
CSA DEKRA Certification B.V.	C22.2	1466354			
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-121453			
UL Underwriters Laboratories Inc.	UL 1059	E45172			
UR Underwriters Laboratories Inc.	UL 1977	E45171			

Approvals for marine applications

 		
Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	19-HG1869876-PDA
DNV DNV GL SE	-	TAE000016Z

Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance	721-435/001-040		

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models	721-435/001-040	EPLAN Data Portal	721-435/001-040
			
		ZUKEN Portal	721-435/001-040
			

PCB Design	
Symbol and Footprint via SamacSys	721-435/001-040
	
Symbol and Footprint via Ultra Librarian	721-435/001-040
	

1 Compatible Products
1.1 System counterpart
1.1.1 Female connector/socket



Item No.: 721-105/026-000
1-conductor female connector; CAGE CLAMP®; 2.5 mm²; Pin spacing 5 mm; 5-pole; 100% protected against mismatching; 2,50 mm²; light gray

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding



Item No.: 231-129
Coding key; snap-on type; light gray

1.2.2 Marking

1.2.2.1 Marking strip




Item No.: 210-833
Marking strips; 25 m on roll; 6 mm wide; plain; Self-adhesive; white



Item No.: 210-834
Marking strips; on reel; 5 mm wide; plain; Self-adhesive; white

Installation Notes

Coding



Coding a male header – fitting coding key(s).