

applied energy ^{///GDA}




Service Information

GDA Applied Energy
Morley Way
Woodston
Peterborough PE2 9JJ
United Kingdom

Telephone: +44 (0) 1733 456789
Fax: +44 (0) 1733 310606

Registered Office: Peterborough PE2 9JJ
Registered in England No. 306008

Circulation:	Issue Date: 14/03/01	Issue No: 3	Compiled By: Paul Cox
Product:	Xpelair Xodus XX100 Range of Extractor Fans		
Models:	XX100 - Standard XX100PC - Pull Cord XX100T - Timer		

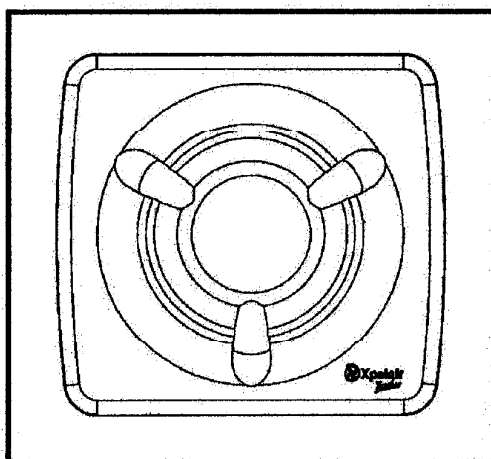

Applications

The XX100 range of extractor fans are suitable for domestic toilets, bathroom and shower rooms. Commercial applications include hotel rooms, office toilets and other small rooms.

Common Features

- Single speed extract.
- Finger guarding for additional protection.
- Lubricated for life motors fitted with a thermal cut out.
- 2 year UK guarantee.
- Comprehensive range of ancillaries to suit a wide range of installations (sold separately).

Fan Dimensions

Height - 155mm
Width - 165mm
Depth - 43mm

Operation

- XX100 - The fan is operated using a remote on/off switch (not supplied).
- XX100PC - The fan is operated by an integral pull cord switch.
- XX100T - The fan is operated using a remote on/off switch (not supplied). When the switch is turned off, the fan will continue to operate for the set time delay of 20 minutes.

Ancillaries Available

The XX100 fans can be installed in various applications with the ancillaries being sold separately:

- XXGK4 - Window kit
- XCMK - Ceiling adaptor kit
- XXCT100 - Condensation trap
- XXWK4 - Wall kit
- XXWG4 - Wall grille

Specification

- Mains supply - 220-240V, 50Hz, 1 Phase AC
- Insulation class - II (double insulated)
- Motor rating - 11W
- Air performance - 79m³/h (22l/s) FID
- Noise - 32.5dbA @ 3m

Maintenance

**BEFORE CLEANING, ISOLATE THE FAN COMPLETELY FROM THE MAINS.
THERE IS NO ISOLATION WHEN REMOVING THE FRONT COVER.**

Remove the front cover by pressing the release catches located on the sides of the unit with a 3mm screwdriver, whilst pulling the front cover forward.

Refit the front cover by aligning it square to the duct and pushing it onto the duct until the release catches snap into the slots on the front cover. Ensure the overlapping features around the centre hubs of the duct and front cover are on the correct sides.

User instruction part no. 567202601

Spares

The following items will be available as spares for the DX100 range:

- Printed front cover for XX100 & XX100T
- Printed front cover for XX100P
- Pull cord switch/cord
- XX100T pcb assembly