



70MM STEADY/MULTI-EFFECT LIGHT TOWER 3 COLOUR



P.N. 190-2862, 190-2863, 190-2864, 190-2868, 190-2869, 190-2870

Torretta di segnalazione luminosa
Luminous warning STACK LIGHT.
Colonne de signalisation lumineuse.
Signalsäule
Columna luminosa.

CORPO BODY CORPS GEHAUSE CUERPO DEL PRODUCTO	PC										
GHIERA RING BAGUE	PC										
GRUPPO OTTICO LUMINOUS SOURCE SOURCE LUMINEUSE LICHTQUELLE FUENTE DE LUZ	N°12 LED										
COLORI DISPONIBILI AVAILABLE COLOURS COULEURS DISPONIBLES VERFÜGBARE FARBEN COLORES DISPONIBLE											
TENSIONE DI ALIMENTAZIONE VOLTAGE TENSION SPANNUNG TENSIÓN	24 Vdc/Vac – 110 Vac – 240 Vac										
SERVIZIO OPERATION FONCTIONNEMENT BETRIEBSART FUNCIONAMIENTO	∞										
CORRENTE NOMINALE CURRENT CONSUMPTION CONSUMMATION DE COURANT STROMAUFNAHME CONSUMO DE CORRIENTE	<table border="1"> <thead> <tr> <th></th> <th>24Vdc</th> <th>24Vac</th> <th>110Vac</th> <th>240Vac</th> </tr> </thead> <tbody> <tr> <td>mA (max)</td> <td>195</td> <td>255</td> <td>105</td> <td>105</td> </tr> </tbody> </table>		24Vdc	24Vac	110Vac	240Vac	mA (max)	195	255	105	105
	24Vdc	24Vac	110Vac	240Vac							
mA (max)	195	255	105	105							
RESA LUMINOSA LIGHT OUTPUT RENDEMENT LUMINEUX LICHT LEISTUNG SALIDA DE LUZ	<table border="1"> <thead> <tr> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>ALL COLOR Cd(p)</td> <td>7</td> <td>3</td> <td>5</td> </tr> </tbody> </table>					ALL COLOR Cd(p)	7	3	5		
ALL COLOR Cd(p)	7	3	5								
MODALITA' LUCE LIGHT EFFECT EFFET LUMINEUX LICHTEFFEKT EFECTO LUMINOSO	Fissa – 1F – 2F – 3F Steady – 1F – 2F – 3F Fixe – 1F – 2F – 3F Dauerlicht – 1F – 2F – 3F Luz fija – 1F – 2F – 3F										

Dati diffusi a solo scopo informativo. RS Components puo' modificare i dati in qualsiasi momento senza preavviso.

These data are disclosed only for information purposes. RS Components reserves the right to modify them at any time without prior notice.

Les données ne sont divulguées qu'à titre d'information. RS Components se réserve la faculté de les modifier à tout moment sans préavis

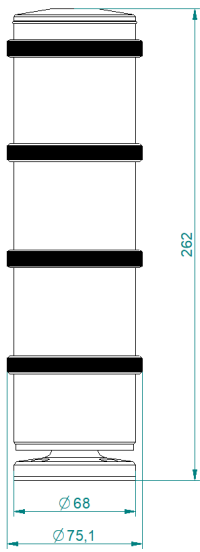
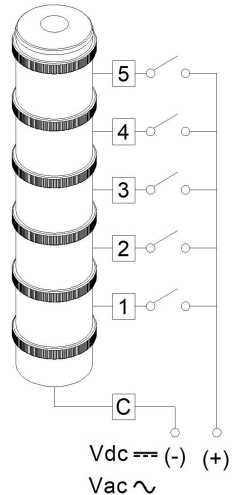
Diese Daten werden nur zu Informationszwecken weitergegeben. RS Components behält sich das Recht vor, diese jederzeit ohne vorherige Ankündigung zu ändern.

Estos datos se divulgan solo con fines informativos. RS Components Se reserva el derecho de modificarlos en cualquier momento sin previo aviso.



SCHEDA TECNICA
Technical data sheet
Fiche technique

06/09/19

GRADO IP IP RATING DEGRE IP SCHUTZART GRADO IP	IP66
TEMPERATURA DI FUNZIONAMENTO OPERATING TEMPERATURE TEMPERATURE DE SERVICE BETRIEBSTEMPERATUR TEMPERATURA DE FUNCIONAMIENTO	-30°C+50°C
VIBRAZIONI VIBRATIONS VIBRATIONS VIBRATIONEN VIBRACIONES	INDUSTRIAL CEI 60068-2-6 SINE
CERTIFICAZIONI, OMOLOGAZIONI CERTIFICATIONS, APPROVALS CERTIFICATIONS, HOMOLOGATIONS PRODUKTZERTIFIKATE, ZULASSUNGEN CERTIFICADOS, HOMOLOGACIONES	CE
FISSAGGIO MOUNTING FIXATION FIXIERUNG FIJACIÓN	Ghiera Ring Bague Ring Contera
DISEGNO TECHNICAL DRAWING DESSIN TECHNISCHE ZEICHNUNG DIBUJO TECNICO	
COLLEGAMENTO ELETTRICO ELECTRICAL WIRING RACCORDEMENT ELECTRIQUE ELEKTRISCHE VERBINDUNG CONEXIÓN ELÉCTRICA	

Dati diffusi a solo scopo informativo. RS Components puo' modificare i dati in qualsiasi momento senza preavviso.

These data are disclosed only for information purposes. RS Components reserves the right to modify them at any time without prior notice.

Les données ne sont divulguées qu'à titre d'information. RS Components se réserve la faculté de les modifier à tout moment sans préavis

Diese Daten werden nur zu Informationszwecken weitergegeben. RS Components behält sich das Recht vor, diese jederzeit ohne vorherige Ankündigung zu ändern.

Estos datos se divulgan solo con fines informativos. RS Components Se reserva el derecho de modificarlos en cualquier momento sin previo aviso.