1218441-3 ACTIVE

AMPLIMITE

TE Internal #: 1218441-3

Plug, Cable-to-Board, Board Mount, 25 Position, 3 Shell Size, Pin, Size 20 Contact Size, 2.77 mm [.109 in] Centerline, Printed Circuit

Board, Signal
View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > Panel Mount D-Sub Connectors



Connector & Housing Type: Plug

Termination Post & Tail Diameter: .76 mm [.03 in]

Connector System: Cable-to-Board

Connector Mounting Type: Board Mount

Number of Positions: 25

Features

Product Type Features

Connector & Housing Type	Plug
Connector System	Cable-to-Board
Connector Shell Size	3
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Positions	25
Power/Signal/Coax Combination	No

Body Features

Front Shell Material	Steel
D-Sub Connector Insert Arrangement	MS18275-1
Rear Shell Plating Material	Cadmium
Rear Shell Material	Steel
Front Shell Plating Material	Cadmium

Contact Features

Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Beryllium Copper, Brass



PCB Contact Termination Area Plating Material	Nickel
	10 μin[50 μin]
Contact Options	Installed
Contact Type	Pin
Contact Size	Size 20
Contact Current Rating (Max)	5 A
Termination Features	
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.96 mm[.156 in]
Termination Post & Tail Diameter	.76 mm[.03 in]
Mechanical Attachment	
Mounting Hole Diameter	3.05 mm[.12 in]
Connector Mounting Type	Board Mount
Mating Alignment	Without
Housing Features	
Centerline (Pitch)	2.77 mm[.109 in]
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	

Product Compliance

Packaging Method

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Cd (100% in 10563731072)

Package



Pb (3.7% in 74019106)

Article Safe Usage Statements:

Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Not Low Halogen - contains Br or Cl > 900
	ppm.


Solder Process Capability

Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Customers Also Bought










3152 1201 10,TNC FLANGE JACK



AMPLIMITE, ASY, RCPT, RTANG, 109, 3

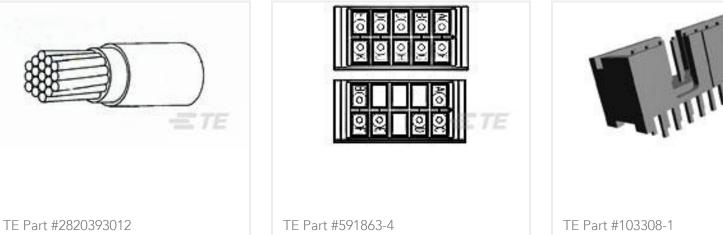

TJ F/B 20E SPEC 5 DIODES







44A0111-22-9





Documents

Product Drawings

R/A PLG ASSY 25 POS SER 109

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1218441-3_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1218441-3_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1218441-3_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use