


Standard Digital Calipers

Electr. Digital Caliper


DIN 862

- standard caliper
- with extrem large LCD display


- mechanic parts stainless steel, hardened
- large LCD display with clear reading, digit height 15 mm
- measuring jaws finely ground and lapped
- On/Off-button, with fixing screw
- mm/inch/frac in inch switchable, Zero-setting at any position
- incl. 1x 3 V battery (type CR2032, art. no.: 90112), with operation manual

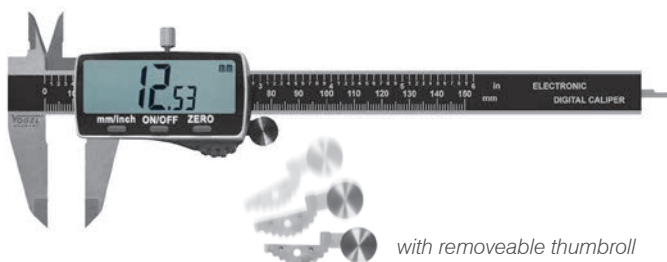

with removeable thumbroll



display with fraction number in inch




ART No	mm / inch	mm / inch	mm	mm	mm	mm	flat	CC
202011-3	150 / 6	0.01 / 0.0005	0.01	0.03	40	16.5	flat	on request
202012-3	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat	on request
202013-3	300 / 12	0.01 / 0.0005	0.01	0.04	60	20.5	flat	on request

Electr. Digital Caliper

DIN 862

- with metal housing and metal buttons

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 8 mm digit height
- jaws finely ground and lapped, with fixing screw
- On/Off button
- mm/inch switchable, zero setting at any position
- incl. 2x 1.5 V battery (type LR44, art. no.: 90213), with operation manual




ART No	mm / inch	mm / inch	mm	mm	mm	mm	flat	CC
202140	100 / 4	0.01 / 0.0005	0.01	0.02	30.5	12.5	flat	on request

Electr. Digital Caliper

DIN 862

- with metal housing and metal buttons
- standard model for larger measuring range
- with data output (mini USB)

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw and fine adjustment
- On/Off button, with ABS/INC measuring system
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art. no.: 90112), with operation manual

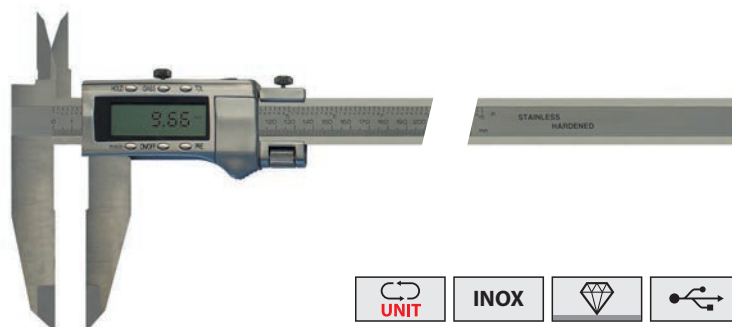

Option

- data transfer via cable, art. no. 209001, see page 272

ART No	mm / inch	mm / inch	mm	mm	mm	mm	CC
202065	400 / 16	0.01 / 0.0005	0.01	0.05	100	38	on request
202066	500 / 20	0.01 / 0.0005	0.01	0.05	100	38	on request
202067	600 / 24	0.01 / 0.0005	0.01	0.05	100	38	on request
202068	800 / 32	0.01 / 0.0005	0.01	0.06	125	51.5	on request
202069	1000 / 40	0.01 / 0.0005	0.01	0.07	125	51.5	on request