

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		A	REVISED PER EC OS14-0150-05	01SEP05	BM	JL

- 1

ZINC PER QQ-Z-363
- 2

BERYLLIUM COPPER PER ASTM-B-196
- 3



PTFE PER MIL-P-19468
- 4

GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
- 5

TIN PLATE PER ASTM-B-545,
3.04 μm [.000120] MINIMUM THICK.
- 6

SEE INSTRUCTION SHEET 408-9889.
- 7

NICKEL PLATE PER QQ-N-290
5.08 μm [.000200] MINIMUM THICK.

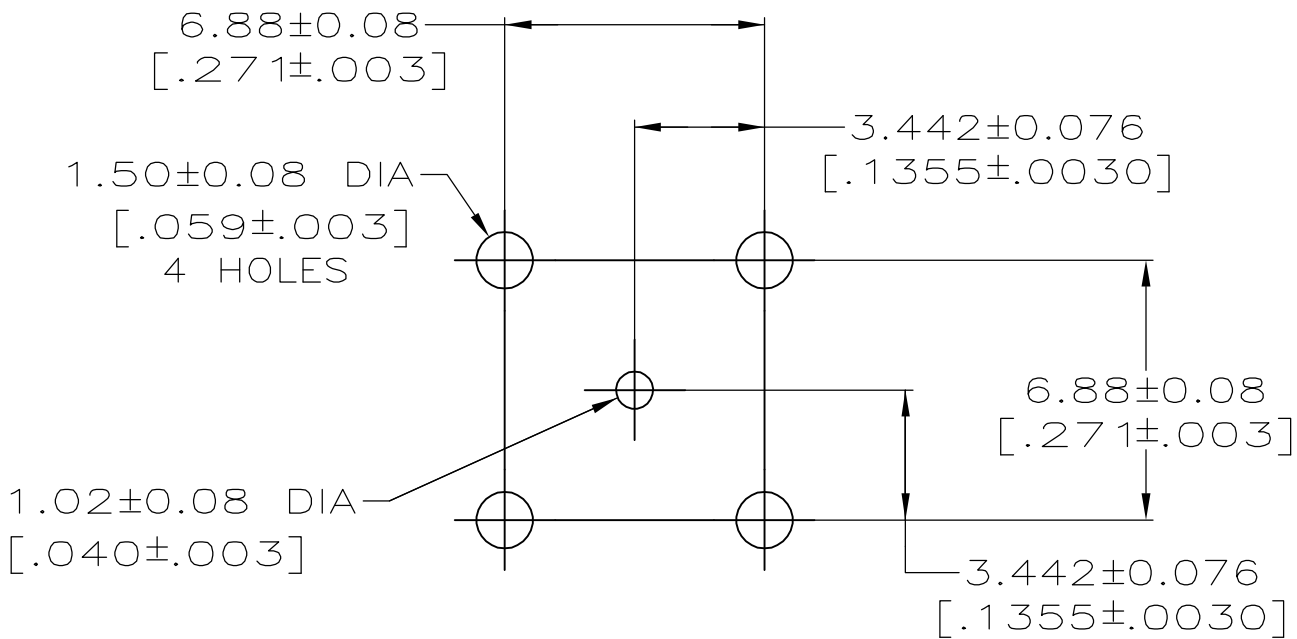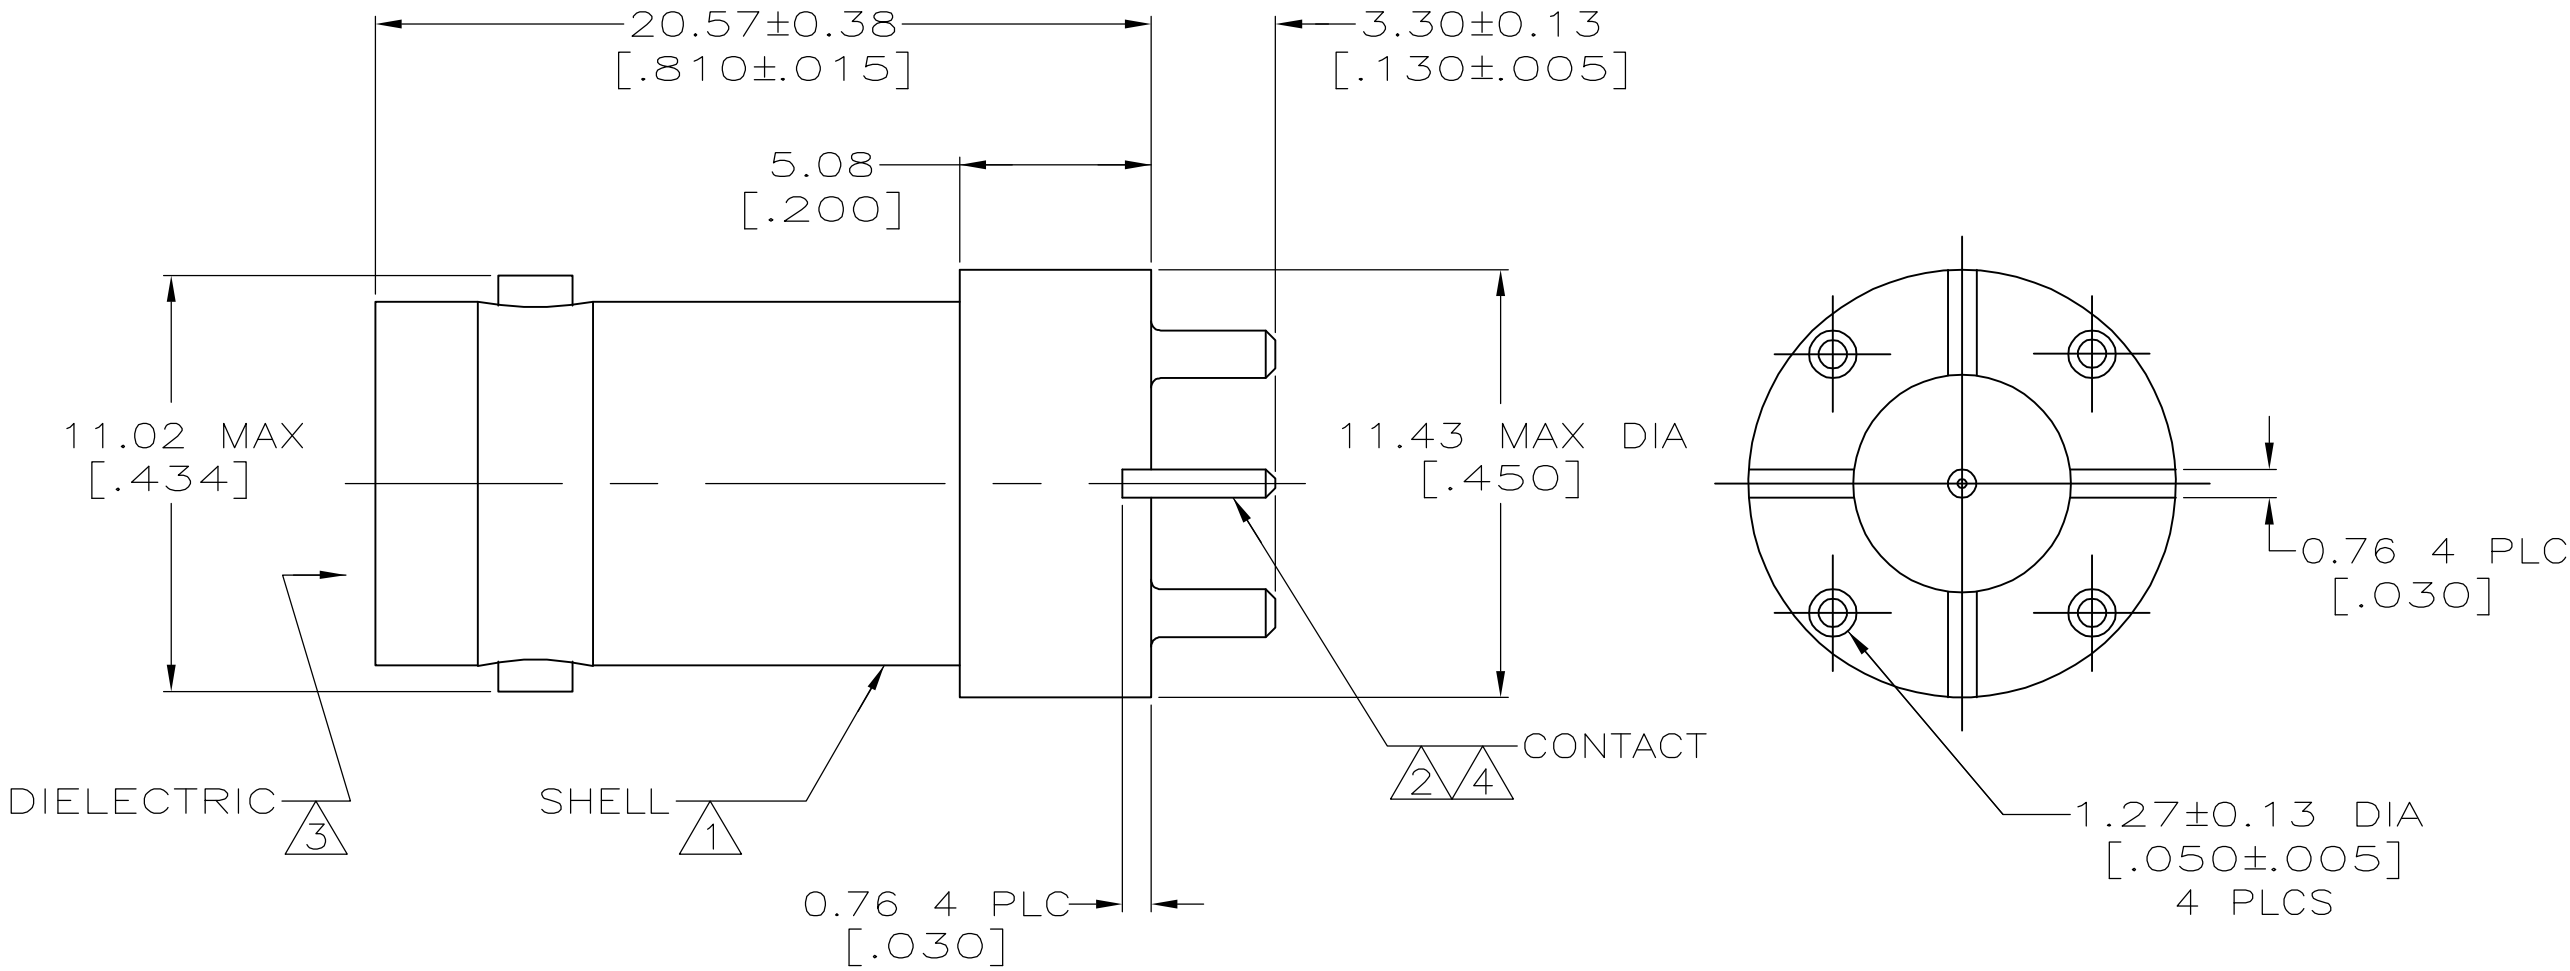

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

L. VARELA - DOCK5

02FEB2005

CHK

J. HAVENER

02FEB2005

APVD

J. LIPPERT

02FEB2005

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± 0.20 [.008]

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

MATERIAL

SEE NOTES 1 - 3

FINISH

SEE NOTES 4, 5

PRODUCT SPEC

108-12078

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

NAME

JACK, VERTICAL, PCB,
75 OHM, COMMERCIAL BNC

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=6274291

RESTRICTED TO

-

SCALE

5:1

SHEET

1

OF

1

REV

A

tyco

Electronics

Tyco Electronics Corporation

Harrisburg, Pa 17105-3608