

Article No. : 6SL4112-0CA17-0FF0

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

Figure similar



### Rated data

|                               |                          |                          |
|-------------------------------|--------------------------|--------------------------|
| Input                         |                          |                          |
| Number of phases              | 3 AC                     |                          |
| Line voltage                  | 200...240V (–20+10 %)    |                          |
| Line frequency                | 50/60 Hz (47 ... 63 Hz)  |                          |
| Voltage range (voltage class) | 200 ... 240 V (230V IEC) | 200 ... 240 V (240V NEC) |
| Rated current                 | 41.8 A                   | 39.5 A                   |

|                                     |                          |                          |
|-------------------------------------|--------------------------|--------------------------|
| Output                              |                          |                          |
| Number of phases                    | 3 AC                     |                          |
| Voltage range (voltage class)       | 200 ... 240 V (230V IEC) | 200 ... 240 V (240V NEC) |
| Rated power (LO)                    | 11.00 kW                 | 15.00 hp                 |
| Rated power (HO)                    | 7.50 kW                  | 10.00 hp                 |
| Rated current (LO)                  | 46.0 A                   | 42.0 A                   |
| Rated current (HO)                  | 40.0 A                   | 28.0 A                   |
| Rated current (IN)                  | 47.2 A                   | 43.1 A                   |
| Max. output current                 | 80.0 A                   |                          |
| Pulse frequency (factory setting)   | 4 kHz                    |                          |
| Output frequency for vector control | 0 ... 480 Hz             |                          |
| Output frequency for V/f control    | 0 ... 550 Hz             |                          |

|                                                                                                     |  |
|-----------------------------------------------------------------------------------------------------|--|
| Overload capability                                                                                 |  |
| Low Overload (LO)                                                                                   |  |
| 150% rated current (HO) for 3 s, followed by 110% rated current (HO) for 57 s in a 300 s cycle time |  |
| High Overload (HO)                                                                                  |  |
| 200% rated current (HO) for 3 s, followed by 150% rated current (HO) for 57 s in a 300 s cycle time |  |

|                         |                        |
|-------------------------|------------------------|
| Electronic power supply |                        |
| Voltage                 | 24 V (20.4 ... 28.8 V) |
| Current demand, max.    | 2.00 A                 |

|                                     |            |
|-------------------------------------|------------|
| General tech. specifications        |            |
| Power factor λ (typical)            | 0.90       |
| Displacement factor cos φ (typical) | 0.98       |
| Efficiency η                        | 0.97       |
| Sound pressure level (1m)           | 70 dB      |
| Filter class (integrated)           | Unfiltered |

|               |                                   |
|---------------|-----------------------------------|
| Communication |                                   |
| Communication | PROFINET, Modbus TCP, EtherNet/IP |

### SINAMICS SDI Standard Operator Panel

|                          |                                                        |
|--------------------------|--------------------------------------------------------|
| User interface           |                                                        |
| Operator element version | Integrated SDI standard for monitoring and diagnostics |
| Interface design         | RJ45 with 100 MBit/s Ethernet                          |
| Display design           | 1.4" graphic display                                   |
| Screen resolution        | 128 x 160 Pixel                                        |

### Inputs / outputs

|                         |                                            |
|-------------------------|--------------------------------------------|
| Standard digital inputs |                                            |
| Number                  | 6 (additionally 2 AI configurable as 2 DI) |
| Switching level: 0 → 1  | 11 V                                       |
| Switching level: 1 → 0  | 5 V                                        |
| Max. inrush current     | 4 mA                                       |
| Number as rapid input   | 1 (DI5)                                    |

|                          |                                             |
|--------------------------|---------------------------------------------|
| Fail-safe digital inputs |                                             |
| Number                   | 1 (additionally 4 DI configurable as 2 FDI) |

|                                    |                     |
|------------------------------------|---------------------|
| Digital outputs                    |                     |
| Number as relay changeover contact | 2                   |
| Output (resistive load)            | DC 30 V, max. 0.5 A |
| Number as transistor               | 1                   |
| Output (resistive load)            | DC 30 V, max. 0.4 A |

|               |                        |
|---------------|------------------------|
| Analog inputs |                        |
| Number        | 2 (Differential input) |
| Resolution    | 16 bit                 |

|                   |              |
|-------------------|--------------|
| Operating mode    |              |
| Voltage bipolar   | –10 ... 10 V |
| Voltage unipolar  | 0 ... 10 V   |
| Current           | 0 ... 20 mA  |
| Current monitored | 4 ... 20 mA  |

|                                      |      |
|--------------------------------------|------|
| Switching threshold as digital input |      |
| 0 → 1                                | 11 V |
| 1 → 0                                | 5 V  |

## Data sheet for SINAMICS G220

Article No. : 6SL4112-0CA17-0FF0

### Analog outputs

|                   |                         |
|-------------------|-------------------------|
| Number            | 1 (Non-isolated output) |
| Operating mode    |                         |
| Voltage unipolar  | 0 ... 10 V              |
| Current           | 0 ... 20 mA             |
| Current monitored | 4 ... 20 mA             |

### Motor temperature interface

|                                                                                                |
|------------------------------------------------------------------------------------------------|
| 1 input for motor temperature, connectable PTC, KTY 84, PT1000, and bimetal temperature switch |
|------------------------------------------------------------------------------------------------|

### PTC interface

|                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------|
| CU: short-circuit monitoring < 20 ohms, overtemperature > 1650 ohms, OM-SMT: type A, in accordance with IEC 60947-8, in accordance with EN 50495 |
|--------------------------------------------------------------------------------------------------------------------------------------------------|

### KTY84 interface

|                                                                                  |
|----------------------------------------------------------------------------------|
| Short-circuit monitoring < 500hm; wire breakage>21200hm; measurement current 2mA |
|----------------------------------------------------------------------------------|

### PTC1000 interface

|                                                                                   |
|-----------------------------------------------------------------------------------|
| Short-circuit monitoring < 6030hm; wire breakage>21200hm; measurement current 2mA |
|-----------------------------------------------------------------------------------|

| Closed-loop control techniques            |     |
|-------------------------------------------|-----|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC)       | Yes |
| V/f ECO linear / square-law               | Yes |
| Sensorless vector control                 | Yes |
| Vector control, with sensor               | Yes |
| Encoderless torque control                | Yes |
| Torque control, with encoder              | Yes |

| Ambient conditions                                        |                                     |
|-----------------------------------------------------------|-------------------------------------|
| Cooling                                                   | Air cooling using an integrated fan |
| Cooling air requirement                                   | 0.050 m³/s (1.766 ft³/s)            |
| Installation altitude (without derating)                  | 1,000 m (3,281.00 ft)               |
| Max. ambient temperature with derating                    | 60 °C                               |
| Ambient temperature with high overload (without derating) | 50 °C                               |
| Ambient temperature with low overload (without derating)  | 45 °C                               |
| Relative humidity during                                  |                                     |
| Max. operation                                            | 95 %                                |

| Environmental conditions                                                    |                                                                                                                                                                                                                                                              |
|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Chemically active substances                                                |                                                                                                                                                                                                                                                              |
| Operation                                                                   | Class 3C2, according to IEC 60721-3-3: 2002                                                                                                                                                                                                                  |
| Transport                                                                   | Class 2C2 according to IEC 60721-3-2:1997 in marine- and weather-resistant transport packaging                                                                                                                                                               |
| Storage                                                                     | Class 1C2 according to IEC 60721-3-1: 2002 in the transport packaging                                                                                                                                                                                        |
| Biologically active substances                                              |                                                                                                                                                                                                                                                              |
| Operation                                                                   | Class 3B1 according to IEC 60721-3-3: 2002                                                                                                                                                                                                                   |
| Transport                                                                   | Class 2B1 according to IEC 60721-3-2:1997 in the transport packaging                                                                                                                                                                                         |
| Storage                                                                     | Class 1B1 according to IEC 60721-3-1:1997 in the transport packaging                                                                                                                                                                                         |
| Mechanically active substances                                              |                                                                                                                                                                                                                                                              |
| Operation                                                                   | Class 3S1 according to IEC 60721-3-3: Ed. 2.2 2002 (Conductive dusts are not permitted.)                                                                                                                                                                     |
| Climatic environmental conditions                                           |                                                                                                                                                                                                                                                              |
| Operation                                                                   | Class 3K3 according to IEC 60721-3-3 Ed. 2.2: 2002                                                                                                                                                                                                           |
| Transport                                                                   | Class 2K4 according to IEC 60721-3-2:1997 in the transport packaging; temperature -40 ... +70 °C; relative atmospheric humidity 5..95% (without condensation)                                                                                                |
| Storage                                                                     | Class 1K4 according to IEC 60721-3-1:1997 in the transport packaging; temperature -25 ... +55 °C; relative atmospheric humidity 5..95% (without condensation), storage altitude <=4000m; condensation, spray water, ice formation, salt mist not permissible |
| Mechanical environmental conditions                                         |                                                                                                                                                                                                                                                              |
| Operation                                                                   | Class 3M1 according to IEC 60721-3-3 Ed. 2.2: 2002                                                                                                                                                                                                           |
| Transport                                                                   | Class 2M3 according to IEC 60721-3-2:1997 in the transport packaging                                                                                                                                                                                         |
| Storage                                                                     | Class 1M2 according to IEC 60721-3-1:1997 in the transport packaging                                                                                                                                                                                         |
| Integrated Safety functions                                                 |                                                                                                                                                                                                                                                              |
| Safety function "Safe Torque Off"                                           | Yes                                                                                                                                                                                                                                                          |
| Safe Stop 1 (SS1)                                                           | Yes                                                                                                                                                                                                                                                          |
| Safe Motor Temperature (SMT)                                                | Yes                                                                                                                                                                                                                                                          |
| Extended software functions can be enabled with a license using an SD card. |                                                                                                                                                                                                                                                              |

## Data sheet for SINAMICS G220

Article No. : 6SL4112-0CA17-0FF0

| Connections             |                                     |
|-------------------------|-------------------------------------|
| Signal cable            |                                     |
| Type                    | Push-in connection                  |
| Conductor cross-section | 0.20 ... 2.50 mm² (24 ... 12 AWG)   |
| Line side               |                                     |
| Type                    | screw terminal                      |
| Conductor cross-section |                                     |
| for single-core cables  | 10.00 ... 50.00 mm² (8 ... 1/0 AWG) |
| for multi-core cables   | 10.00 ... 50.00 mm² (8 ... 1/0 AWG) |
| Motor end               |                                     |
| Type                    | screw terminal                      |
| Conductor cross-section | 10.00 ... 50.00 mm² (8 ... 1/0 AWG) |
| DC link                 |                                     |
| Type                    | screw terminal                      |
| Conductor cross-section | 10.00 ... 50.00 mm² (8 ... 1/0 AWG) |
| PE connection           |                                     |
| Type                    | M5, screw terminal                  |
| Conductor cross-section | 10.00 ... 50.00 mm² (8 ... 1/0 AWG) |
| Max. motor cable length |                                     |
| Shielded                | 200 m (656.17 ft)                   |
| Unshielded              | 300 m (984.25 ft)                   |


| Mechanical data      |                     |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Frame size           | FSD2                |
| Net weight           | 22.6 kg (49.82 lb)  |
| Dimensions           |                     |
| Width                | 200 mm (7.87 in)    |
| Height               | 442 mm (17.4 in)    |
| Depth                | 245 mm (9.65 in)    |

| Memory card        |                          |
|--------------------|--------------------------|
| 1 slot for SD card | SINAMICS SD card, 8GByte |

| Certificates                                                                                                                        |                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Certificate of suitability                                                                                                          | CE, cULus (UL 61800-5-1, CSA 22.2 No. 274) , EAC, UKCA                                                             |
| CE marking                                                                                                                          |                                                                                                                    |
| EMC directive 2014/30/EU; Low Voltage Directive 2014/35/EU; RoHS Directive 2011/65/EU; energy efficiency and eco design 2009/125/EU |                                                                                                                    |
| Verification of suitability for fail-safety                                                                                         | SIL 3 according to IEC 61508 and IEC 61800-5-2, PL e according to ISO 13849-1, Category 4 according to ISO 13849-1 |
| Environmental compatibility                                                                                                         | RoHS II, REACH, Green Passport                                                                                     |
| Explosion protection                                                                                                                | according to ATEX Directive 2014/34/EU                                                                             |
| shipbuilding approval                                                                                                               | No                                                                                                                 |

| Converter losses to IEC61800-9-2* |                         |
|-----------------------------------|-------------------------|
| Efficiency class                  | IE2                     |
| In scope of Ecodesign Directive   | No (in the valid range) |
| Reason of exception               | no exception            |

|                              |                                                         |
|------------------------------|---------------------------------------------------------|
| IEC power loss data based on |                                                         |
| Input                        | 3 AC 230 V, 50 Hz                                       |
| Output                       | 3 AC 0 - 230 V, 50 Hz,<br>4 kHz Space-vector modulation |
| Rated apparent power         | 18.8 kVA                                                |
| Power loss in standby        | 28.8 W (0.2%)                                           |

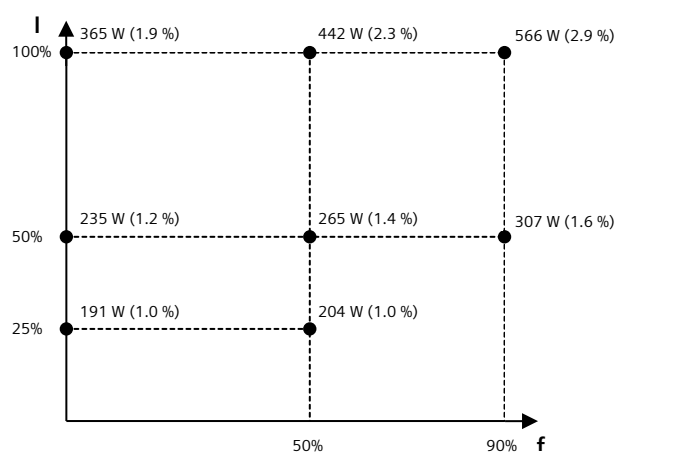

## Data sheet for SINAMICS G220

Article No. : 6SL4112-0CA17-0FF0

NEC power loss data based on


|                       |                                                         |
|-----------------------|---------------------------------------------------------|
| Input                 | 3 AC 240 V, 60 Hz                                       |
| Output                | 3 AC 0 - 240 V, 60 Hz,<br>4 kHz Space-vector modulation |
| Rated apparent power  | 17.9 kVA                                                |
| Power loss in standby | 28.8 W (0.2%)                                           |

the absolute power losses for motor voltages according to NEC (AC 230 V, AC 460 V, AC 575 V) are approximately 2 % lower

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

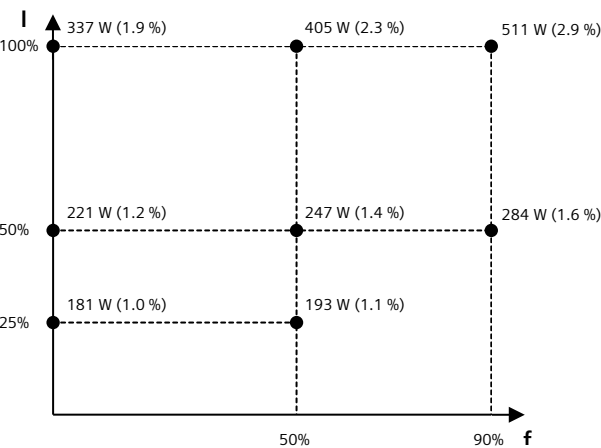

## Data sheet for SINAMICS G220

Article No. : 6SL4112-0CA17-0FF0

| Data sheet for Option Module OM-SMT (Safe Motor Temperature)                                                                                                                                                              |                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Electrical data                                                                                                                                                                                                           | Ambient conditions         |
| Operating voltage (DC)                                                                                                                                                                                                    | Ambient temperature during |
|                                                                                                                                                                                                                           |                            |
|                                                                                                                                                                                                                           |                            |
| Current demand, max.                                                                                                                                                                                                      | Operation                  |
| Power loss                                                                                                                                                                                                                | Transport                  |
|                                                                                                                                                                                                                           | Storage                    |
| Inputs / outputs                                                                                                                                                                                                          | Relative humidity          |
| PTC interface                                                                                                                                                                                                             | without condensation       |
| Type A, according to IEC 60947-8; short-circuit detection <10 Ohm; no short-circuit >20 Ohm; overtemperature >2100 Ohm; no overtemperature <1100 Ohm; measuring current 1.5 mA; 1x PTC warning; 1x PTC shutdown (safety). |                            |
| Mechanical data                                                                                                                                                                                                           | Connections                |
| Degree of protection                                                                                                                                                                                                      | Signal cable               |
| Net weight                                                                                                                                                                                                                | Version                    |
| Dimensions                                                                                                                                                                                                                | Conductor cross-section    |
| Width                                                                                                                                                                                                                     |                            |
| Height                                                                                                                                                                                                                    |                            |
| Depth                                                                                                                                                                                                                     | Certificates               |
|                                                                                                                                                                                                                           | Certificate of suitability |
|                                                                                                                                                                                                                           | Explosion protection       |