

I-SELECT 2 PLUG PRE / EXC

General

**Product description**

- _ Ready-for-use resistor to set output current value
- _ Compatible with LED Driver featuring I-select 2 interface; not compatible with I-select (generation 1)
- _ Resistor is base isolated
- _ Resistor power 0.25 W
- _ Current tolerance $\pm 2\%$ additional to output current tolerance
- _ Compatible with LED Driver series PRE and EXC

Example of calculation

- _ $R \text{ [k}\Omega\text{]} = 5 \text{ V} / I_{\text{out}} \text{ [mA]} \times 1000$
- _ Resistor value tolerance $\leq 1\%$; resistor power $\geq 0.1 \text{ W}$; base isolation necessary
- _ When using a resistor value beyond the specified range, the output current will automatically be set to the minimum value (resistor value too big), respectively to the maximum value (resistor value too small)


Website

<http://www.tridonic.com/28001118>



I-SELECT 2 PLUG PRE / EXC

General

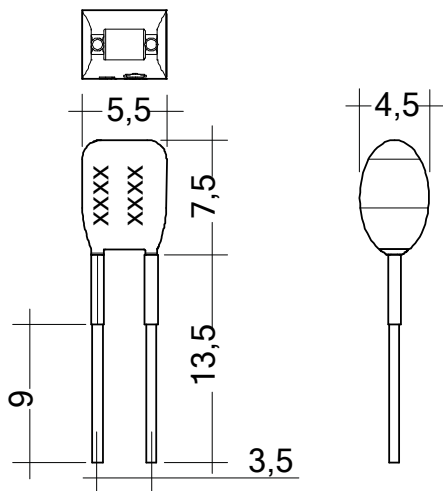

Ordering data

Type	Article number	Colour	Marking	Current	Packaging, bag	Weight per pc.
I-SELECT 2 PLUG 700MA BL	28001118	Blue	0700 mA	700 mA	10 pc(s).	0.001 kg