




Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > FPC Connectors

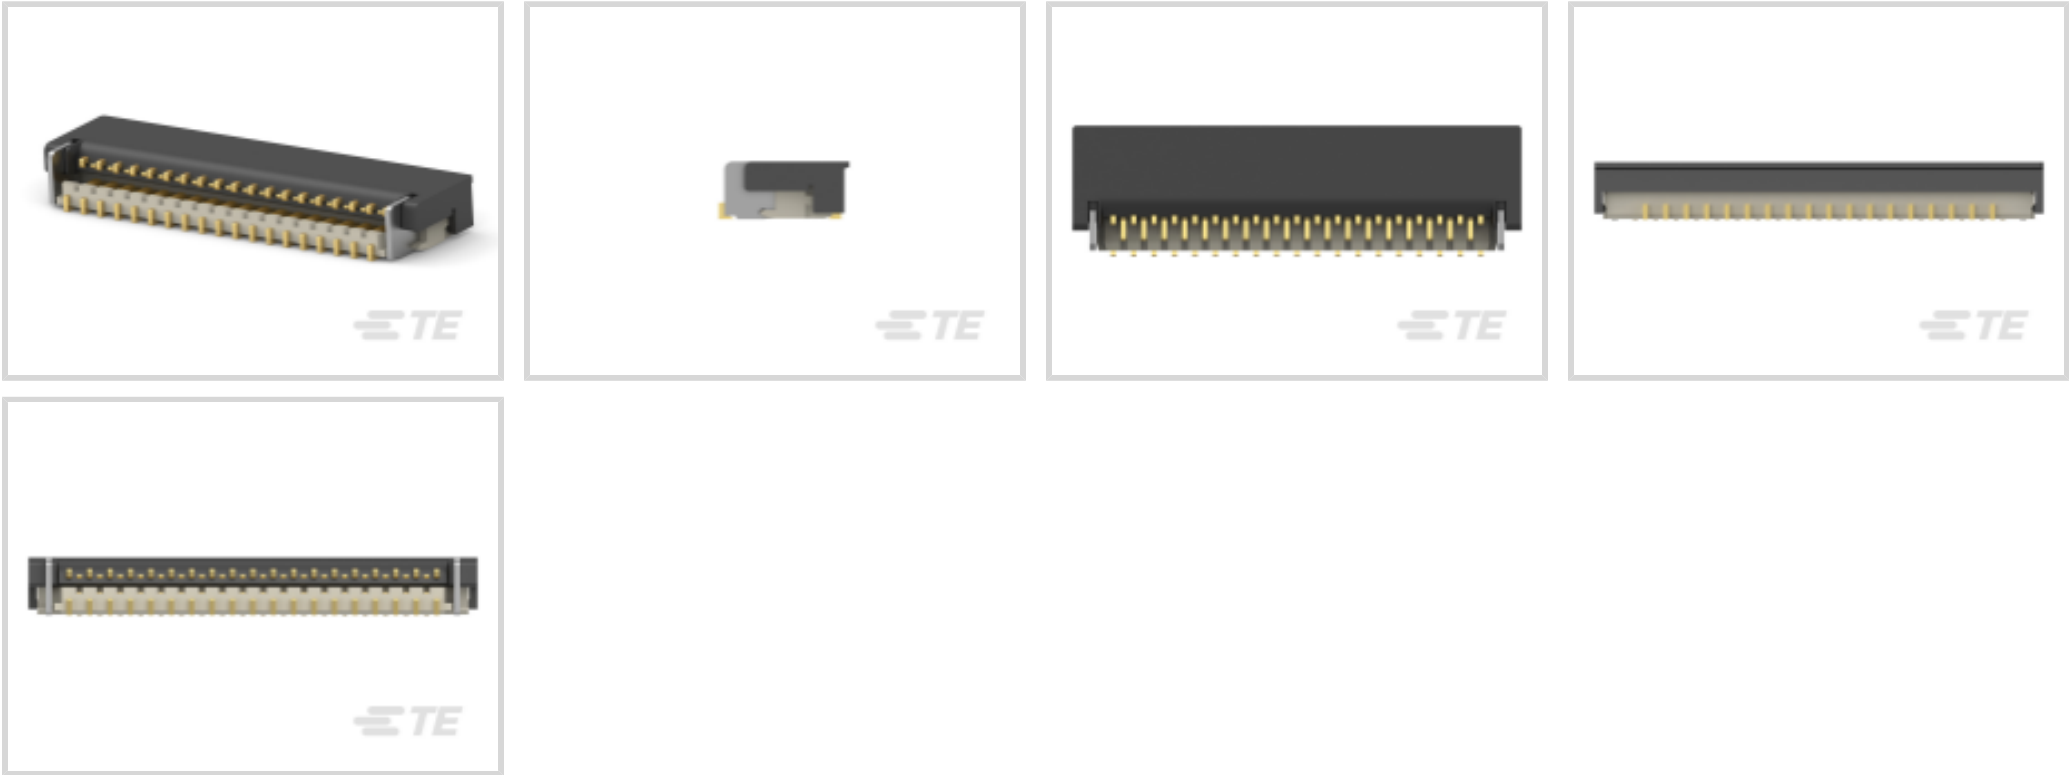

Centerline (Pitch): .25 mm [.009 in]

Mating Retention Type: Zero Insertion Force (ZIF)

PCB Mount Orientation: Right Angle

Contact Mating Location: Bottom

Termination Method to PCB: Surface Mount

Features

Product Type Features

Connector & Contact Terminates To	Flexible Printed Circuit (FPC)
Connector Product Type	Connector Assembly
Connector System	Flex-to-Board
PCB Connector Type	PCB Mount Receptacle
FPC Actuator Type	Back Flip-Lock

Configuration Features

Compatible With Wire & Cable Type	FFC, FPC
Number of Rows	1
PCB Mount Orientation	Right Angle
Number of Positions	37

Electrical Characteristics

Operating Voltage	50 VDC
-------------------	--------

Body Features

Primary Product Color	Natural
Actuator Color	Black



Contact Features

Contact Mating Area Plating Material Thickness	.1 μm[3.937 μin]
Contact Current Rating (Max)	.2 A
Contact Shape & Form	Single Beam
PCB Contact Termination Area Plating Material Thickness	.1 μm[3.937 μin]
Contact Layout	Staggered
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Gold
Contact Type	Socket
Contact Mating Location	Bottom
Contact Mating Area Plating Material	Gold Flash

Termination Features

Termination Post & Tail Length	.6 mm[.024 in]
Termination Method to PCB	Surface Mount

Mechanical Attachment

Connector Mounting Type	Board Mount
PCB Mount Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Mating Retention Type	Zero Insertion Force (ZIF)

Housing Features

Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	.25 mm[.009 in]

Dimensions

Accepts Flex Cable Thickness	.2 mm[.008 in]
Connector Width	3.2 mm[.126 in]
Connector Height	1.3 mm[.051 in]
Connector Length	11 mm[.433 in]

Usage Conditions

Operating Temperature Range	-25 – 85 °C[-13 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------



Identification Marking

Circuit Identification Feature	Without
--------------------------------	---------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	3500
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Reflow solder capable to 245°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Customers Also Bought




TE Part #CONSMP001-2-G
SMP Plug 50 Ohm PCB Through Hole Mount



TE Part #3-1415001-2
V23134J0052X511-EV-CBOX

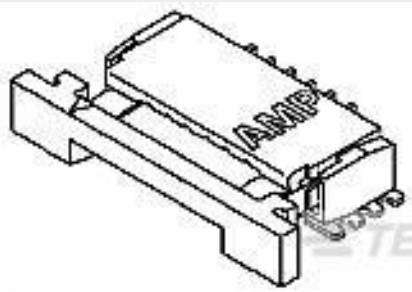

TE Part #2-84952-0
1MM FPC HORZ.BTTM CONT.ASS.20P

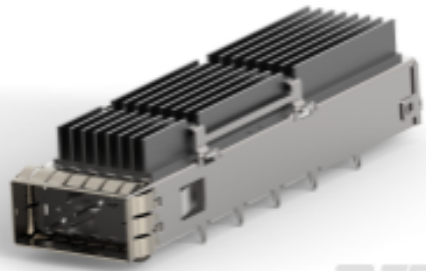


TE Part #2342933-2
QSFP-DD 1X1, STANDARD, W/ EXTRUDED HS



TE Part #3-1761603-3
IDC LOW PRO HDR 40P VERT BLUE



TE Part #2-406541-3
MJ,INV,1X1,6PNL G,.100"ST,SN, NARROW POST

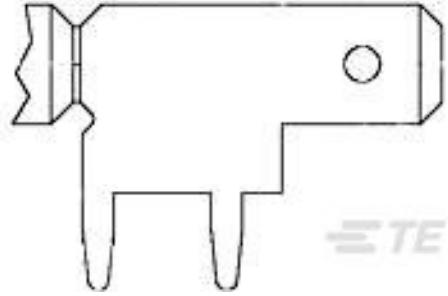


TE Part #1217061-1
187 FASTON,FLAG,TAB,TNBR



TE Part #1761987-9
ReceptacleConnAssm38PosTape/Re



TE Part #2324869-1
CONNECTOR ASSEMBLY, SMT, PDNI, OSFP

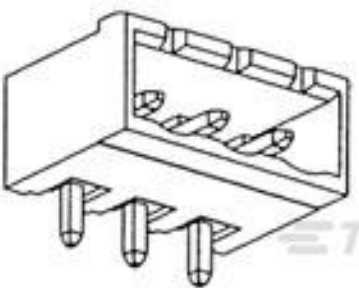

TE Part #796644-2
2POS 5.0MM CE R/A HDR,TRM BLK

Documents

Product Drawings
EMBOSS TAPING 0.25FPC BF-L-1.3

English

CAD Files
Customer View Model
ENG_CVM_CVM_1-2040832-4_E.3d_stp.zip

English

Customer View Model
ENG_CVM_CVM_1-2040832-4_E.3d_igs.zip

English

3D PDF

3D

Customer View Model
ENG_CVM_CVM_1-2040832-4_E.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages



[8-1773459-2_Fine_Pitch_FPC_conn_QRG](#)

English

[1-1773959-7-FPC-Connectors-CN](#)

English

Product Specifications

[0.25FPC BF-L-1.3H \(Slant type\)](#)

Japanese

Product Specification

Japanese

Instruction Sheets

[0.25FPC BF-L-1.3H](#)

Japanese

Instruction Sheet (non U.S.)

Japanese