



Image may differ from product. See technical specification for details.

TSN 517 A

V-ring seal

V-ring seals consist of a V-ring and a sheet steel sealing washer with a vulcanized rubber lip. The rubber lip fits into the seal groove in the housing. The washer is protected against corrosion. The seals are used to protect bearings from contamination or as secondary seals to protect primary seals in highly contaminated environments. They are a cost-effective and easy to install contaminant barrier for all kind of shafts. They are available in nitrile rubber. When ordering, please note that one item (seal pack) contains two seals.

- Easy to install
- Many variants
- Cost-effective

Overview

Dimensions

Shaft diameter	75 mm
Housing groove diameter	106 mm
Width	10.5 mm

Properties

Accessory type	Housing seal
Sealing type	V-ring
Material	Nitrile rubber with steel element


Logistics

Product net weight	0.095 kg
eClass code	23-05-17-90
UNSPSC code	31171519

Technical specification

Material

Nitrile rubber with steel element

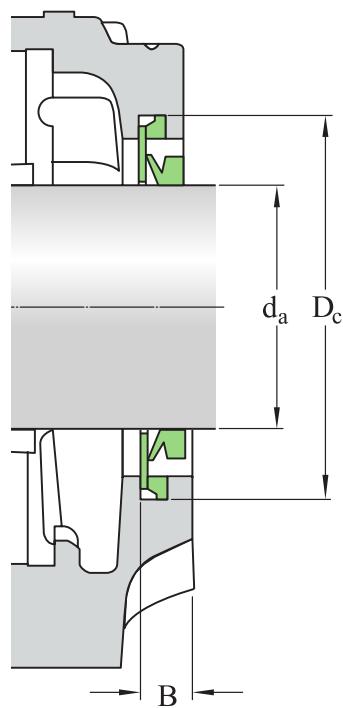

Dimensions

d _a	75 mm	Shaft diameter
D _c	106 mm	Diameter of seal groove
B	10.5 mm	Width



Terms of use