

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PVC, yellow, shielded, Plug angled M8, on Socket straight M8, cable length: 0.5 m

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1406054                        |
| Packing unit                         | 1 pc                           |
| Minimum order quantity               | 50 pc                          |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | BF1                            |
| Product key                          | AF1IBA                         |
| GTIN                                 | 4046356799928                  |
| Weight per piece (including packing) | 30.833 g                       |
| Weight per piece (excluding packing) | 30.22 g                        |
| Customs tariff number                | 85444290                       |
| Country of origin                    | US                             |

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## Technical data

### Product properties

|                      |                       |
|----------------------|-----------------------|
| Product type         | Sensor/actuator cable |
| Application          | Standard, U.S. cables |
| Number of positions  | 3                     |
| No. of cable outlets | 1                     |
| Shielded             | yes                   |
| Coding               | A                     |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Material specifications

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB                                          |
| Seal material                          | NBR                                         |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Contact material                       | CuSn                                        |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material for screw connection          | Zinc die-cast, nickel-plated                |
| Outer sheath, material                 | PVC                                         |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 48 V AC                    |
|                       | 60 V DC                    |
| Nominal current $I_N$ | 4 A                        |

### Mechanical properties

#### Mechanical data

|                             |            |
|-----------------------------|------------|
| Insertion/withdrawal cycles | $\geq 100$ |
|-----------------------------|------------|

### Signaling

|                        |    |
|------------------------|----|
| Status display         | no |
| Status display present | No |

### Connection data

#### Conductor connection

|                   |                        |
|-------------------|------------------------|
| Tightening torque | 0.2 Nm (M8 connectors) |
|-------------------|------------------------|

### Connector

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## Connection 1

|                     |                |
|---------------------|----------------|
| Type                | Plug angled M8 |
| Number of positions | 3              |


## Connection 2

|                     |                    |
|---------------------|--------------------|
| Type                | Socket straight M8 |
| Number of positions | 3                  |

## Cable/line

|              |       |
|--------------|-------|
| Cable length | 0.5 m |
|--------------|-------|

## PVC yellow 105 °C [542]

|                                               |                                                                                     |
|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing                           |  |
| Cable weight                                  | 33 kg/km                                                                            |
| UL AWM Style                                  | 2517 (105 °C / 300 V)                                                               |
| Number of positions                           | 3                                                                                   |
| Shielded                                      | yes                                                                                 |
| Cable type                                    | PVC yellow 105 °C [542]                                                             |
| Conductor structure signal line               | 32x 1.10 mm                                                                         |
| AWG signal line                               | 24                                                                                  |
| Wire diameter incl. insulation                | 1.12 mm ±0.03 mm                                                                    |
| External cable diameter                       | 4.70 mm ±0.2 mm                                                                     |
| Outer sheath, material                        | PVC                                                                                 |
| External sheath, color                        | yellow                                                                              |
| Conductor material                            | Tin-plated Cu litz wires                                                            |
| Material wire insulation                      | PVC                                                                                 |
| Single wire, color                            | brown, blue, black                                                                  |
| Overall twist                                 | 3 wires, twisted                                                                    |
| Optical shield covering                       | 85 %                                                                                |
| Max. conductor resistance                     | max. 79.7 Ω/km (20 °C)                                                              |
| Insulation resistance                         | ≥ (550 M Ohms/m @ 500V)                                                             |
| Nominal voltage, cable                        | 300 V                                                                               |
| Minimum bending radius, flexible installation | 12 x D                                                                              |
| Smallest bending radius, movable installation | 57 mm                                                                               |
| Flame resistance                              | FT4                                                                                 |
| Other resistance                              | UV resistant                                                                        |
| Ambient temperature (operation)               | -30 °C ... 105 °C (cable, fixed installation)                                       |

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

|  |                                                 |
|--|-------------------------------------------------|
|  | -5 °C ... 105 °C (Cable, flexible installation) |
|--|-------------------------------------------------|

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Degree of protection            | IP65                             |
|                                 | IP67                             |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |

## Standards and regulations

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M8 connector    |
| Standards/specifications | IEC 61076-2-104 |


# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable

1406054

<https://www.phoenixcontact.com/in/products/1406054>


## Drawings

Circuit diagram

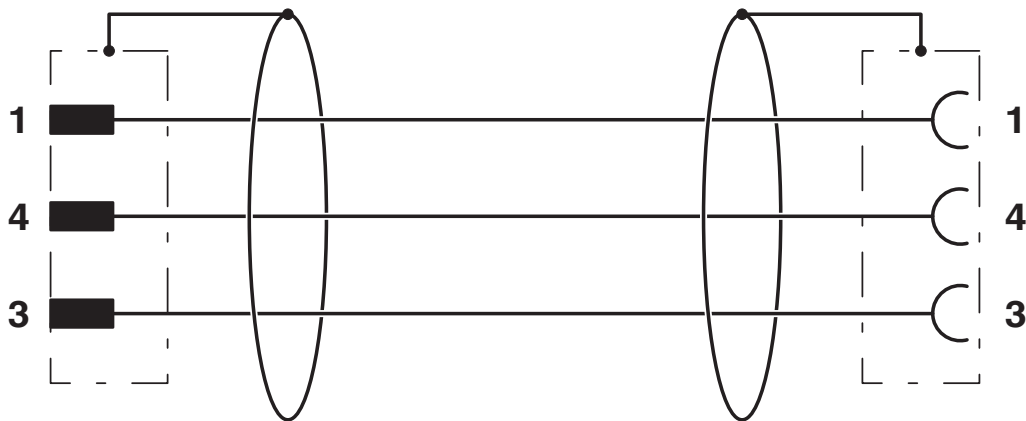

Contact assignment of M8 plugs/sockets

Schematic diagram

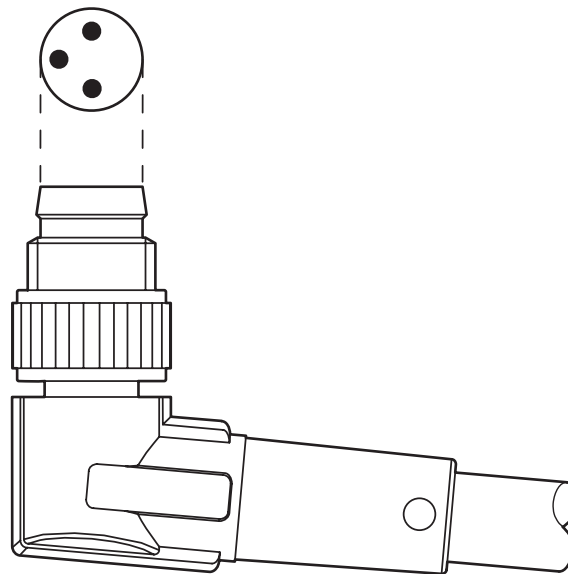

Layout of connector pin assignments

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable

1406054


<https://www.phoenixcontact.com/in/products/1406054>

Schematic diagram



Pin assignment M8 plug, 3-pos., view male side

Dimensional drawing

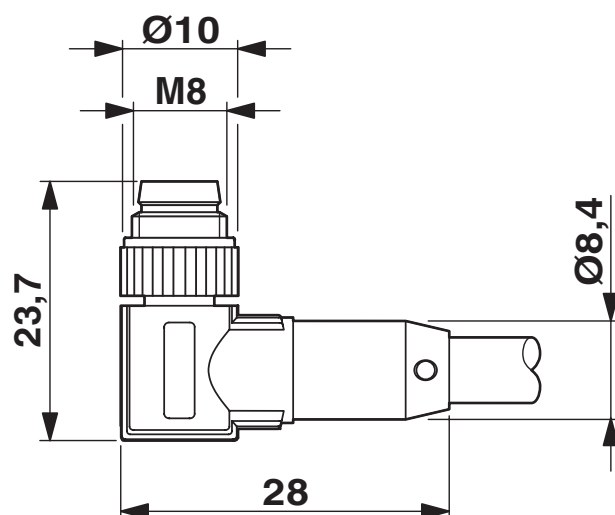


Plug M8 x 1, angled, shielded

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable

1406054


<https://www.phoenixcontact.com/in/products/1406054>

Dimensional drawing

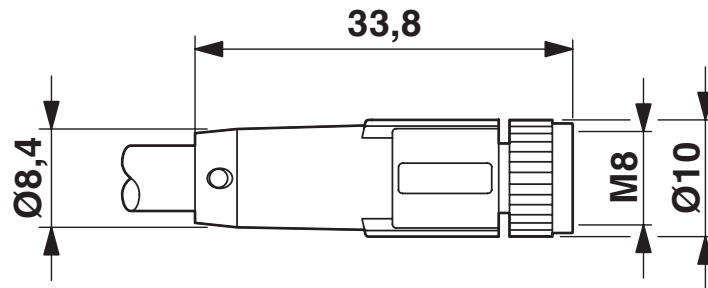

Socket M8 x 1, straight, shielded

Schematic diagram

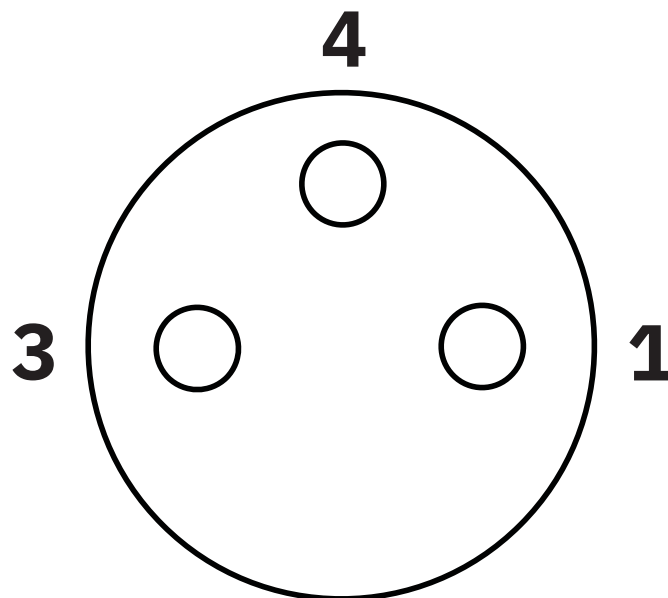

Pin assignment M8 socket, 3-pos., view female side

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1406054>

|                                                                                                                                  |                       |                       |                   |                             |
|----------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>UL Listed</b><br>Approval ID: FILE E 221474 |                       |                       |                   |                             |
|                                                                                                                                  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                  | 125 V                 | 4 A                   | -                 | -                           |

|                                                                                                                                   |                       |                       |                   |                             |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>cUL Listed</b><br>Approval ID: FILE E 221474 |                       |                       |                   |                             |
|                                                                                                                                   | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                   | 125 V                 | 4 A                   | -                 | -                           |

|                                                                                                                                         |  |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|  <b>EAC-RoHS</b><br>Approval ID: RU D-DE.HB35.B.00387 |  |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|                                                                                                                                     |                       |                       |                   |                             |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>cUL Listed</b><br>Approval ID: FILE E 221474 |                       |                       |                   |                             |
|                                                                                                                                     | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                     | 60 V                  | 4 A                   | -                 | -                           |

|                                                                                                                                    |                       |                       |                   |                             |
|------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>UL Listed</b><br>Approval ID: FILE E 221474 |                       |                       |                   |                             |
|                                                                                                                                    | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                    | 60 V                  | 4 A                   | -                 | -                           |

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## Environmental product compliance

### EU RoHS

|                                         |      |
|-----------------------------------------|------|
| Fulfills EU RoHS substance requirements | Yes  |
| Exemption                               | 6(c) |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 40826646-b3e3-41be-a144-fdc4cd7a3a5f |

### EF3.0 Climate Change

|         |               |
|---------|---------------|
| CO2e kg | 0.395 kg CO2e |
|---------|---------------|

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## Accessories

### PROT-M 8 FS-PA-CHAIN - Sealing cap

1430857

<https://www.phoenixcontact.com/in/products/1430857>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 plugs



---

### UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/in/products/0801453>



Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 30, text field height: 4 mm, text field width: 23 mm

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/in/products/0819411>



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 24, text field height: 4 mm, text field width: 23 mm

---

## US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/in/products/0828769>



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 56, text field height: 4 mm, text field width: 23 mm

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/in/products/0831004>



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 3000, text field height: 4 mm, text field width: 23 mm

---

## PROT-M 8 MS-PA-CHAIN - Screw plug

1430860

<https://www.phoenixcontact.com/in/products/1430860>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/in/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/in/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

# SAC-3P-M8MR/0,5-542/M8FS SH BK - Sensor/actuator cable



1406054

<https://www.phoenixcontact.com/in/products/1406054>

## SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/in/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

---

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)