


FEATURES

- **Annealed Copper Conductor:** Provides excellent conductivity and flexibility
- **Polyvinyl Chloride Jacket:** Offers protection against environmental factors and mechanical stress
- **5 Core Design:** Suitable for complex wiring requirements
- **Temperature Range -15 °C to 70 °C:** Ensures performance in diverse conditions
- **Voltage Rating 500 V:** Suitable for medium voltage applications
- **Plain Conductor Type:** Enhances ease of installation
- **White Jacket Colour:** Aesthetic and easy to identify in installations

RS PRO 1.5 mm² Flexible Cable, 5 Core

RS Stock No: 606-089

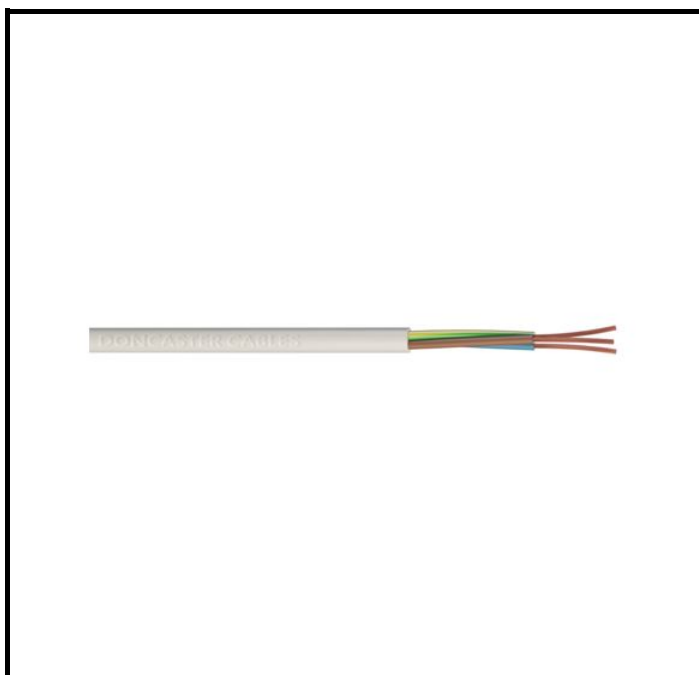

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This RS PRO flexible cable is designed for reliable electrical connections in various industrial and commercial applications. With a robust construction, it ensures efficient power transmission and is ideal for environments requiring flexibility and durability.

General Specifications

Conductor Material	Annealed Copper
Conductor Type	Plain
Jacket Colour	White
Product Type	Flexible Cable

Mechanical Specifications

Cable CSA	1.5 mm ²
Cable Length	100 m
Core Strands	30/0.25
Jacket Material	Polyvinyl Chloride
Number of Cores	5
Outside Diameter	11.6 mm

Operation Environment Specifications

Maximum Operating Temperature	70 °C
Minimum Operating Temperature	-15 °C

Approvals

Standards/Approvals	ACI, BASEC ISO 9001 UKAS CS1-029, BS EN 50363-3, BS EN 50363-4-1, BS EN 50525-2-11, BS EN 60228
---------------------	---

Electrical Specifications

Voltage	500 V
---------	-------