MATERIALS AND FINISHES

BODY ZINC ALLOY
PLATED NICKEL

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD

INSULATOR POLYPROPYLENE (94-V0)

MOUNTING POST PHOSPHOR BRONZE
PLATED TIN

SOLDER TAIL COPPER OVER STEEL
PLATED TIN

JAM NUT BRASS
PLATED NICKEL

LOCK WASHER PHOSPHOR BRONZE
PLATED NICKEL

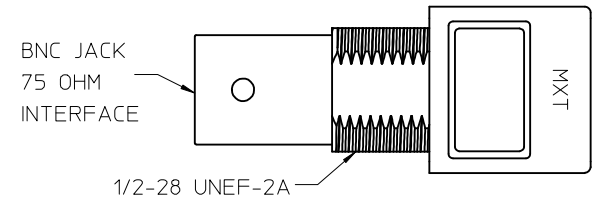

TOP VIEW



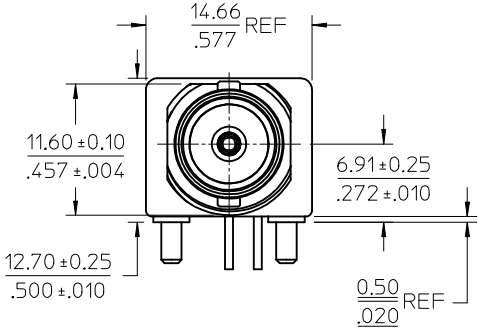

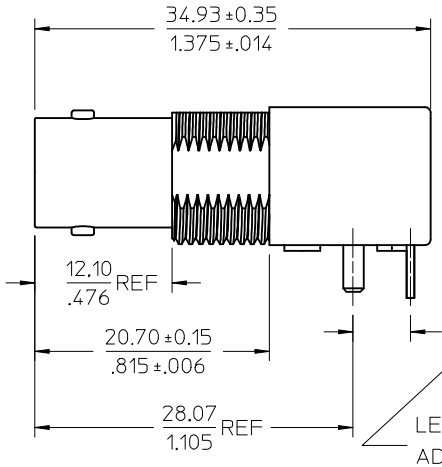

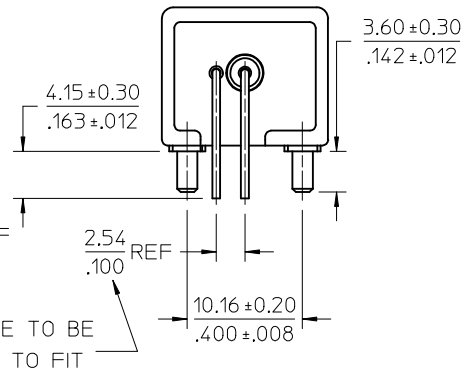

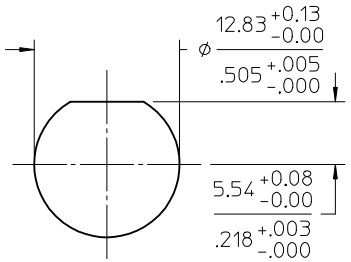

RECOMMENDED MOUNTING HOLE
PANEL THICKNESS: 5.50 (.216) MAX
RECOMMENED MOUNTING TORQUE:
1.36 N-m (12 INCH LBS) MAX

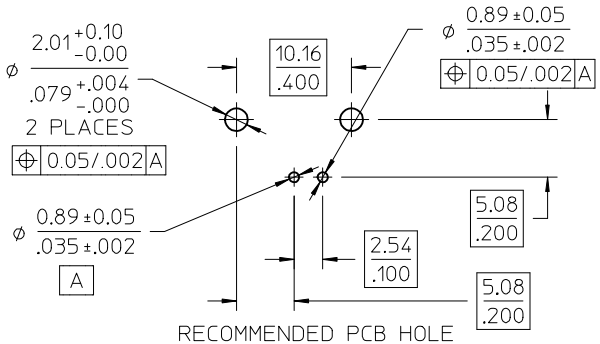

RECOMMENDED PCB HOLE
CONFIGURATION

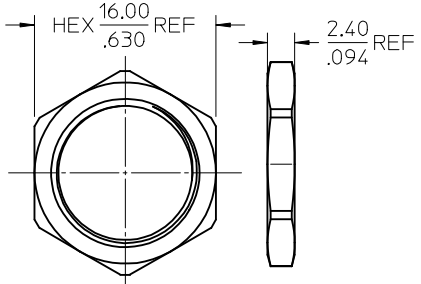

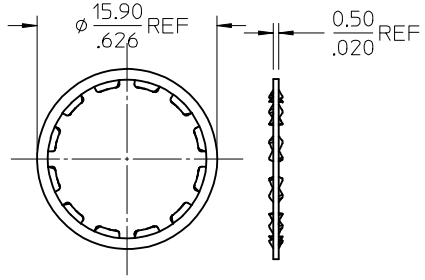

PART NO.	DESCRIPTION
73171-4340	QTY (1) OF 73101-0400 IN SINGLE BAG WITH LABEL
73101-0401	WITH JAM NUT AND WASHER; PACKAGING BY TRAY
73101-0400	WITHOUT JAM NUT AND WASHER; PACKAGING BY TRAY

SPECIFICATION	DESCRIPTION
PS-89675-1030	PRODUCT SPECIFICATION

CHG: ADDED PKG
PER RF15-E286
EC NO: URF2016-0101 2015/08/14
DRWN: CWEI02
CHKD:
APPR: YCHENG 2015/08/19
DESCRIPTION
REV

A4

QUALITY SYMBOLS
E =0
E =0
E =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	±	±
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE:
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	MICHAEL	2007/06/07
CHECKED BY	KERRIE	2007/06/07
APPROVED BY	MISEN	2007/06/07

TITLE: BNC JACK,R/A PCB,75 OHMS
DIE CAST, RECEPTACLE
BNC-J/RA/PCB

molex

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-73101-040
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION