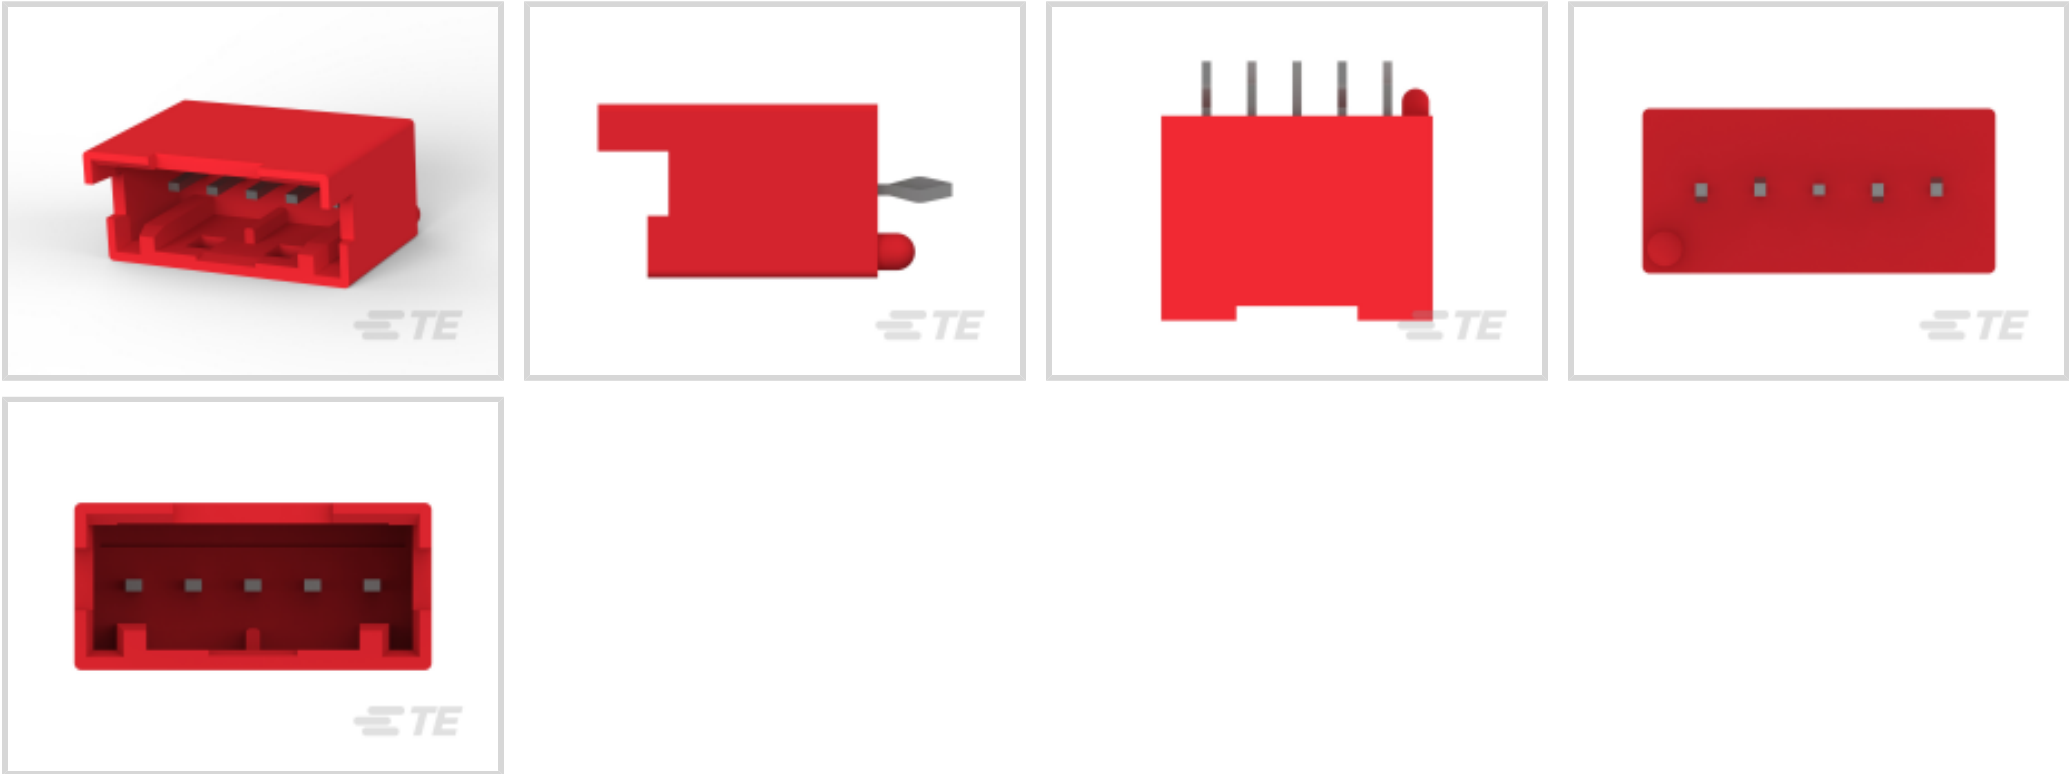




Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **5**

Number of Rows: **1**

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	5
Number of Rows	1

Electrical Characteristics

Operating Voltage	50 VDC
-------------------	--------

Body Features

Primary Product Color	Red
-----------------------	-----



Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
Mating Tab Width	.7 mm[.028 in]
PCB Contact Termination Area Plating Material Thickness	1 µm[39.37 µin]
Contact Layout	Inline
Contact Base Material	Brass
Mating Tab Thickness	.5 mm[.02 in]
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Finish	Matte
Contact Mating Area Plating Material	Tin (Sn)
Contact Type	Tab
Contact Current Rating (Max)	3.5 A

Termination Features

Termination Post & Tail Length	3 mm[.118 in]
Square Termination Post & Tail Dimension	.5 mm[.02 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Retention	With
Mating Alignment Type	Polarization
PCB Mount Retention Type	Kinked
PCB Mount Alignment Type	Boss
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Housing Material	6/6 Nylon GF
Centerline (Pitch)	2.5 mm[.098 in]

Dimensions



Connector Width	7 mm[.27 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Connector Height	11.3 mm[.44 in]
Connector Length	15 mm[.59 in]

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Agency/Standards Products	UL
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	300
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

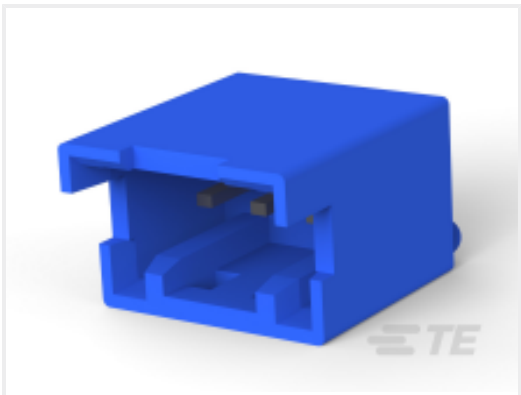
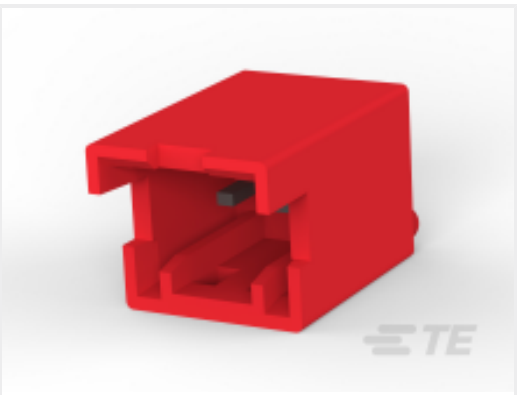
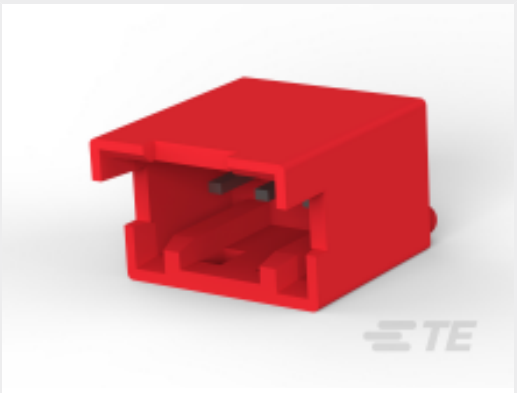
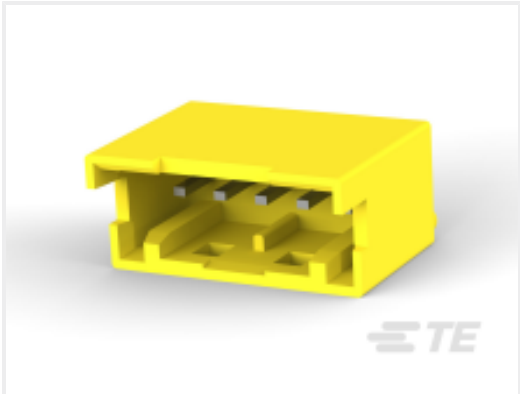
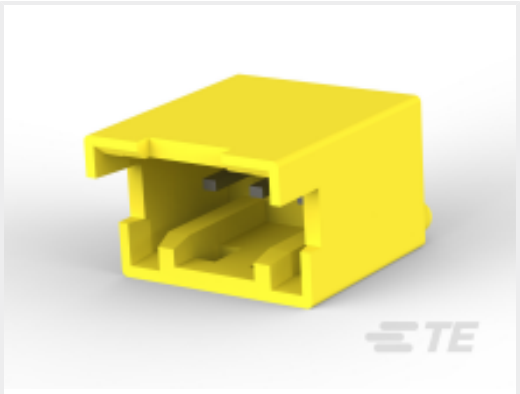
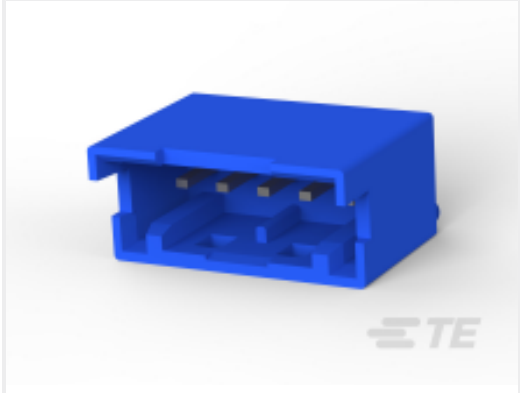
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

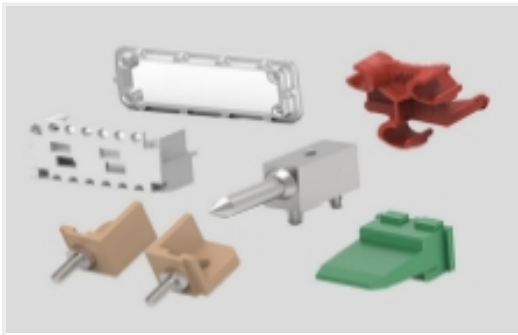
Compatible Parts

 TE Part # 1-1871843-8 GIC 2.5 HDR ASSY TIN VERSION 8P RED	 TE Part # 2-1871843-3 GIC 2.5 HDR ASSY TIN VERSION 3P BLUE	 TE Part # 1903535-1 GIC 2.5 PITCH CONN. HDR Assy (5 POS)	 TE Part # 1-1871843-2 GIC2.5 HDR ASSY TIN VERSION 2P RED
 TE Part # 1747067-5 GRACE INERTIA CONN 2.5 HDR ASSY 5P NATUR	 TE Part # 1871843-4 GIC2.5 HDR ASSY TIN VERSION 4P NATURAL	 TE Part # 1-1871843-6 GIC2.5 HDR ASSY TIN VERSION 6P RED	 TE Part # 1-1871843-3 GIC 2.5 HDR ASSY TIN VERSION 3P RED
 TE Part # 3-1871843-5 GIC 2.5 HDR TIN VERSION 5P YELLOW	 TE Part # 2069625-1 GIC 2.5 HDR ASSY TIN VERSION 4/6P	 TE Part # 3-1871843-3 GIC 2.5 HDR ASSY TIN VERSION 3P YELLOW	 TE Part # 2134303-1 GIC 2.5 HDR ASSY TIN VERSION 2/4P
 TE Part # 2-1871843-5 GIC 2.5 HDR ASSY TIN VERSION 5P BLUE	 TE Part # 2013485-1 GIC 2.5 HDR ASSY TIN VERSION 3/5P	 TE Part # 1871843-8 GIC2.5 HDR ASSY TIN VERSION 8P NATURAL	

Also in the Series | GRACE INERTIA 2.5



Connector Contacts(6)



Connector Hardware(7)



Power Contacts(2)



Rectangular Connector Housings(60)



Rectangular Power Connectors(11)



Standard Rectangular Connectors(60)

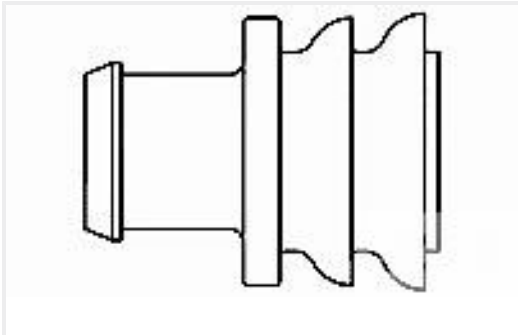


Wire-to-Board Connector Assemblies & Housings(36)

Customers Also Bought



TE Part #CAT-AM71-CH8172
AMP SUPERSEAL 1.5MM,
CONNECTOR HOUSING



TE Part #281934-2
SINGLE WIRE SEAL



TE Part #CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #DT06-2S
PLG, 2P, GRY, N



TE Part #CAT-D487-W416
Wedgelocks: DEUTSCH DT



TE Part #114017-ZZ
SEALING PLUG, SIZE 12/16, WHT

Documents

Product Drawings

GIC 2.5 HDR ASSY TIN VERSION 5P RED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1871843-5_D.2d_dxf.zip

1-1871843-5

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, GRACE INERTIA 2.5



English

Customer View Model

[ENG_CVM_CVM_1-1871843-5_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1871843-5_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

[Product Specifications](#)

[Application Specification](#)

English