

Brad® Micro-Change® (M12) A-Code Single-Ended Cordsets (Europe)

120006/120065

Male, Pigtail
Straight, Right Angle



Features and Benefits

- M12 Single Keyway (A-Coding) IEC compliant cordset assemblies
- 3, 4, and 5-pole versions are intermatable for added flexibility
- IP67/68 rated for harsh environments
- Patented anti-vibration feature to prevent loosening under high vibration applications
- Wide selection of cables to fit applications
 - PVC cables for light, cost sensitive industrial applications
 - PUR cables for moderate flexing and for environments encountering cutting fluids and oils
 - TPE cables for continuous flex applications. Also ideal for welding cells; cable is weld slag resistant

Physical

Connector Body: PUR
 Contact Carries: Polyamide
 Coupling Nut: Nickel-plated Brass
 Contacts: Copper alloy with Gold over Nickel plating
 Cables: P02—Black PUR/PVC jacket, 0.25mm² PVC conductors, 300V, 80°C
 H08—Black PUR jacket, 0.25mm² PVC conductors, 300V, 80°C, Low Smoke/Zero Halogen (LSOH), UL AWM 21198
 H45—Black PUR jacket, 26 AWG PVC conductors, 300V, 80°C, UL AWM 20549


Environmental

Protection: IP67
 NEMA Rating: NEMA 6

Poles (Male View)	Max. Current per Contact	Max. Voltage	Cable Type	Cable Jacket (Cable Code)	Wire Size	Length	Male Straight		Male Right Angle		
							Engineering No.	Standard Order No.	Engineering No.	Standard Order No.	
8 Pole 1 - White 5 - Gray 2 - Brown 6 - Pink 3 - Green 7 - Blue 4 - Yellow 8 - Red	2.0A	30V AC/36V DC	PUR/PVC (P02)	LSOH, UL 21198	PUR (H08)	0.25mm ²	2.0m	808006P02M020	120065-0964	808007P02M020	120065-1800
			808006H08M020					120065-8660	808007H08M020	120065-8757	
12 Pole 1-White 5-Gray 9-Black 2-Brown 6-Pink 10-Violet 3-Green 7-Blue 11-Gray-Pink 4-Yellow 8-Red 12-Red-Blue	1.5A	30V AC/DC	UL 20549	PUR (H45)	26 AWG	2.0m	80C006H45M020	120065-5045	80C007H45M020	120065-5109	

Note: Sales drawings for all standard order numbers are available on molex.com

Configuration Code*
Build-a-Part Number

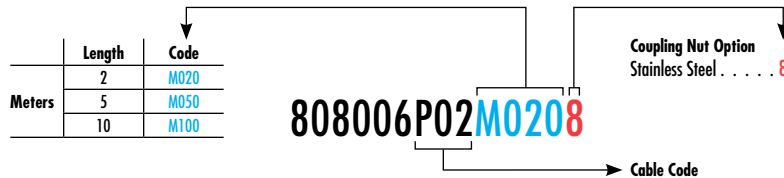

*Once an engineering number is created using the configuration code, consult Molex tech support for information regarding any part numbers.