

KombiSIGN 70 / LED Permanent Beacon 843
LED Perm. light element 24VAC/DC YE



| | |
|-----------|--------------|
| Part No.: | 843.300.55 |
| Series: | KombiSIGN 70 |

**MECHANICAL DATA**

| | |
|-----------------------------|--------|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Yellow |
| Protection category | IP54 |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 82 g |
| Product weight | 68 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 30 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

OPTICAL DATA

| | |
|----------------------|-------------------|
| Light source | LED |
| Light colour | Yellow |
| Optical signal image | Permanent |
| Service life optical | 100,000 h maximum |

APPROVAL DATA

| | |
|-----------------------------|---------|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with RED directive | No |
| Conform with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with AS-I | No |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / LED Permanent Beacon 843
LED Perm. light element 24VAC/DC YE

| | |
|-----------------------|----|
| ICAO Certification | No |
| Conforms with GL | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

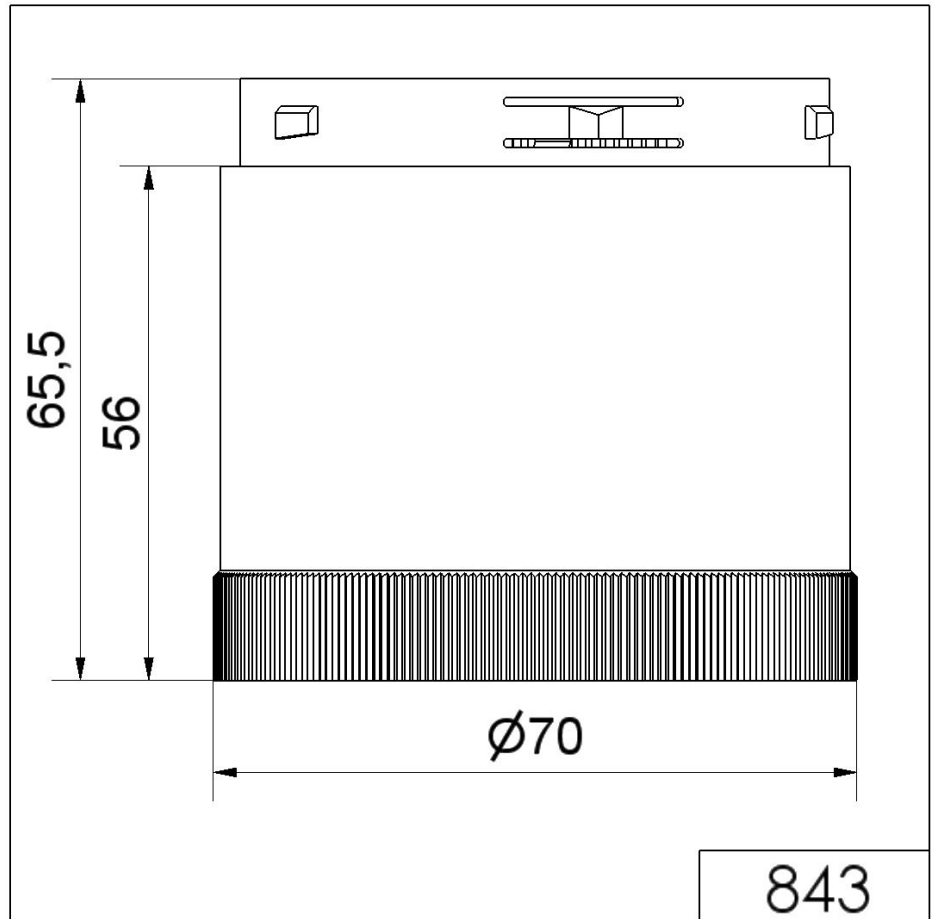

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.