


SPECIFICATIONS						
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	4.0 A					
RATED VOLTAGE [V]	250 V					
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW					
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTORS [AWG]	3x22 AWG					
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K					

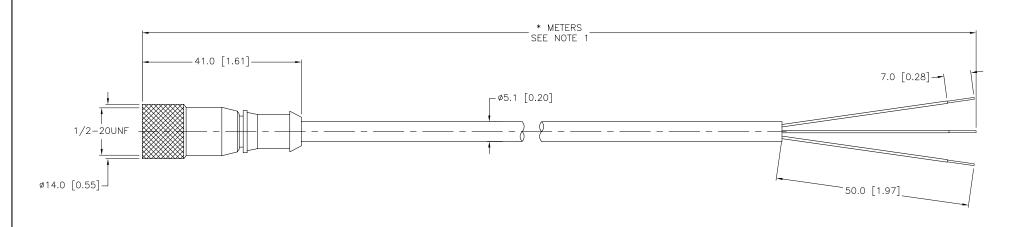

CABLE LENGTH	TOLERANCE		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		

## SOURCE DRAWING - FOR REFERENCE ONLY

## NOTES: 1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED AND TINNED.

D	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

	RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF			3000 CAMPUS MINNEAPOLIS, MN		
	2. 3. 4.	⊕ ←	TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology Sensors and Automation Controls  1–80 (763 (763)			00-544-7769 3) 553-7300 3) 553-0708 fax turck.com	
	MATERIAL		DRFT JBJ	DATE 02/16/01	DESCRIPTION KB 31	г *		
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	NB 31	<del>- "</del>		
		DRAWING ARE FOR REFERENCE ONLY			IDENTIFICATION NO.		REV	
	FINISH	CONTACT TURCK	MILLIMETE	ER[INCH]	IDENTIFICATION NO.			
71	SEE SPECIFICATIONS	FOR MORE INFORMATION						
NΩ			DO NOT SCALE	THIS DRAWING	FILE: 777000598	SHEET	1 OF 1	