RSC-Series

The RSC-Series Super Curvette single pole rocker switches are physically similar to the Curvette Series. These switches offer higher electrical ratings with up to 125 amp peak inrush capability.

Specifications

- Certifications*: UL, CSA, VDE
- Dielectric Strength: 1,000 V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Nylon
- Actuator Material: Polyester or Nylon

* Due to ongoing technological advances, consult factory for certification specifics.

Dimensional Specifications: in. [mm]

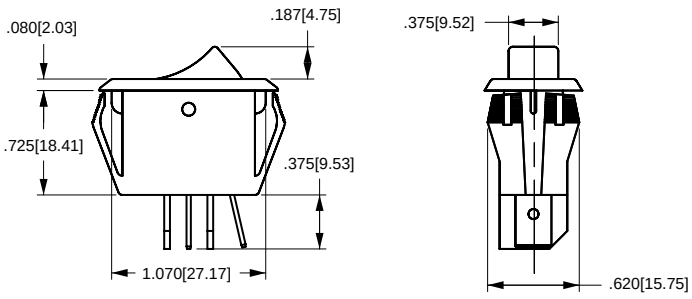

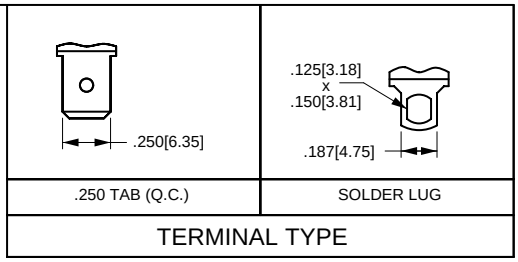

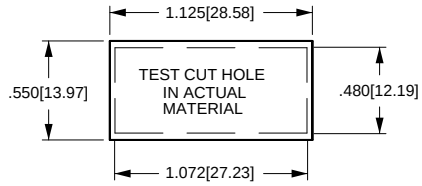

MOUNTING HOLE
Panel Thickness: .025 min. - .187 max.
Specific cutout dimension range dependent on panel thickness and material. Consult factory.

RSC A 70 1 - V B - B - 0 - V

SERIES

RSC SINGLE POLE

CIRCUIT

A OFF-NONE-ON
B ON-NONE-ON

RATING

60 15A 250VAC
20A 125VAC
3/4HP 125-250VAC
6(6)A 250VAC 50E3 T85
61 15A 250 VAC
20A 125VAC
6(6)A 250VAC 50E3 T85
70 15A 250VAC
20A 125VAC
3/4HP 125-250VAC
16(6)A 250VAC T85
71 15A 250VAC
20A 125VAC
16(6)A 250VAC T85

TERMINATION

0 SOLDER LUG
1 .250TAB (QC)

ACTUATOR STYLE

R ROCKER
V TWO COLOR VISI-ROCKER

ACTUATOR COLOR[1]

B BLACK
W WHITE

BASE COLOR[1]

B BLACK
W WHITE

COLOR OF MOLDED-IN LEGEND AND/OR VISI-ROCKER END[1]

N NOT APPLICABLE
B BLACK
V VISI-RED
W WHITE

ROCKER FACE LEGEND

MOLDED-IN[2]		INK TRANSFER STAMP[3]
0	NO LEGEND	**0**
1	OFF-ON (VERTICAL)	**A**
2	OFF-ON (HORIZONTAL)	**B**
8	O-I (HORIZONTAL)	**D**
9	O-I (VERTICAL)	**E**
	ON-OFF (VERTICAL)	**F**
	ON-OFF (HORIZONTAL)	**G**
	OFF O-I ON (VERTICAL)	**H**

NOTES:
Shading indicates standard configurations.
Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.
1 Matte finish is standard. Custom colors are available. Consult factory.
2 Molded-in Legend available only with Visi-Rocker option.
3 White is standard with dark actuators; black is standard with light actuators.