




Connectors > Automotive Connectors > Automotive Connector Accessories > Automotive Connector Locks & Position Assurance

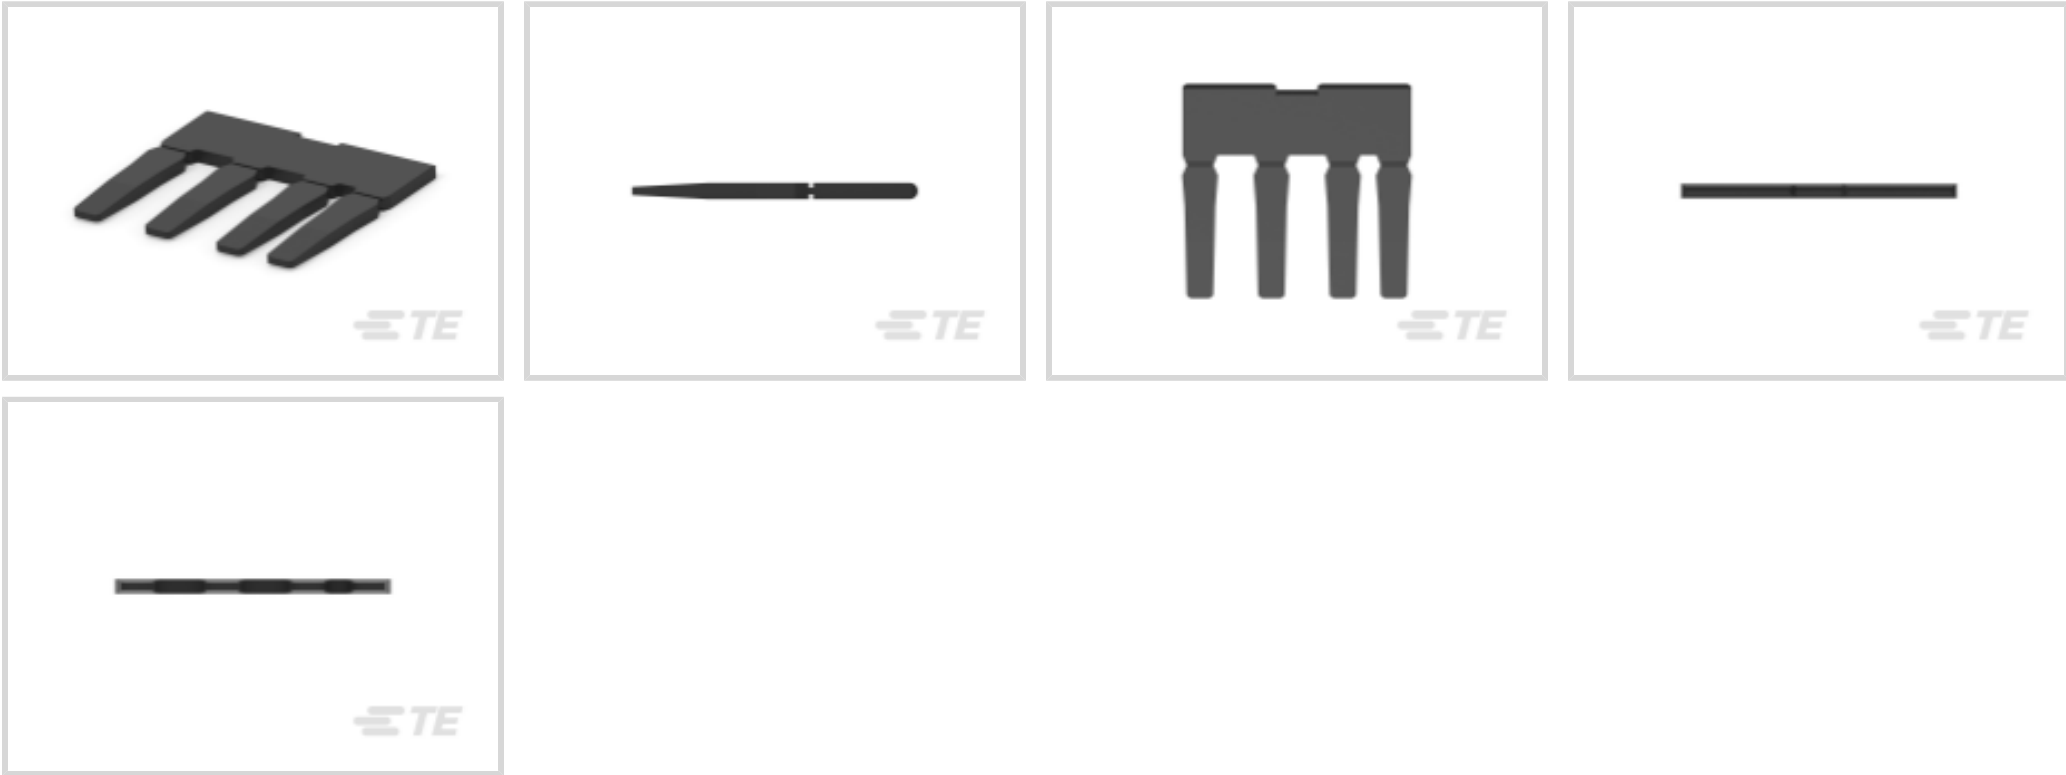

Primary Product Color: **Black**

Connector & Contact Retention Accessory Type: **Double Lock Plate**

Primary Product Material: **PBT**

Operating Temperature Range: **-30 – 105 °C [-22 – 221 °F]**

Features

Product Type Features

Connector & Contact Retention Accessory Type	Double Lock Plate
--	-------------------

Body Features

Primary Product Color	Black
Primary Product Material	PBT

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 881572-1

BUSBAR,STAMPED,CUSN4,0.4MM,2 POSN

Also in the Series | Mark II

Automotive Connector Locks & Position Assurance(1)

Automotive Housings(6)

Automotive Terminals(3)

Connector Seals & Cavity Plugs(1)

Crimp Terminal Housings(76)

Insertion & Extraction Tools(2)

Quick Disconnects(57)



Customers Also Bought

TE Part #172496-1
MIC PLUG HSG 9P (MK II)

TE Part #172498-1
MIC PLUG HSG 13P (MK II)

TE Part #174397-2
MIC MK-2 DBL LOCK PLATE 9P

TE Part #172497-1
MIC MARK-2 PLUG HSG 11P

TE Part #172047-2
DLI HSG 20 POS MOD IV TYPE

TE Part #172504-1
MIC CAP HSG 5P MK II

TE Part #368538-1
070 MLC PLUG 2P HSG

TE Part #174395-2
MIC-MK2 DBL LOCK PLATE 5P

TE Part #172245-2
12P DLI PLUG HSG

TE Part #172776-1
MIC MARK-2 REC CONTACT L.P

Documents

Product Drawings

MIC-MK2 DBL LOCK PLATE 7POS.

English

CAD Files

Customer View Model

ENG_CVM_174396-2_O.3d_igs.zip

English

Customer View Model

ENG_CVM_174396-2_O.3d_stp.zip

English

Customer View Model

ENG_CVM_174396-2_O.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Product Specifications

Multi-Interlock Mark II Connector for Wire to Board Termination

English

Product Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English

Mounting Double Lock Plate for MIC-MKII Conn.

English