




Color: ■ black





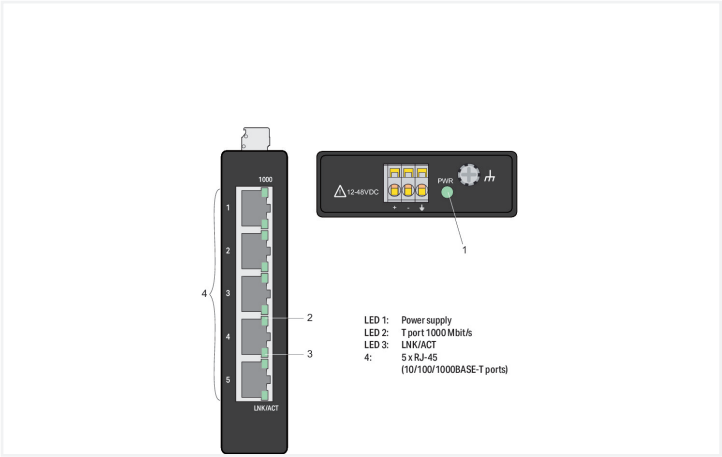

This unmanaged industrial ETHERNET switch (852-1111/000-001) has five ETHERNET ports for easily setting up small- to medium-sized networks. Its slim design paired with a DIN-rail adapter simplifies installation in the control cabinet and provides high vibration and shock resistance. Additionally, automatic transmission rate detection (auto-negotiation) and automatic identification of the transmit and receive lines (Auto MDI-X) allow simple plug-and-play operation, saving time and money during commissioning.

Features:

- 5 ETHERNET ports 10/100/1000 Mbit/s Autonegotiation
- Front-panel diagnostic LEDs
- Supports Auto-MDI/MDI-X functions
- Full/half-duplex transfer modes for each port
- Store-and-forward switching method
- Integrated address look-up table, supports 2000 absolute MAC addresses
- Overvoltage protection
- IEEE 802.3x flow control in full-duplex mode
- Prioritization of PROFINET® data packets (EtherType=0x8892) per IEEE802.1p
- DIN-35 rail mounting

Technical data	
Switching mode	Store-and-forward; non-blocking
Number of 1 Gb/s ports	5
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.1p Prioritization
MAC table (size)	2000 addresses
Jumbo frame size	9216 bytes
Supply voltage	12 ... 48 VDC; (±15 %); 24 ... 48 VDC (UL)
Power consumption (max.)	4 W
Current consumption (max.)	200 mA
Transmission rate	Copper cable: 10/1000 Mbit/s
Topology	Star
Indicators	Device: LED (PWR) green: Power supply; per port: LED (100, 1000) green: Status 100 Mbps, 1000 Mbps ports 1 ... 5



Connection data	
Connection technology: communication/fieldbus	Copper cable: 5 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-433/001-000; included female connector (MCS Connectors): 231-103/026-000

Physical data	
Width	23.4 mm / 0.921 inches
Height	109.2 mm / 4.299 inches
Depth	73.8 mm / 2.906 inches
Depth from upper-edge of DIN-rail	81 mm / 3.189 inches

Mechanical data	
Weight	203 g
Color	black
Housing material	Sheet steel
Conformity marking	CE

Environmental requirements	
Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
Fire load	0 MJ

Commercial data	
ETIM 9.0	EC000734
ETIM 8.0	EC000734
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	TW
GTIN	4066966254990
Customs tariff number	85176200000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates		
General approvals		General approvals
  		UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)
	UL 61010-2-201	E175199
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852



Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 852-1111/000-001



Documentation

Manual
Product Manual Indus- trial-ECO-Switch; V 1.0.0 25.10.2022 pdf 3170.65 KB



CAD/CAE-Data

CAD data
2D/3D Models 852-1111/000-001

