

Peltier Element



Features

- The Thermoelectric modules utilise the Peltier phenomenon principle to pump heat when voltage is applied
- When supplied with a suitable electric current, they can either cool or heat
- Suited for cooling miniature electronic components such as infra-red detector chips, microwave IC's, fibre-optic lasers and detectors
- Solid-state long term stability




Specification




Hot Side Temperature	25 °C	50 °C
Qmax	21.4 W	23.6 W
Delta T _{max}	67 °C	75 °C
I _{max}	2.5 A	2.5 A
V _{max}	15.4 V	16.4 V
Module Resistance	5.38 Ohm	6.07 Ohm

Tolerances for thermal and electrical parameters ± 10%

Performance Curves Th=25 °C

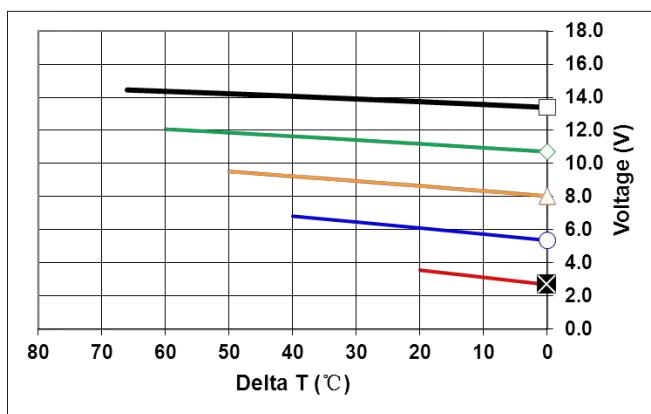


Performance Curves Th=50 °C

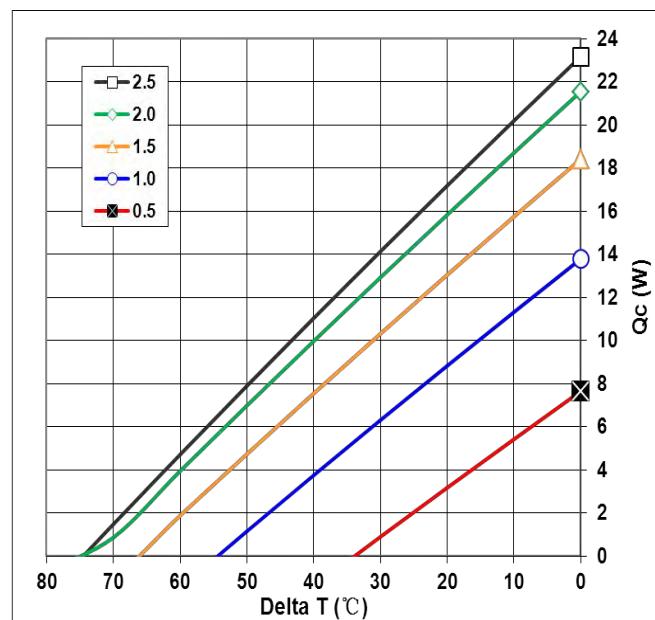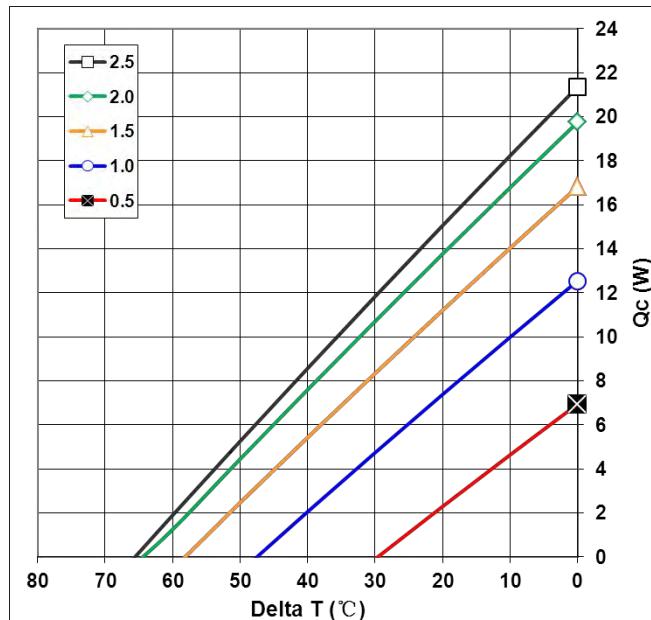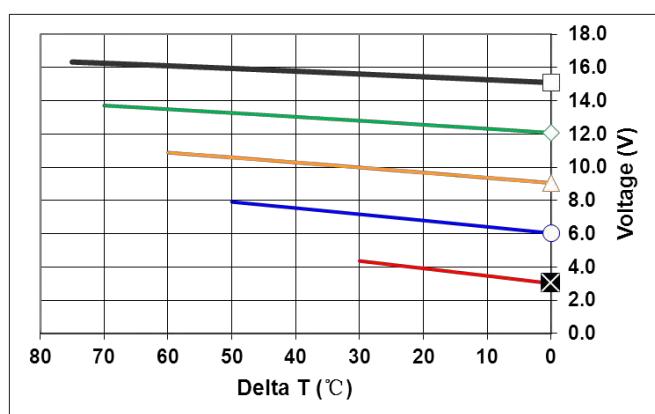

Peltier Element



Mechanical Drawing

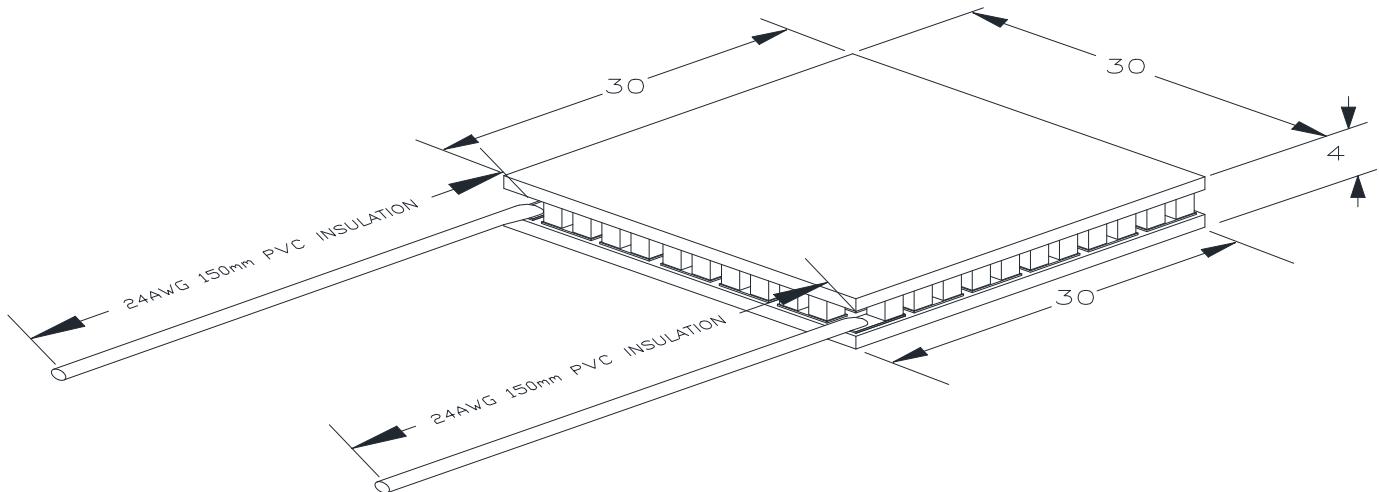

Operation Tips

- Max Operating Temperature: 90°C
- Do not exceed Imax or Vmax when operating module
- Please consult RND for moisture and corrosion protection options

Art Nr.

RND 460-00149