


IO-Link makes communication down to the sensor level visible



Digitalize manufacturing sites to realize Onsite IoT

The manufacturing industry is under pressure to meet the demands of flexible production and advanced manufacturing. Manufacturers are now approaching future manufacturing innovation by easily and reliably collecting a wide range of data from the production floor and leveraging digital technologies, such as ICT and analysis technology. 'Onsite IoT' uses production floor data to help minimize machine downtime and backtracking and increase machine operation stability and productivity. Offering a wide variety of components including sensors and controllers and further expanding the IoT product lineup to collect onsite data, OMRON can totally help you bring IoT innovation to your manufacturing sites.

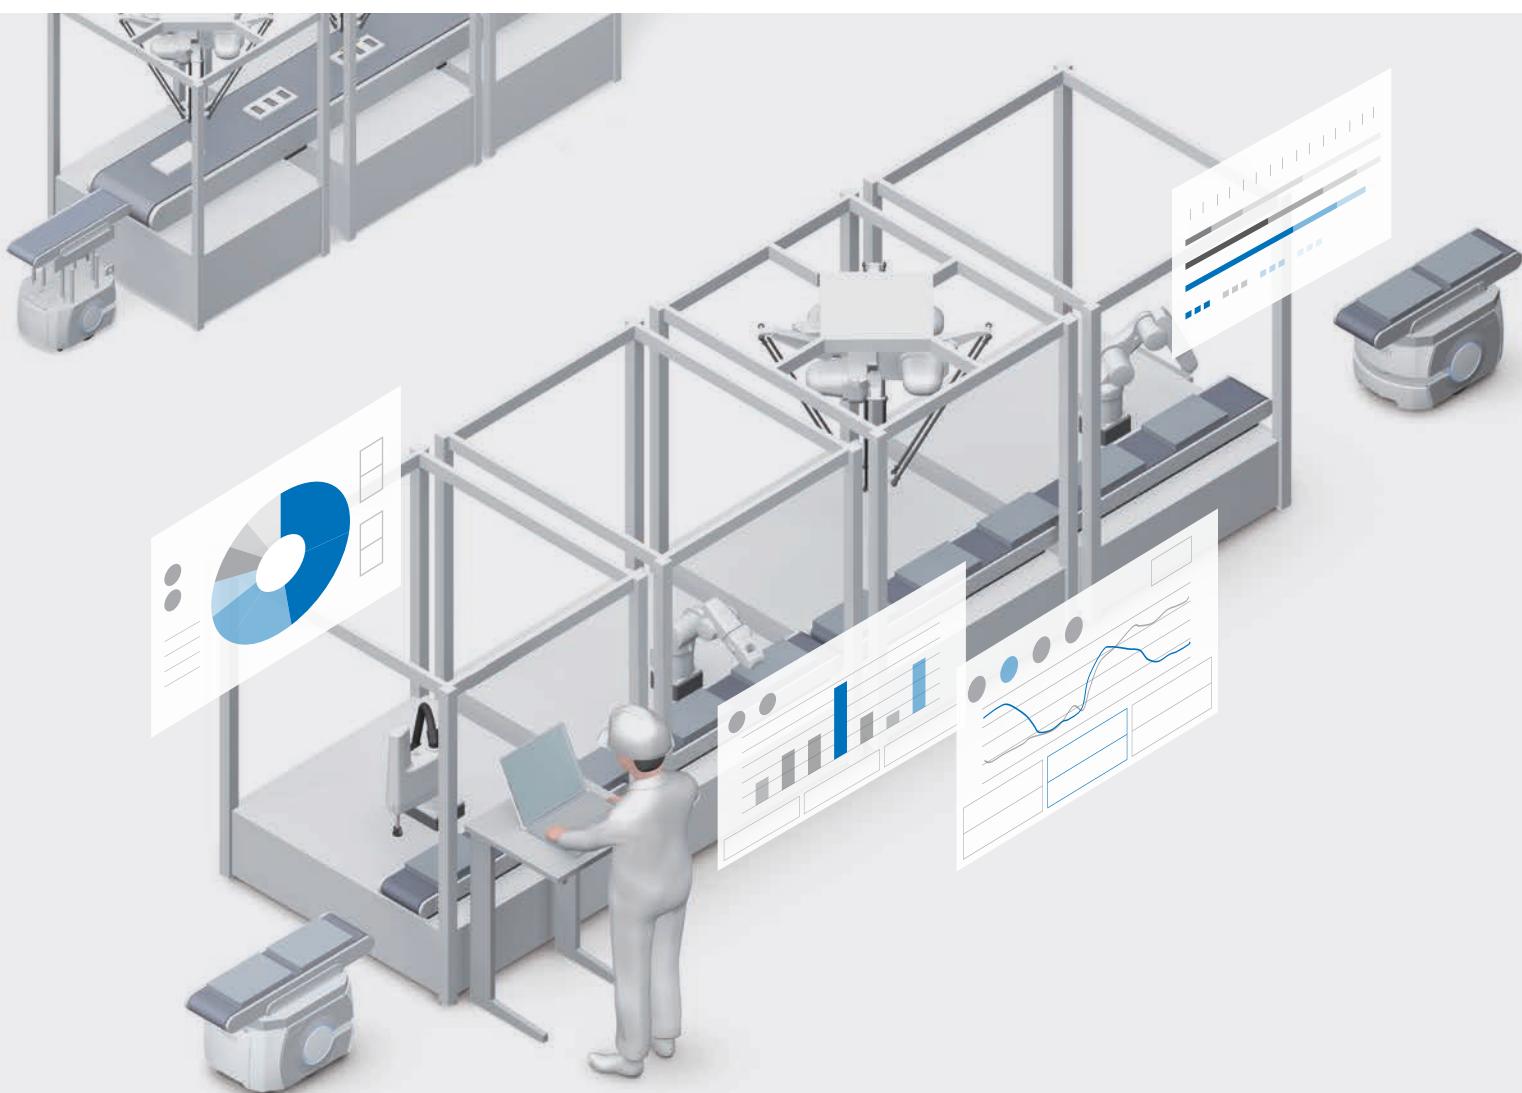

Onsite IoT brings innovation to manufacturing

Real-time onsite data collection, analysis, and utilization

The controller collects data from the manufacturing site (e.g., status monitoring data, production data, and inspection data) in real time while controlling devices. Collected data is accumulated, analyzed, and utilized for various applications such as predictive monitoring of machines, manufacturing traceability, predictive maintenance, and quality improvement.

Onsite data is stored in database connected directly to controller in real time



Data is collected from devices on standard network in real time



Data analysis results are used for control

↔
Data is collected from devices

 **IO-Link**





Digitalize your machine with IO-Link

Replace I/O units with IO-Link masters and install IO-Link sensors and actuators to introduce IO-Link into your production system. In order to bring IoT to a factory, data is collected from various components installed on the production floor via standard networks including IO-Link.

Easy way to adopt IoT at manufacturing sites

Use IO-Link at area level to manage data for important processes.

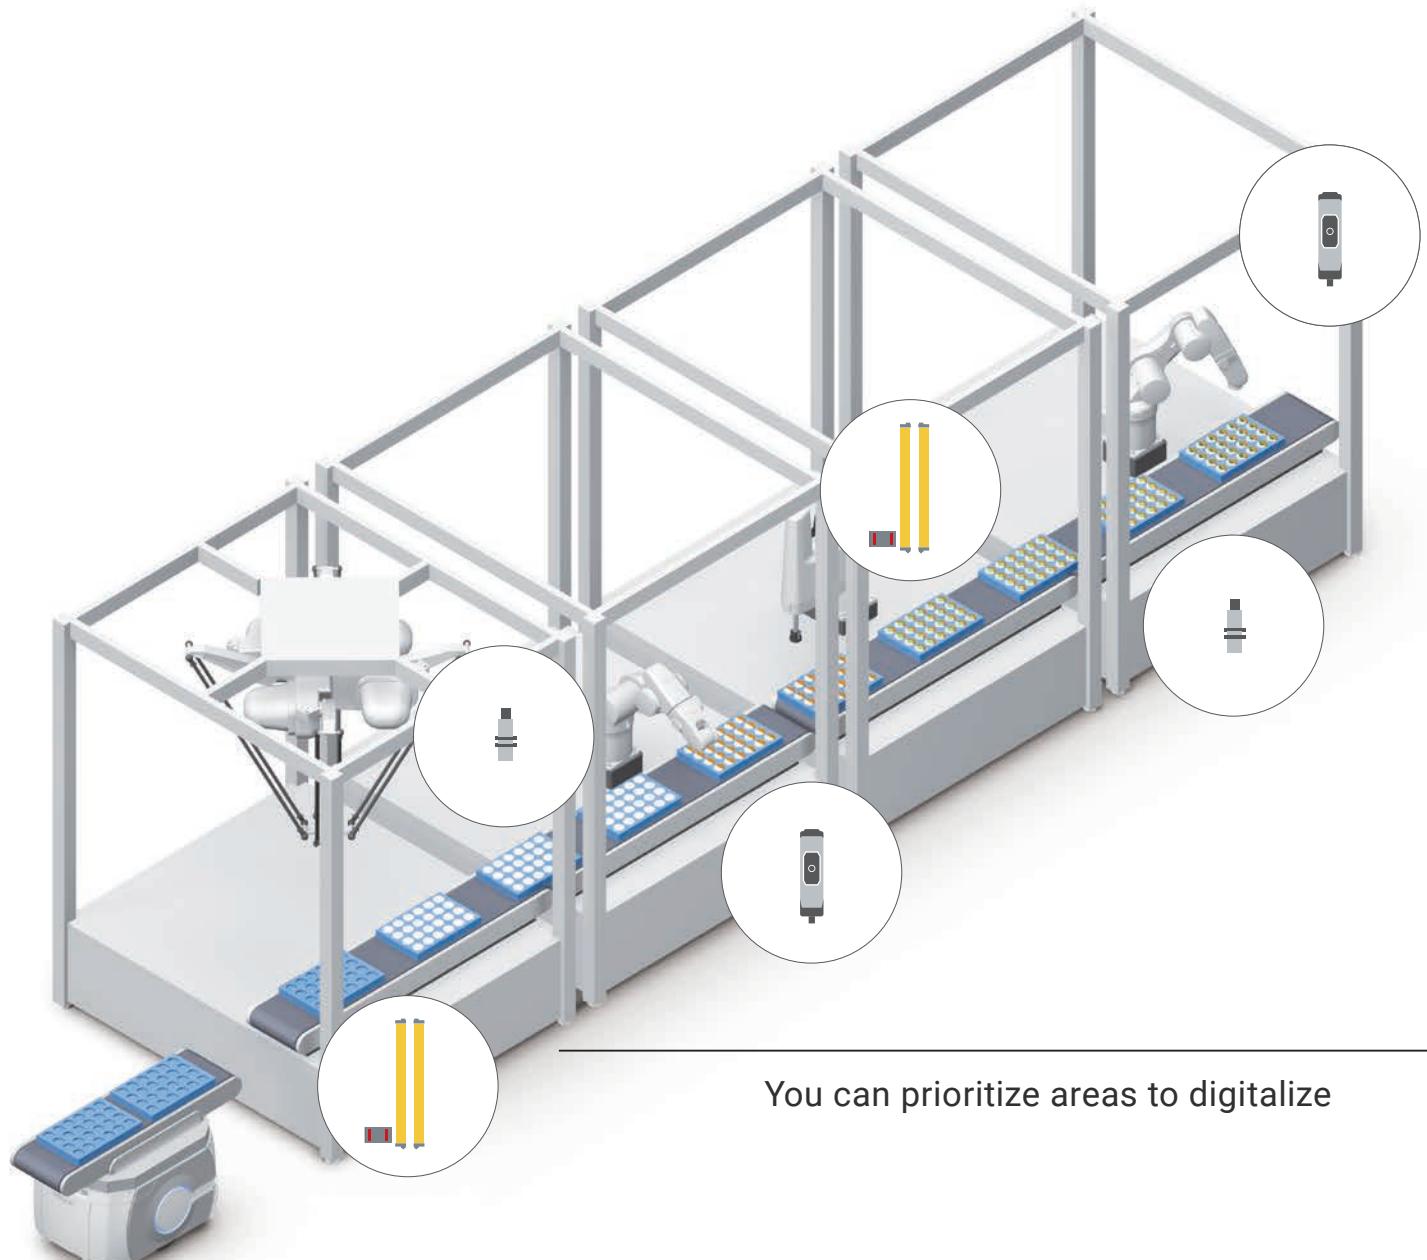

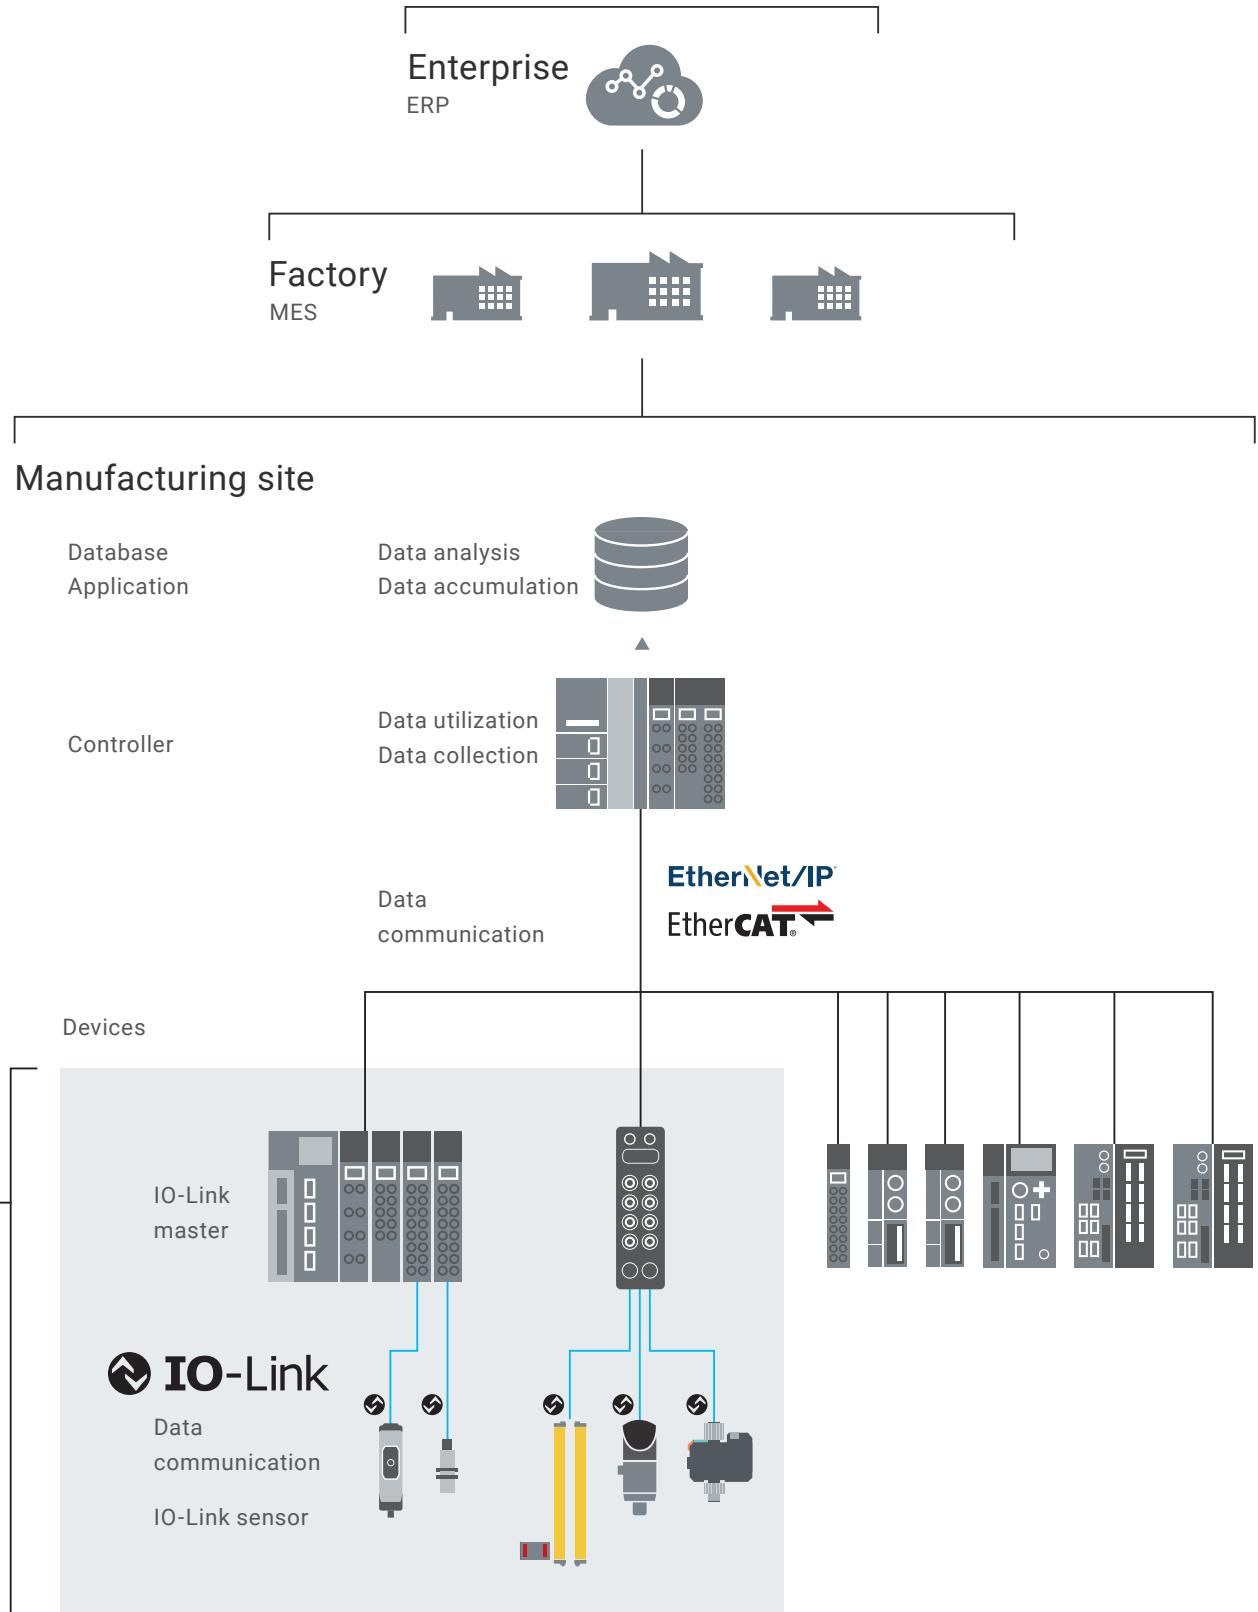


OMRON makes it easy to introduce IO-Link components

OMRON's wide range of IoT products, from sensors to controllers, allows flexible system configuration and easy IoT system design, commissioning, and maintenance. As a PLC manufacturer, OMRON also offers various IO-Link masters and components with useful features, facilitating introduction of an IO-Link system.

Flexible system configuration

You can connect IO-Link sensors and actuators in many different ways to suit your application.

The IO-Link master can also be connected to standard sensors. This means you can use IO-Link sensors in your existing system.

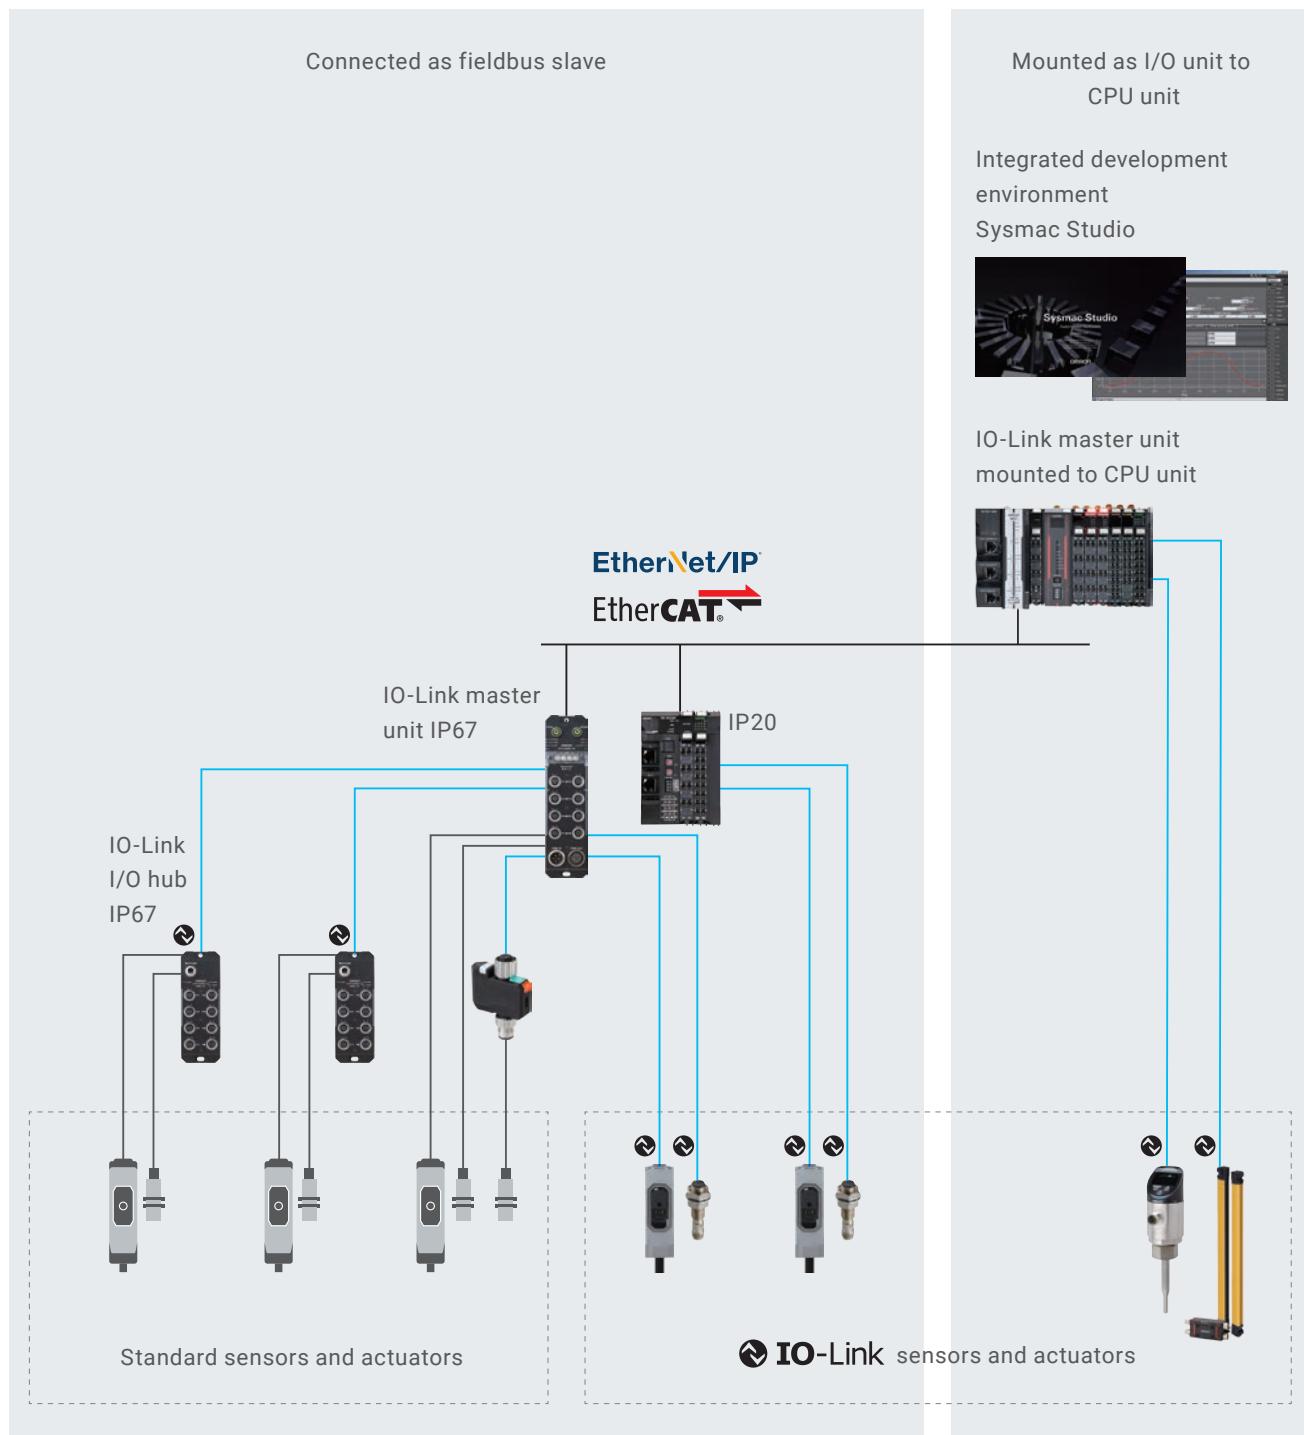


Speed up design, commissioning, and maintenance

The intuitive operation simplifies configuration and programming, and the configuration software (integrated development environment Sysmac Studio) provides many useful functions. This reduces setup and commissioning time of IO-Link systems.

Reduce configuration time with automatic parameter setting and automatic device variable generation

Just select and place a device on the Sysmac Studio to automatically set all parameters at once and automatically generate device variables on the I/O map. It is possible to reduce configuration time and minimize configuration mistakes.

Select and place an IO-Link device just by dragging and dropping it on the Sysmac Studio

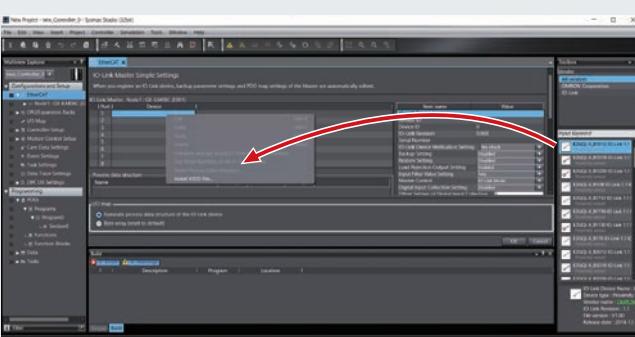

No need to enter related setting parameters
Automatic update


No need to program
Automatic generation of device variables according to process data



Minimize commissioning and replacement time


Setting all devices from the controller significantly reduces setup time.

Other vendor Data transfer to each device using special software

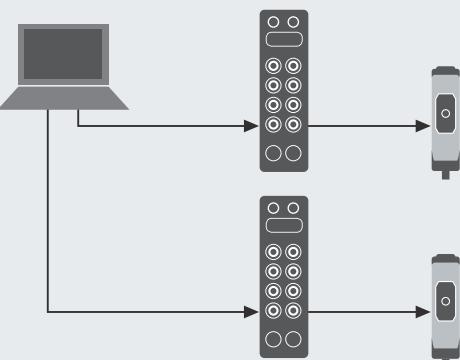

Configuring each device one by one using special software requires time and effort.

OMRON Data transfer to all devices at once from the controller

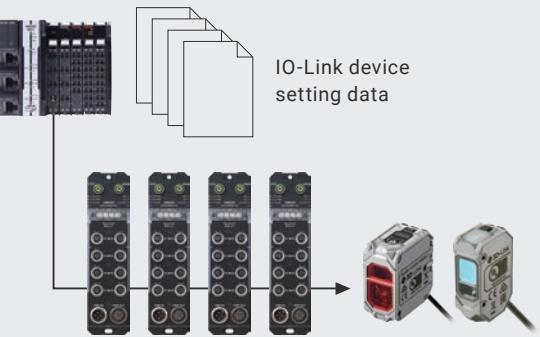

IO-Link device setting data


Configuring all devices at once from the controller eliminates the need to configure each device individually, greatly cutting down setup time and effort.

IO-Link: a communication technology reaching the sensors level

IO-Link, specified as international standard IEC 61131-9, is an open information technology (interface technology) between the sensor or actuator and the I/O terminal. It collects information from the sensor or actuator, which allows you to accurately monitor the status of the manufacturing site. IO-Link enables communication within the whole system and reduces time required for commissioning and maintenance.

An open international standard


As of August 2025, over 500 companies, including major sensor manufacturers, have joined the IO-Link Consortium. A system can be built with devices from OMRON and other vendors. For the latest information, visit <https://io-link.com/en/>

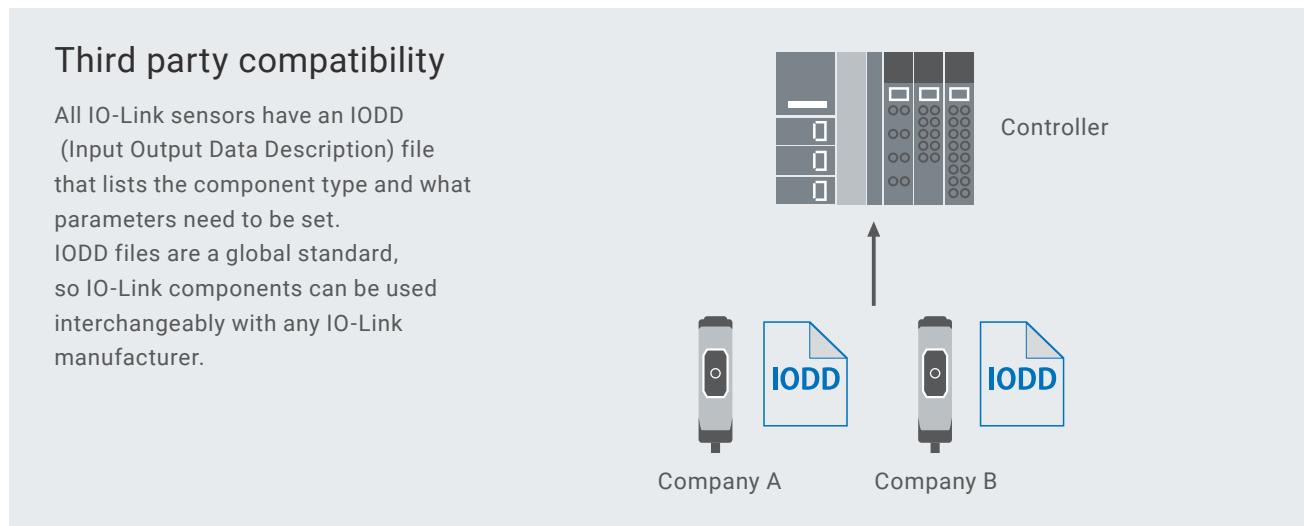

Information beyond ON and OFF


IO-Link sends and receives not only ON/OFF signals, but also sensor information.

Three baud rates (COM1: 4.8 kbps, COM2: 38.4 kbps, COM3: 230.4 kbps) are possible in IO-Link specifications. OMRON's IO-Link components are compatible with COM2 and COM3, and are capable of high speed communications.

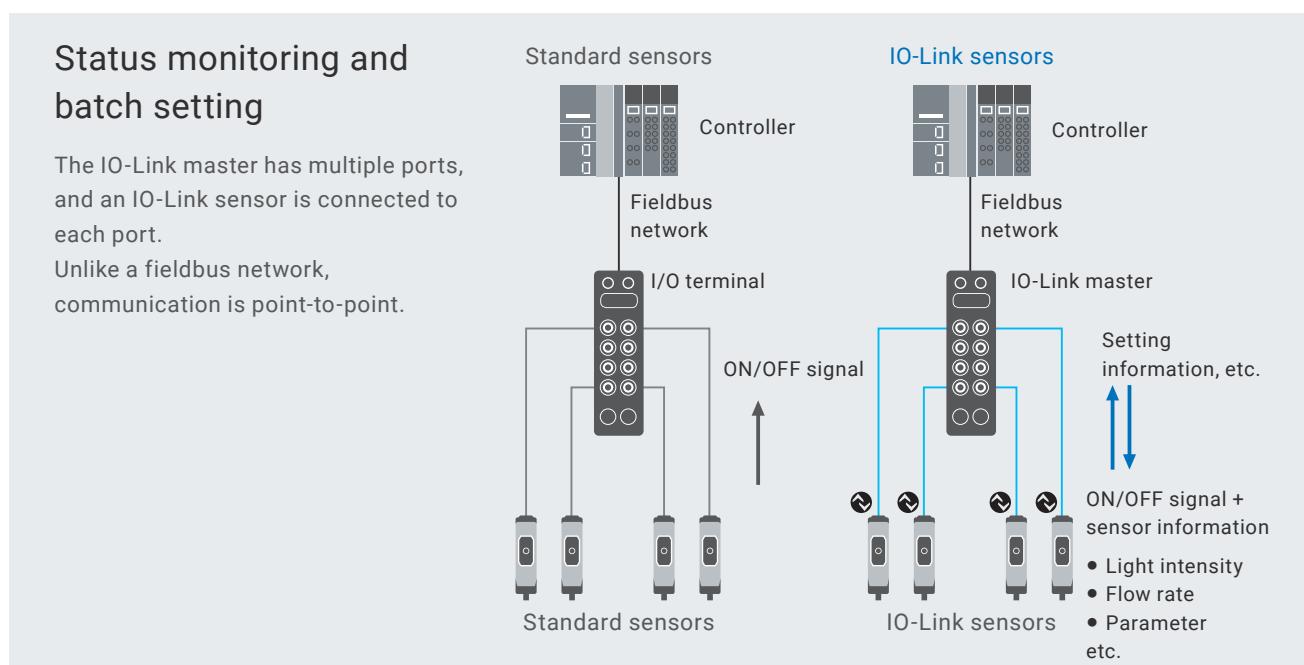


Simple wiring with standard cables and connectors

No special communication cables are needed. The same pin is used for both standard input/output and IO-Link communication. Standardized M5, M8, and M12 connectors are used.

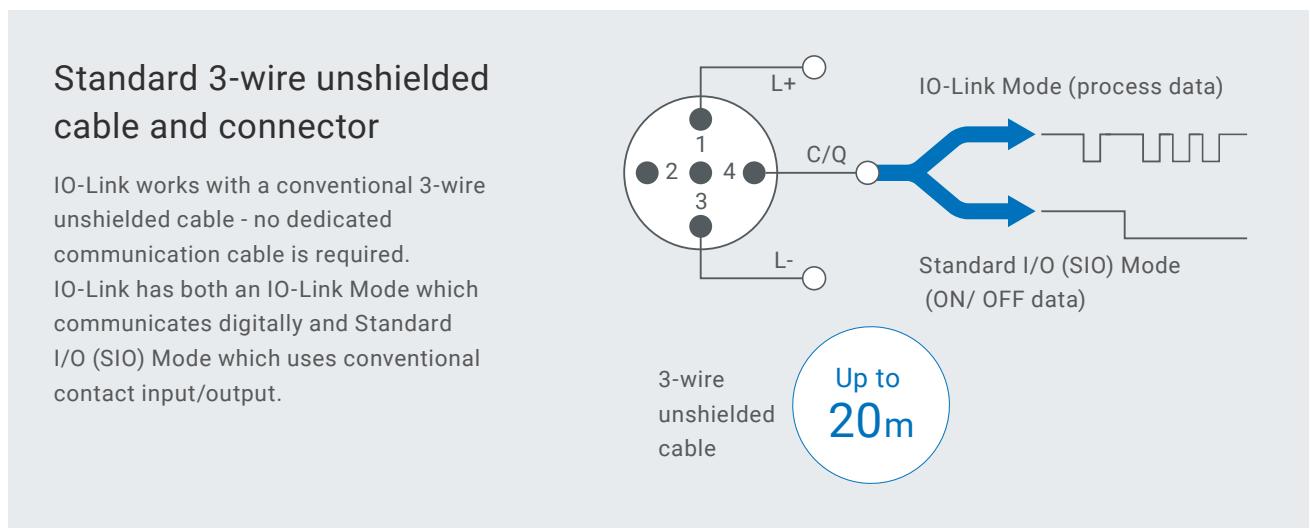


Mix of IO-Link and standard sensors

You can have standard and IO-Link sensors and actuators on the same IO-Link master.

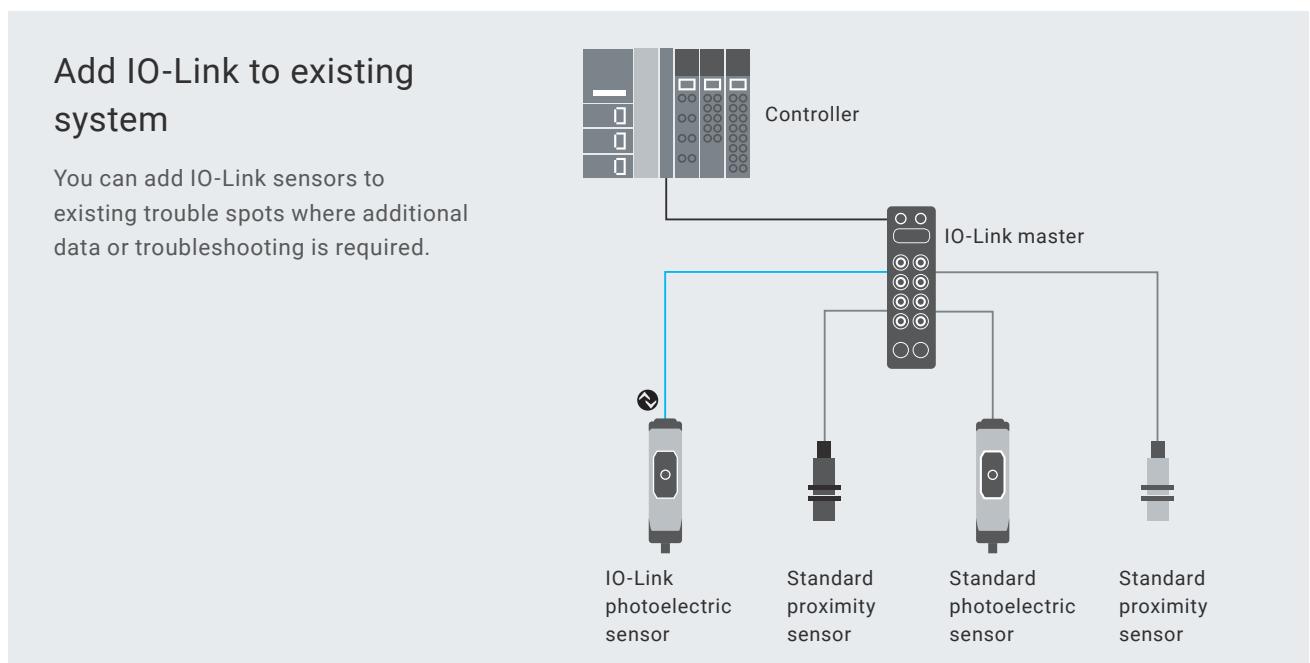

Maximize machine uptime by minimizing Availability Loss and Quality Loss

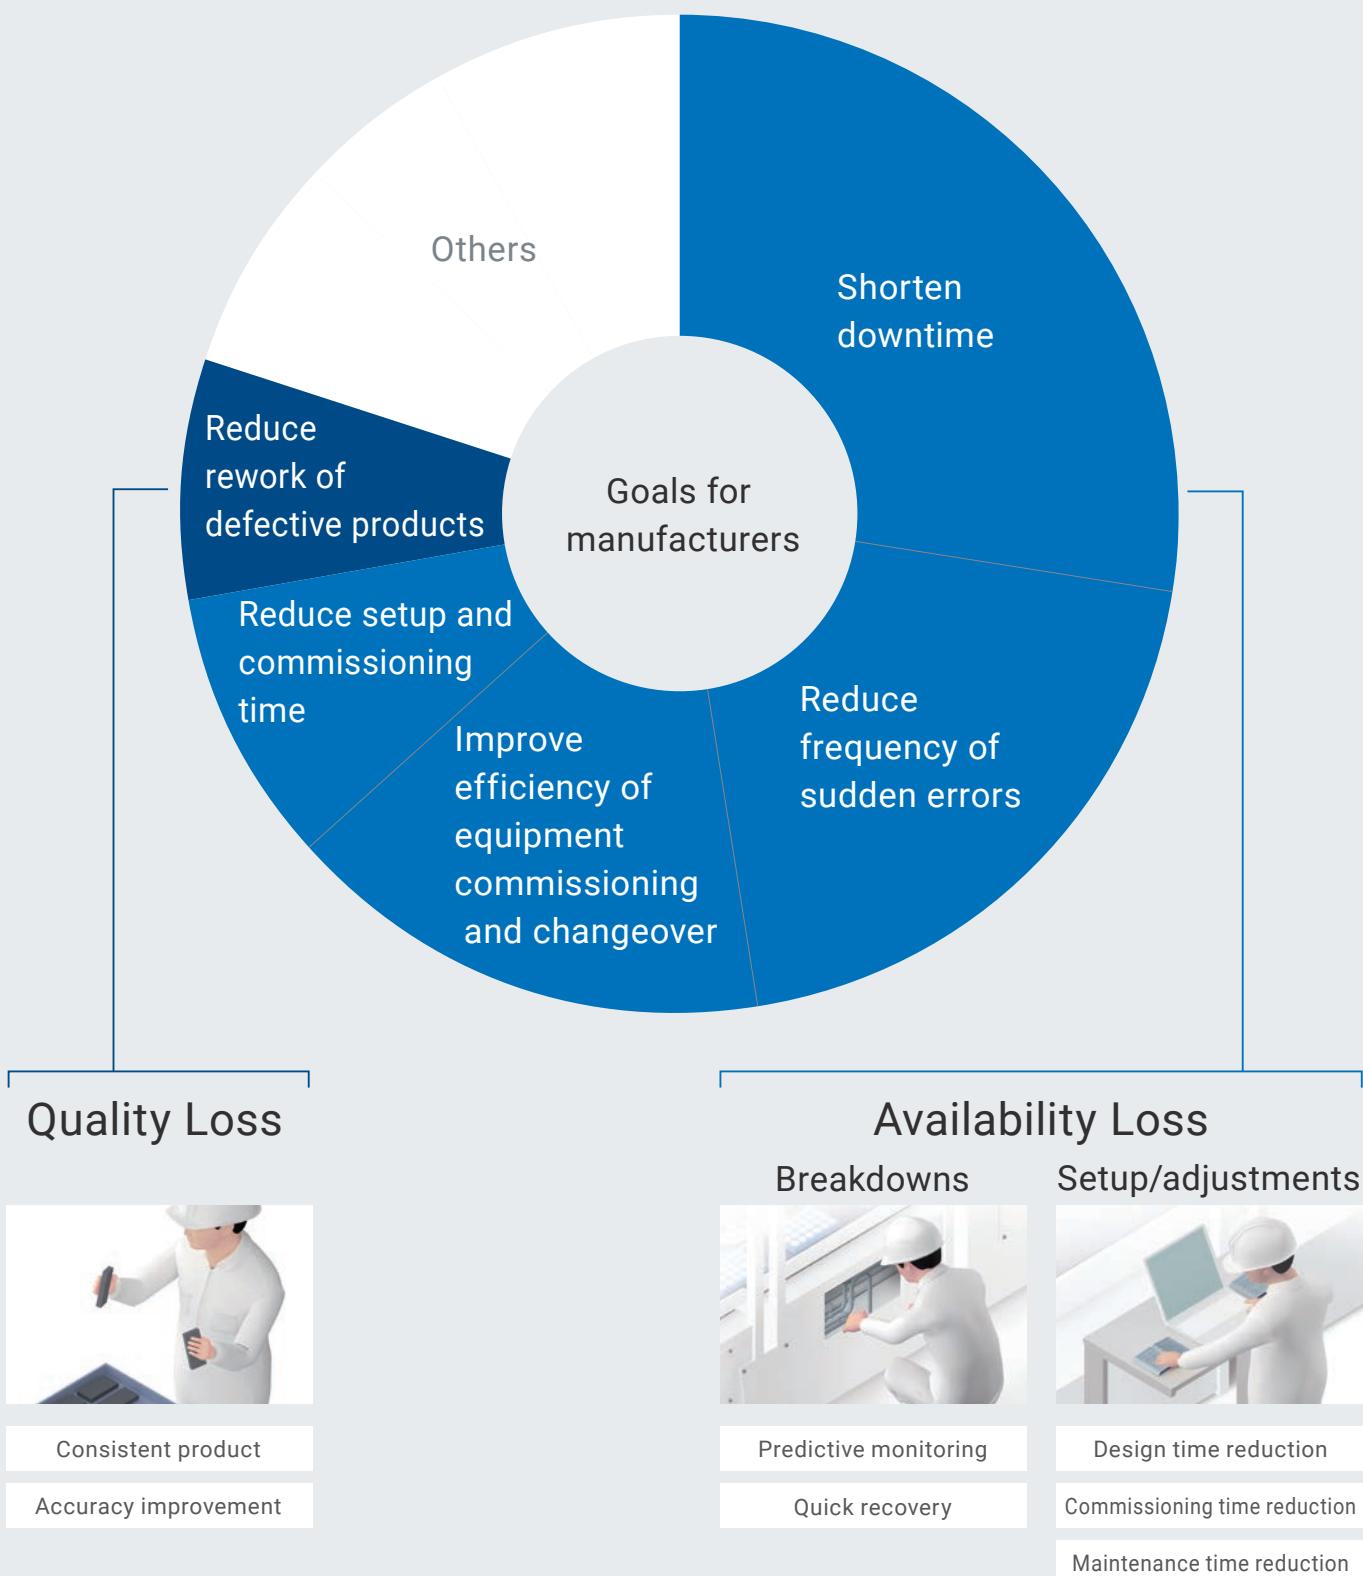

* Based on OMRON's analysis results.

OMRON's IO-Link Predicts, Improves, and Simplifies to address manufacturing issues

Predict

Condition monitoring and fault detection avoid breakdowns

Condition monitoring of machines reduces unplanned machine stops. Real-time data collection from sensors helps minimize downtime.

Improve

Improved accuracy reduces Quality Loss

Signs of failure can be identified, preventing defective products from being produced. High-accuracy control further increases production quality.

Simplify



Simple operation speeds up setup

OMRON's IO-Link system including IO-Link masters, sensors, and software facilitates design and commissioning, which helps accelerate improvement across the manufacturing site.



Applications for various steps

Smart production lines using IO-Link improve all steps, from design and commissioning through to operation and maintenance, increasing operating efficiency and quality.

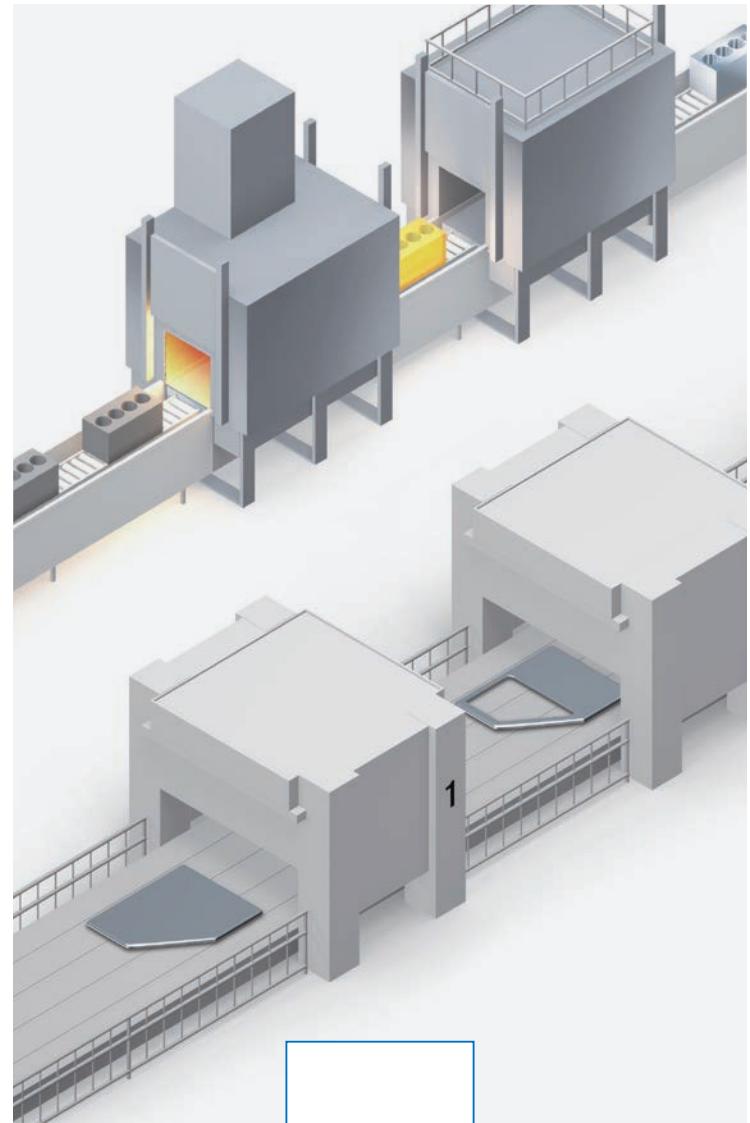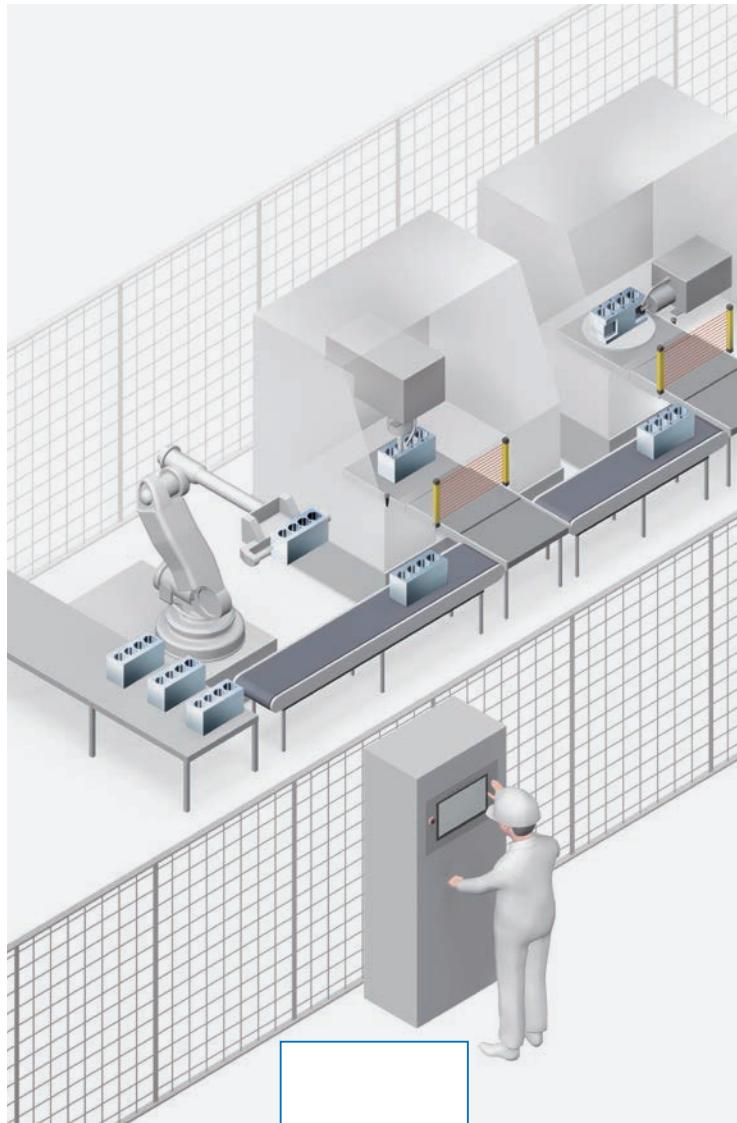

Predictive monitoring and quick recovery boost uptime

► Page 14

Visualization of various data improves manufacturing quality


► Page 16



Simplify

Reduce design time

► Page 18

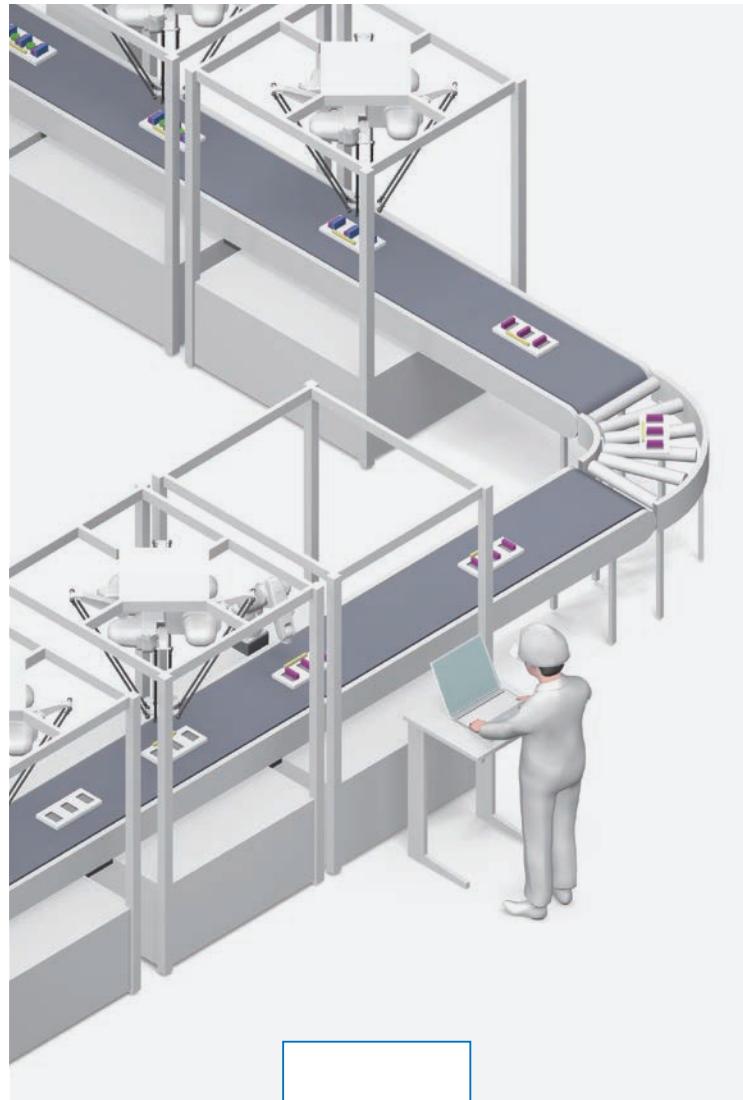


Simplify

Reduce commissioning and maintenance time

► Page 20


Predictive monitoring and quick recovery boost uptime

Machine condition monitoring using data collected from various devices allows you to take proactive actions, reducing unplanned stops. When an error is detected, detailed information is provided promptly. This helps minimize downtime.

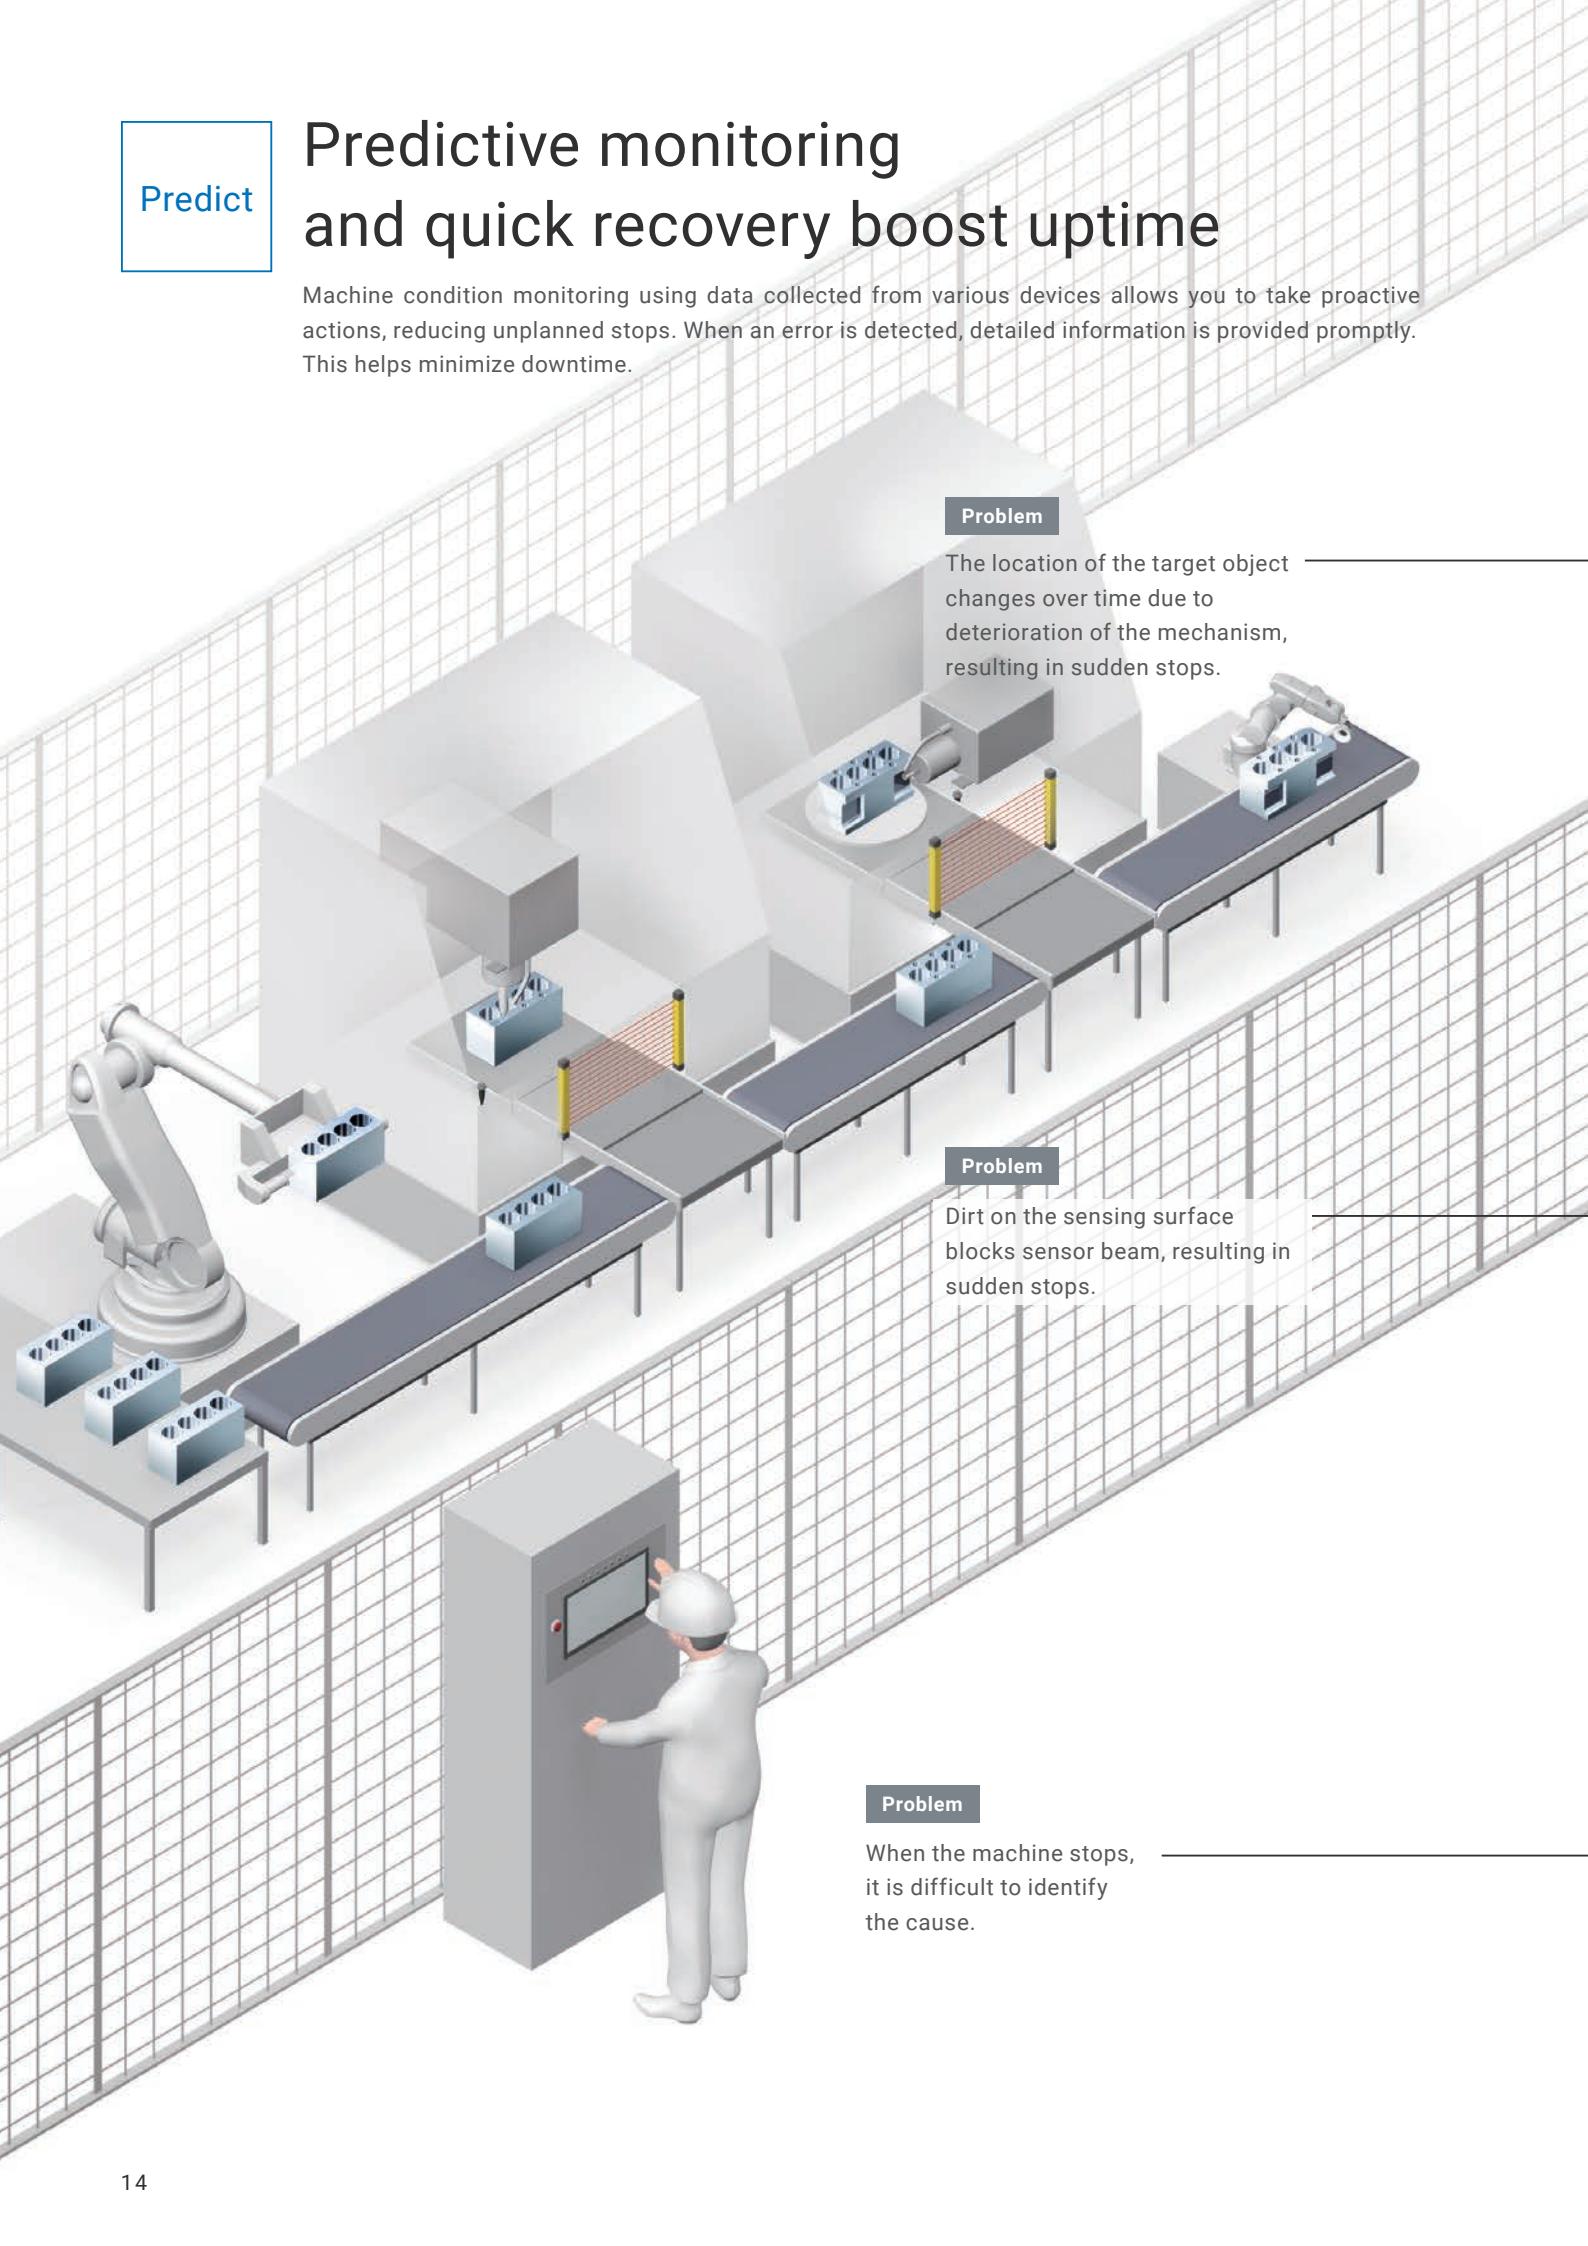

Provides early warning if the target distance is changing, preventing a problem from occurring

Solve a problem before the machine stops.

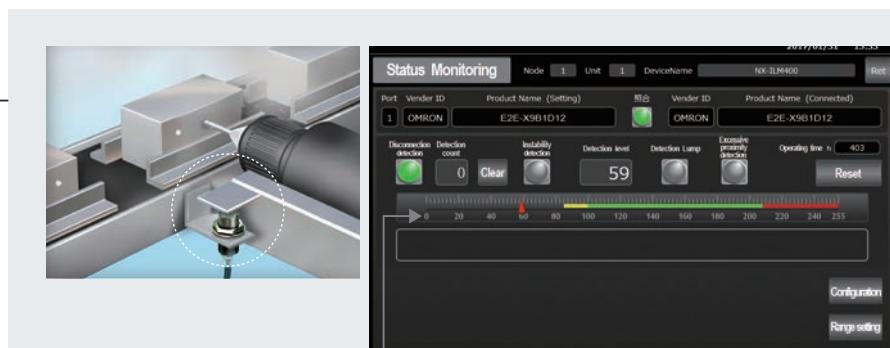

The image shows a proximity sensor mounted on a machine component. Below it is a screenshot of a 'Status Monitoring' software interface. The interface displays a 'Detection Level' slider set to 59, with a scale from 0 to 255. Other settings include 'Detection count' (0), 'Instability detection' (disabled), and 'Operating time (h)' (403). The software also shows port information (Port: 1, Vendor ID: OMRON, Product Name: E2E-X981D12) and connected device information (Port: 1, Vendor ID: OMRON, Product Name: E2E-X981D12).

Detection Level


Constantly monitoring the position of the target object and reporting excessive remoteness or proximity are useful for predictive maintenance.



Proximity sensor

Provides early warning if the light intensity drops, preventing false detection

Solve a problem before the machine stops.

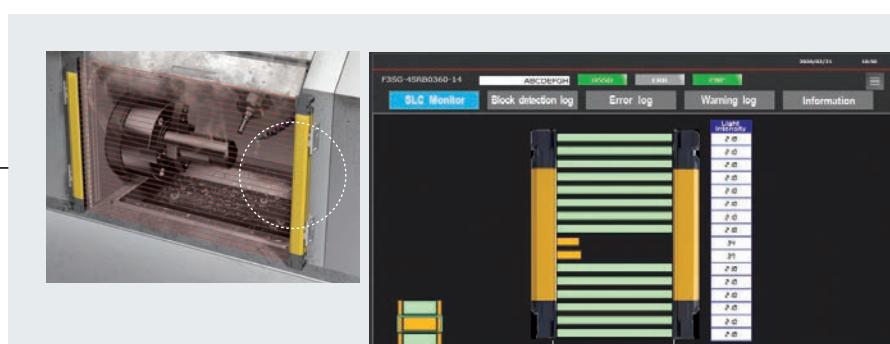

The image shows a machine with a light curtain sensor. Below it is a screenshot of a 'SLC Monitor' software interface. The interface displays a 'Light Intensity' graph with multiple horizontal bars representing different light levels. The graph shows a significant drop in light intensity for one of the bars, indicating a fault. The software also includes tabs for 'Block detection log', 'Error log', 'Warning log', and 'Information'.

Incident Light Level


Light intensity drop due to dirt accumulated on the light curtain is reported. You can do predictive maintenance by taking action before false detection occurs.



Light curtain, photoelectric sensor

Reports fault location and condition, minimizing downtime

Quickly restore the machine even if it stops.

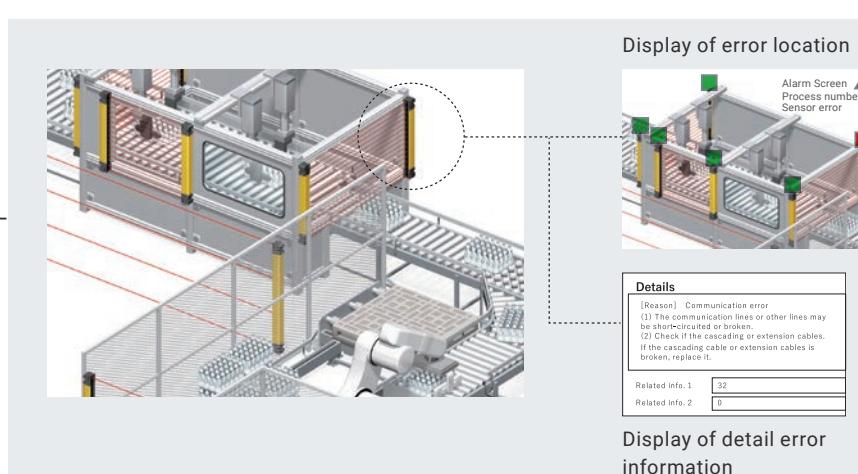

The image shows a complex machine setup with multiple sensors. A screenshot of a software interface shows a 'Display of error location' for 'Process number 1 Sensor error'. The interface includes a 'Details' section with a 'Reason' (Communication error) and two troubleshooting steps. It also shows 'Related info. 1' (32) and 'Related info. 2' (0).

Display of error location

Display of detail error information


When a fault occurs, IO-Link allows you to see which sensor faulted and the possible cause of the error. With this information, you can determine the required action and quickly bring the equipment back online.



Light curtain, photoelectric sensor, proximity sensor, flow sensor

Visualization of various data improves manufacturing quality

A variety of quality-related data can be visualized. Signs of failure can be identified to take proactive action before failure affects quality, reducing Quality Loss.


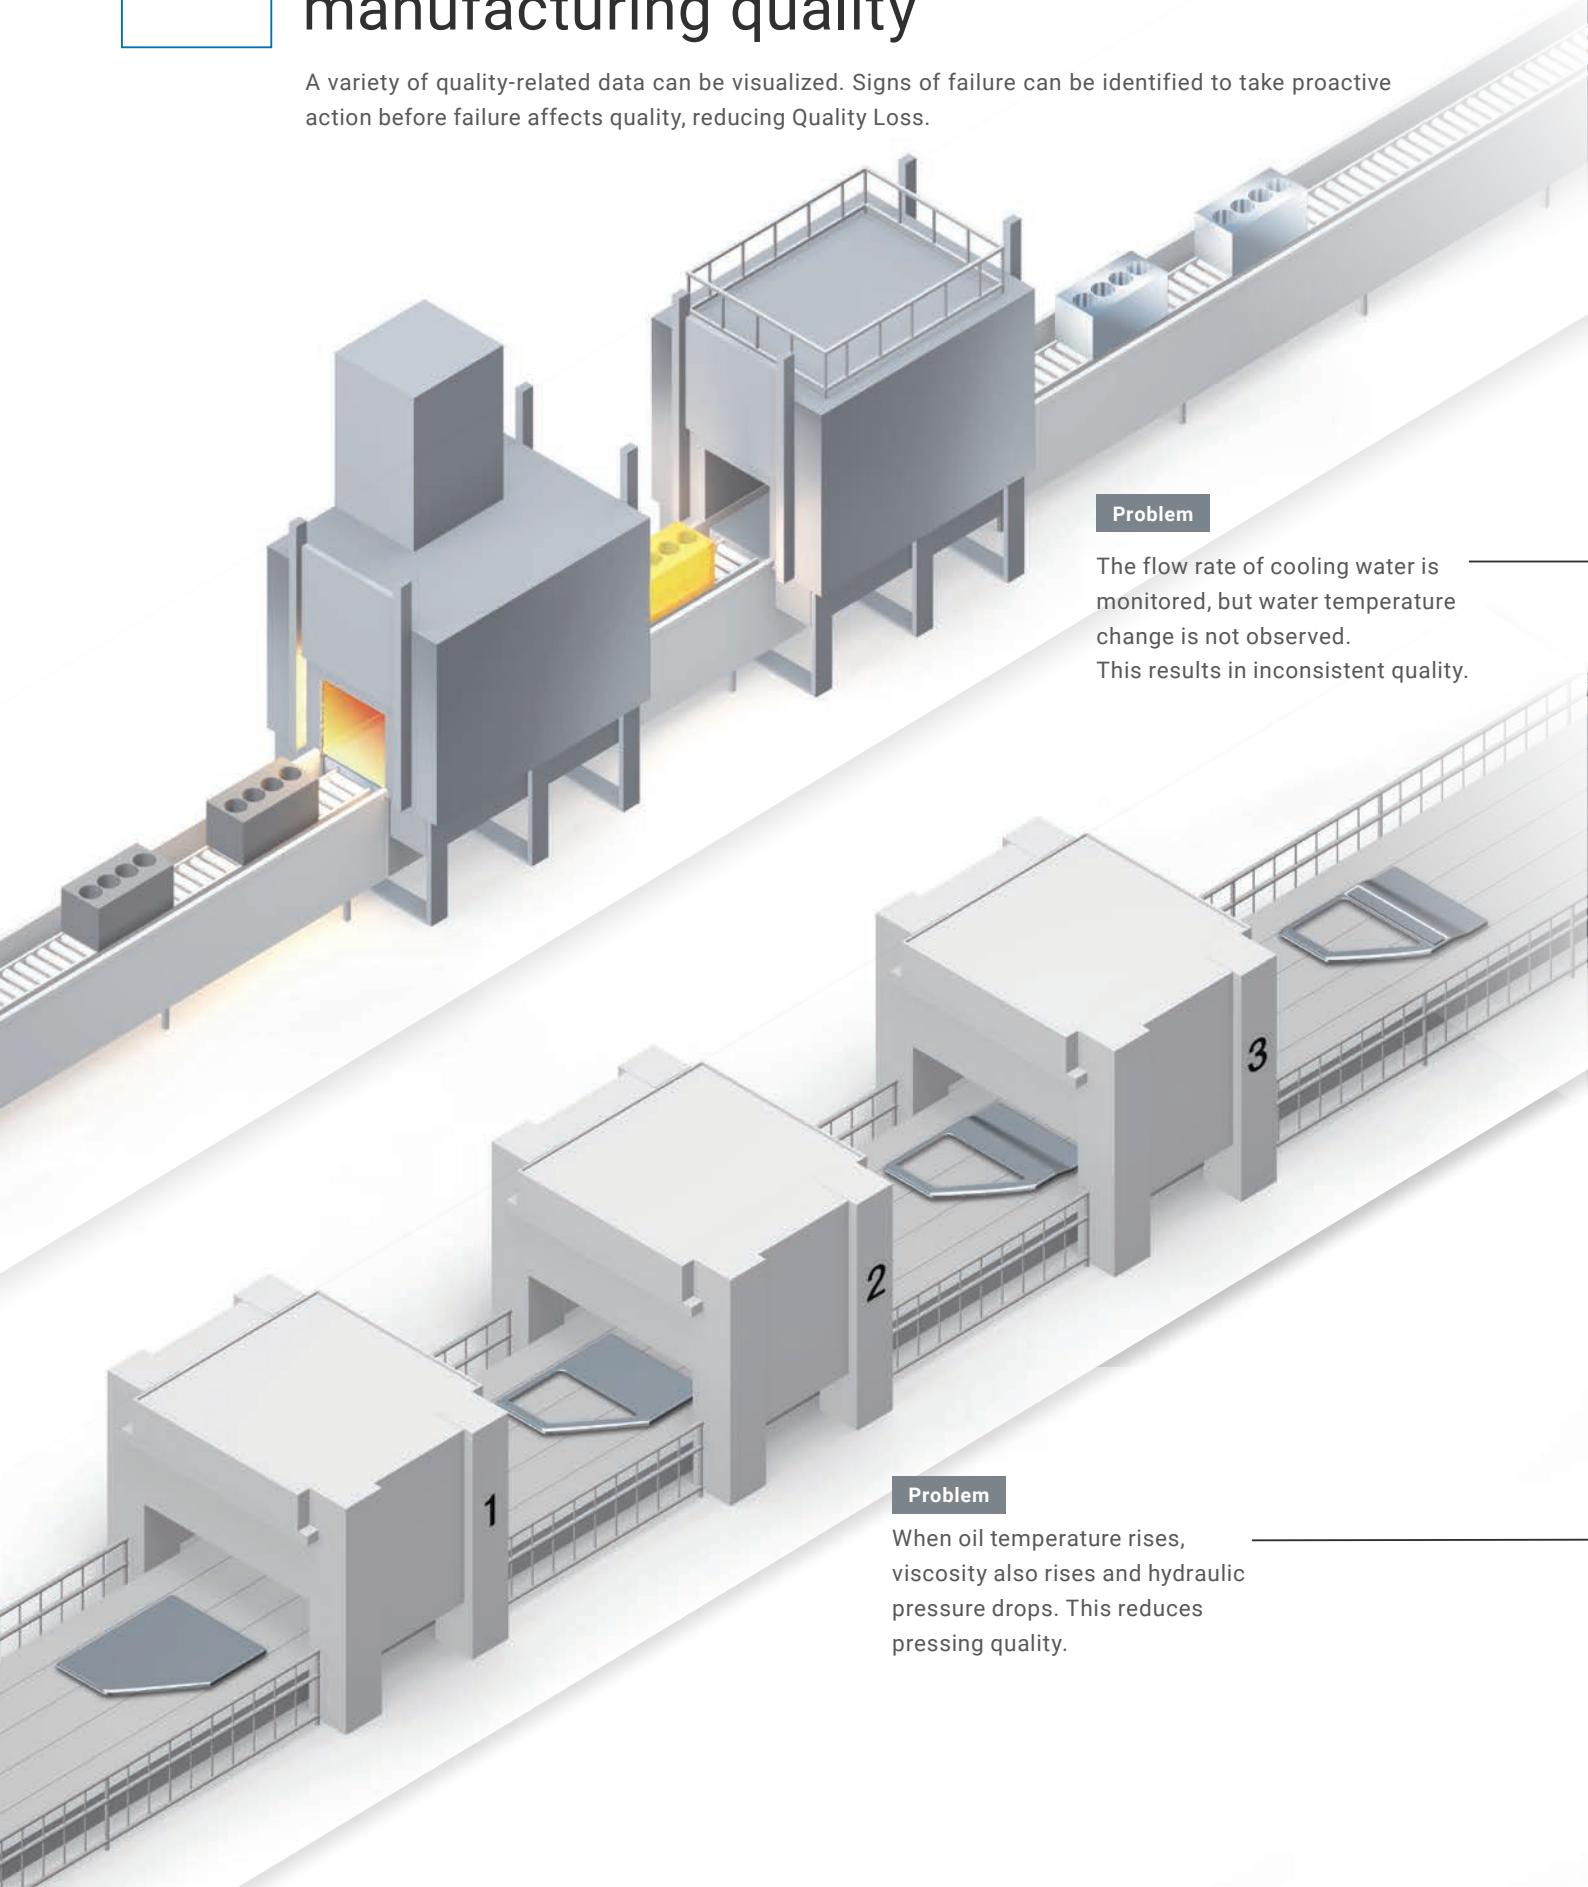


Monitors multiple sets of process data to ensure strength of parts

Increase accuracy by monitoring multiple sets of data.

[Example of carburizing furnace]

The flow rate and temperature of cooling water are monitored to maintain cooling quality.

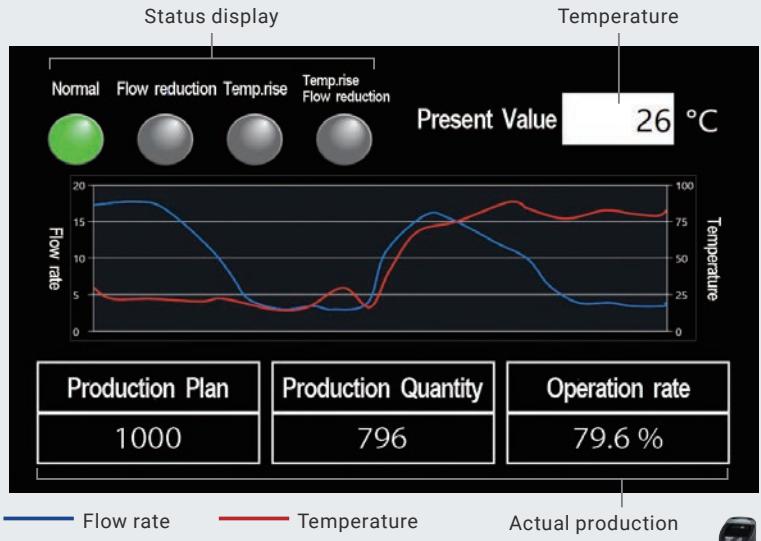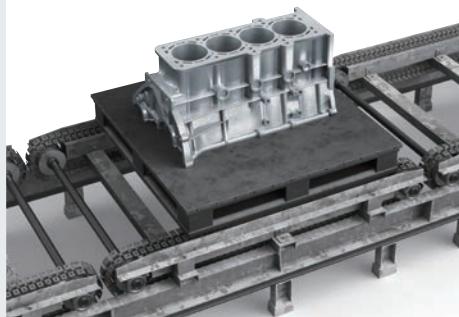


Simultaneously monitoring the flow rate and temperature of cooling water enables cooling to be maintained and controlled. This ensures a consistent finish and raises the standard of parts strength.

Monitors multiple sets of process data to allow adjustment of processing conditions before a defect occurs

Maintain quality by monitoring multiple sets of data.

[Example of pressing machine]

The pressure and temperature of oil are monitored to maintain pressing quality.

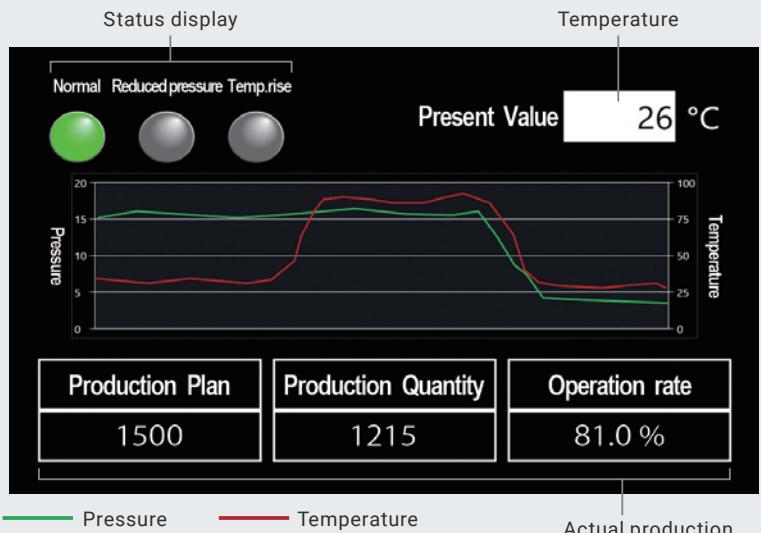

Simultaneously monitoring the pressure and temperature of oil enables pressing conditions to be maintained and controlled. This ensures a consistent finish and raises the standard of pressing quality.




Reduce design time

Save setup time through intuitive operation without reading manuals and through automatic generation of variables.



Problem

Engineers have to make many settings while reading manuals.

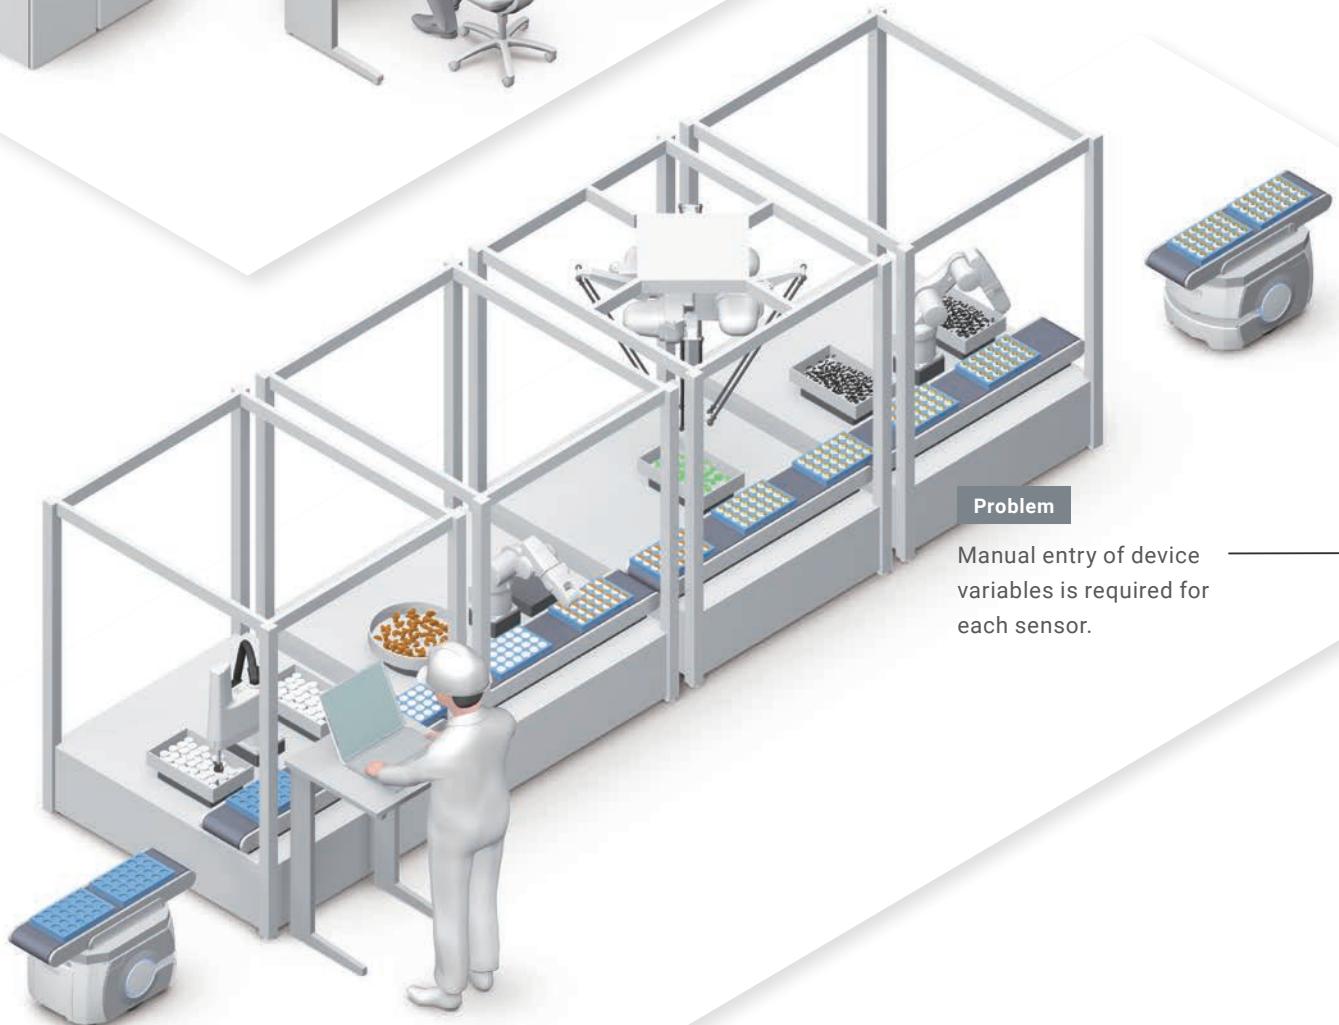

Problem

Manual entry of device variables is required for each sensor.


Problem

IO-Link has to be configured manually after wiring.

Just drag and drop devices to configure all necessary devices at once^{*1}

Set parameters with simple operation.

Patented

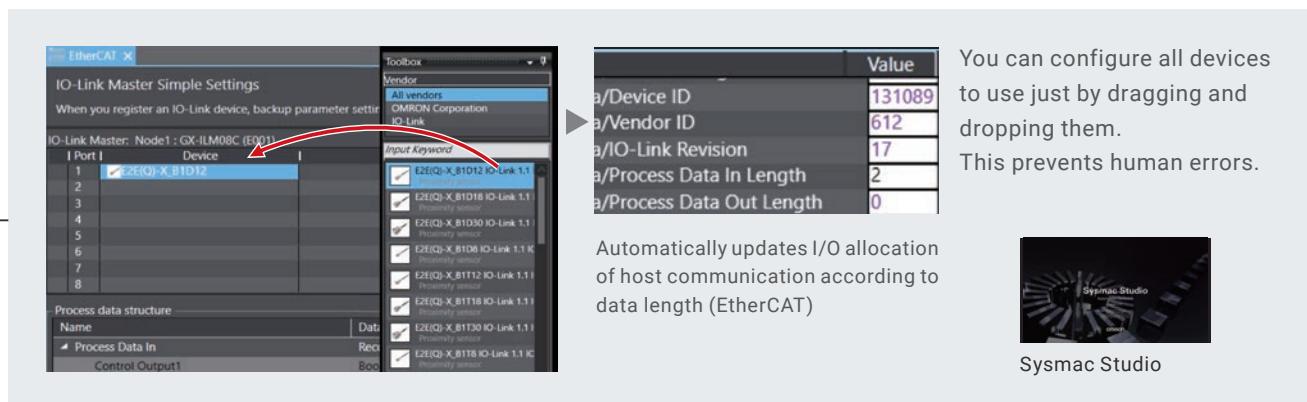

You can configure all devices to use just by dragging and dropping them. This prevents human errors.


Automatically updates I/O allocation of host communication according to data length (EtherCAT)

Sysmac Studio

Use required data easily^{*1}

Configure IO-Link devices without time-consuming programming.

Patent pending

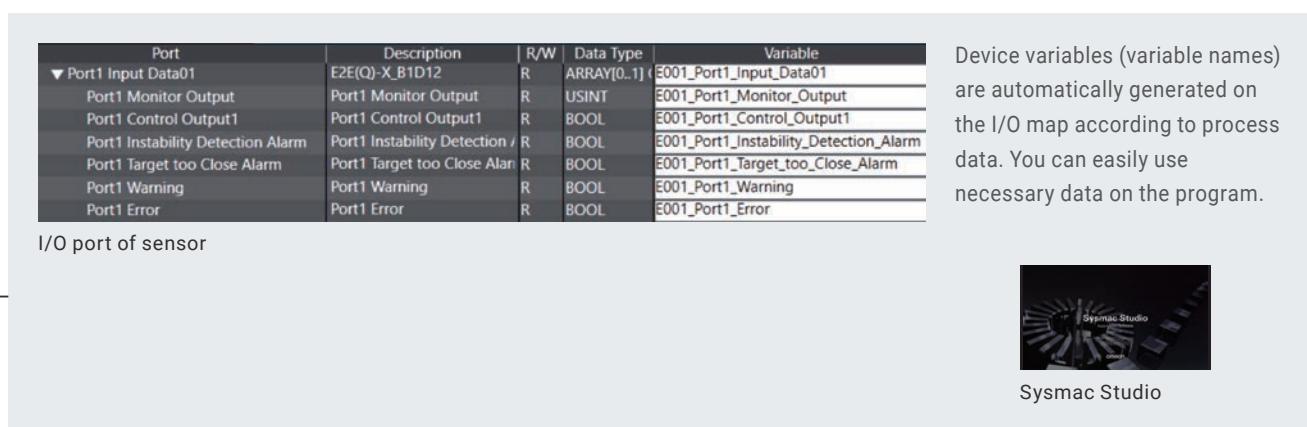


I/O port of sensor

Device variables (variable names) are automatically generated on the I/O map according to process data. You can easily use necessary data on the program.

Sysmac Studio

Easily reuse settings by copying and pasting

Make configuration simple and fast.

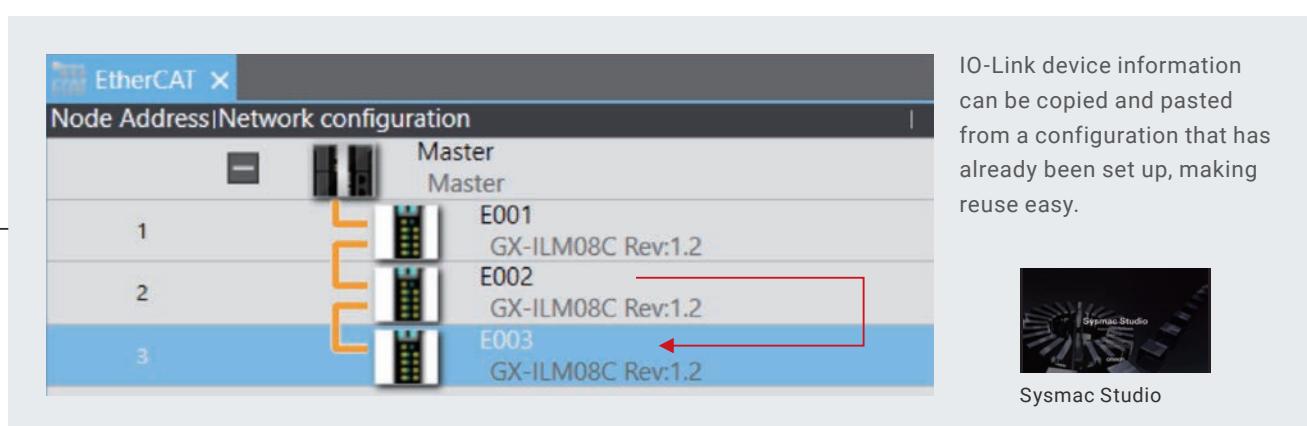

IO-Link device information can be copied and pasted from a configuration that has already been set up, making reuse easy.



Sysmac Studio

*1. Available via EtherCAT.

Simplify


Reduce commissioning and maintenance time

Save setup time through intuitive operation without reading manuals and through automatic generation of variables.

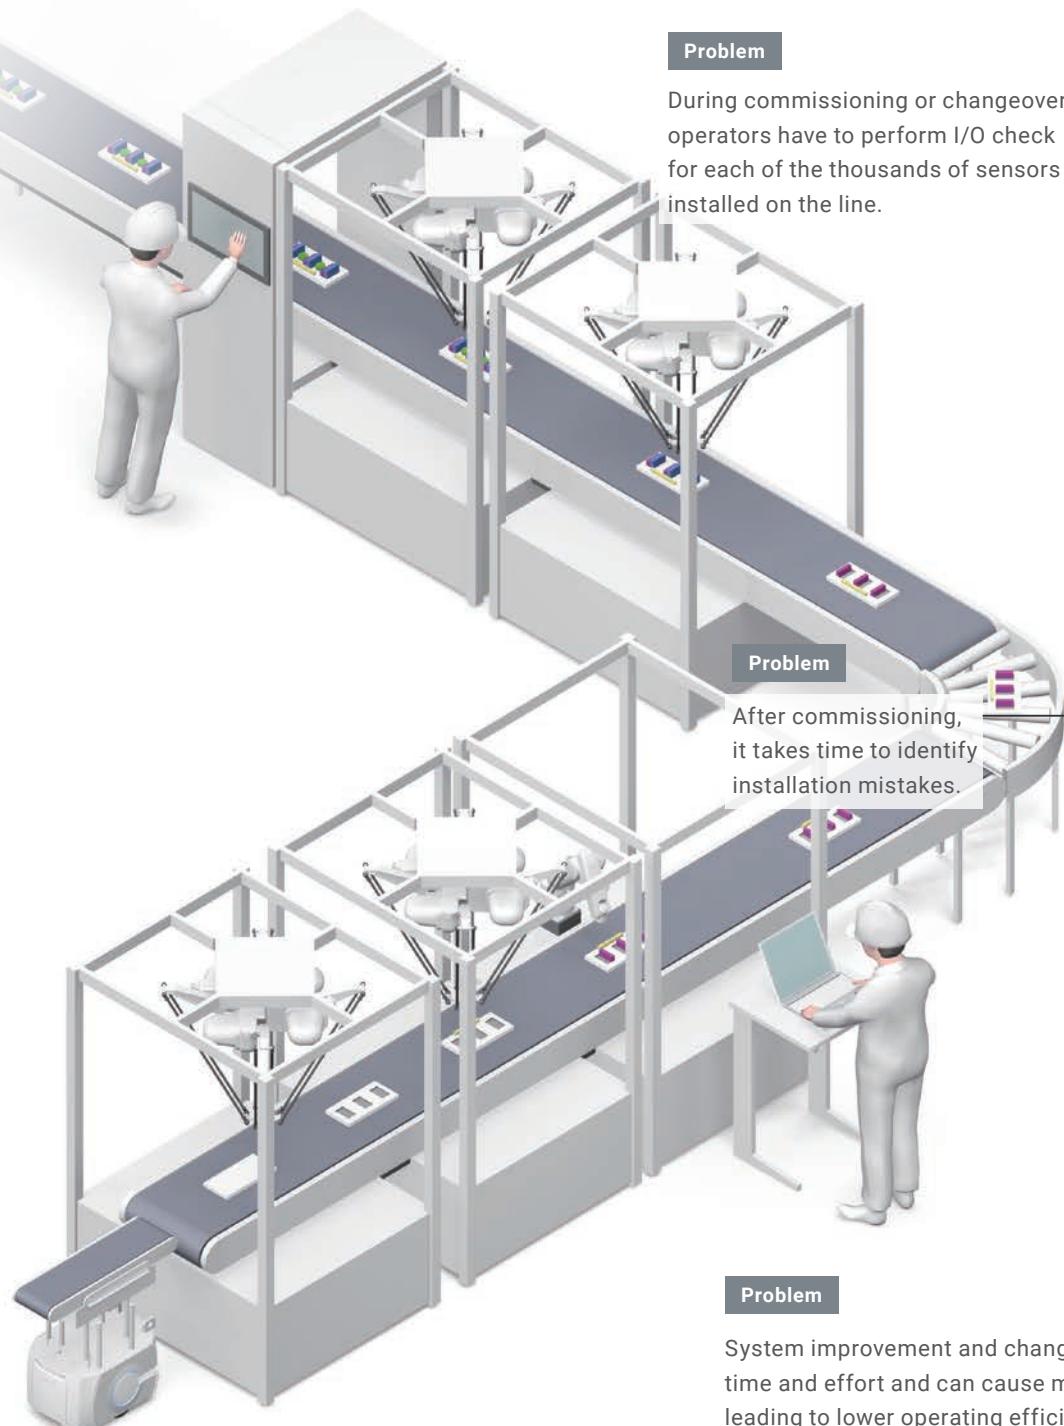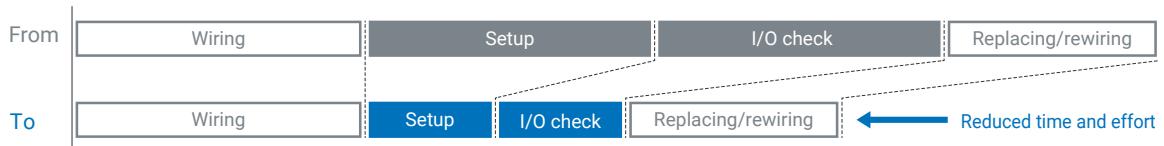

Detect installation mistakes before commissioning

Reduce time required for checking.

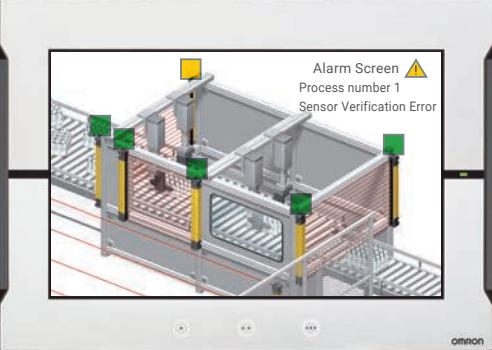


By checking the sensor identification (manufacturer, sensor type, model) on the HMI before commissioning, you can easily detect mistakes such as misconnected or unconnected sensors and installation errors, and can take action immediately. This enables fast commissioning.



Light curtain, photoelectric sensor, proximity sensor, flow sensor

Download all at once from IO-Link device configuration tool

Significantly reduce configuration time.

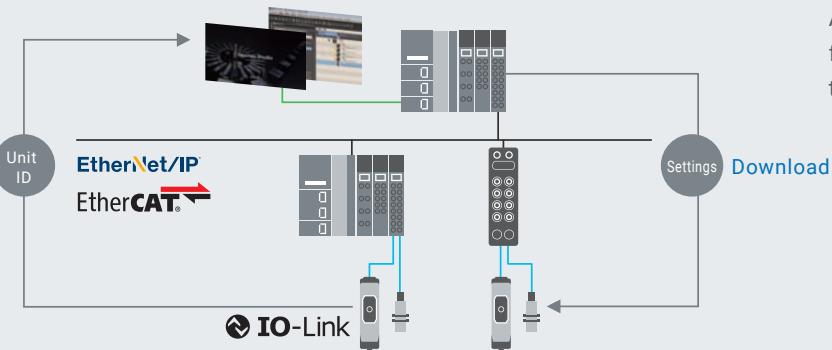

All settings can be downloaded from the host, reducing setup time and inconsistent settings.




Sysmac Studio

Upload wired device information

Reduce setup time by easily checking the status of installed sensors.


Patent pending

Compare and Get Actual IO-Link Device Information

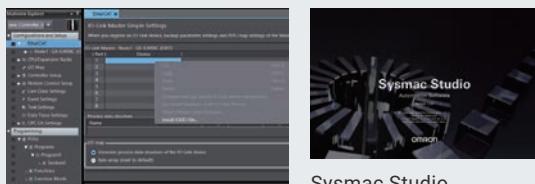

You can set IO-Link device information that can be easily obtained from the physical system configuration. Maintenance is possible even if connected sensor information is unknown.

IO-Link Parameter Backup and Restore

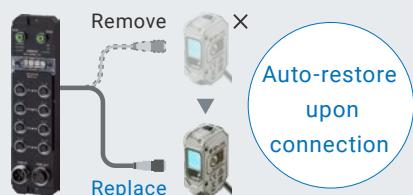

NXR-series IO-Link Master Unit
NXR-ILM08C-EIT-/ECT


IO-Link device parameters can be backed up to the NXR manually or via the controller. Broken sensor parameters are automatically restored when replaced with a new one.

Masters and sensors to match your application

OMRON offers two different types of connection between IO-Link masters and IO-Link sensors: screwless clamping terminal blocks and M12 connectors. The IO-Link masters provide EtherCAT and EtherNet/IP connectivity.

You can choose a model to suit your installation environment and system configuration.

IO-Link Masters

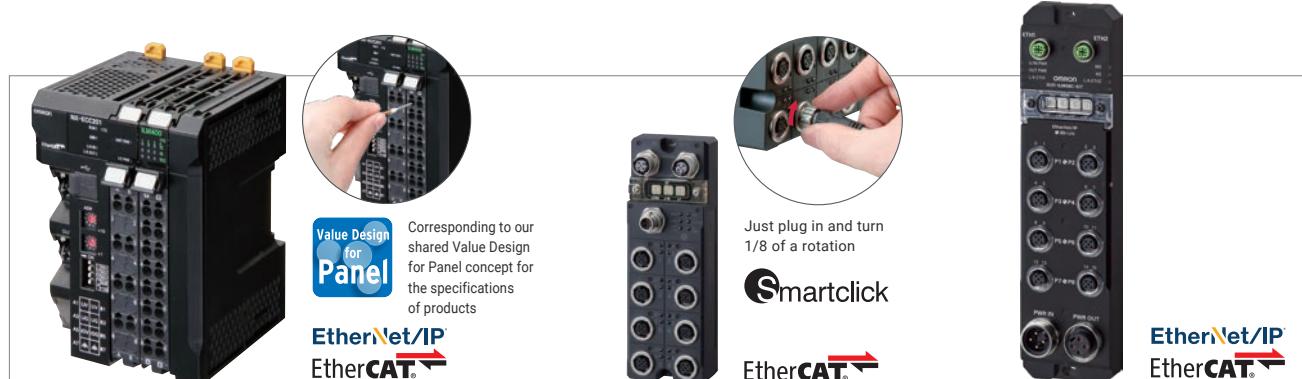



NX-series IO-Link Master unit NX-ILM400 4 IO-Link ports Simple wiring Screwless clamping terminal block	GX-series IO-Link Master unit GX-ILM08C 8 IO-Link ports IP67 protection M12 Smartclick connector	NXR IO-Link Master Unit EtherNet/IP™ NXR-ILM08C-EIT EtherCAT® NXR-ILM08C-ECT 8 IO-Link ports IP67 protection M12 connector
► Page 39	► Page 39	► Page 38

IO-Link Sensors



Safety Light Curtain / Safety Multi-Light Beam F3SG-SR/PG Easy to monitor and ready for IoT	IoT Flow Sensor E8FC-25□ Simultaneous measurement of Flow Rate + Temperature	IoT Pressure Sensor E8PC-□ Simultaneous measurement of Pressure + Temperature	TOF Laser Sensor with Built-in Amplifier/Distance-settable Photoelectric Sensor E3AS E3AS Series changes the "way of using" reflective photoelectric sensors
► Page 36	► Page 24	► Page 24	► Page 25

IO-Link I/O Hub

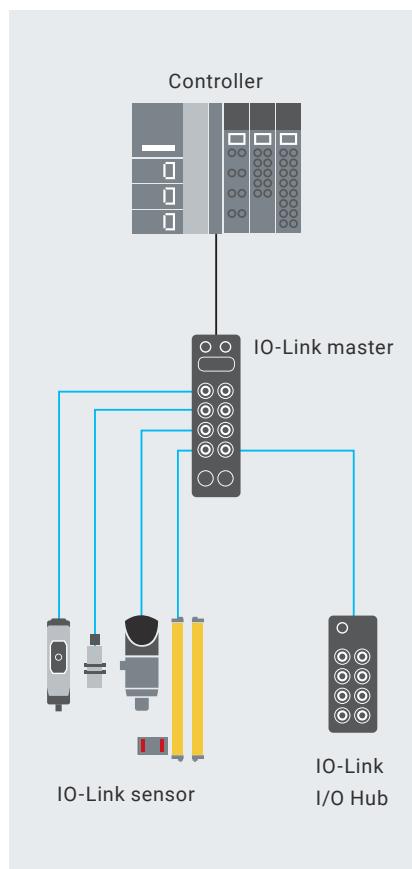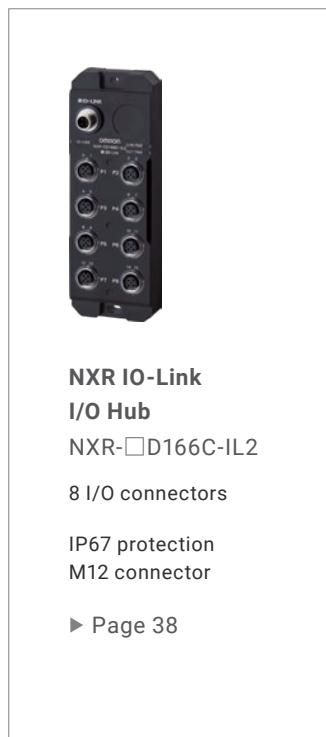

IO-Link Converter



Photoelectric Sensor

E3Z-□-IL□

Standard Photoelectric Sensor

► Page 28



Color Mark Photoelectric Sensor

E3S-DCP21-IL□

Color Mark Detection on Any Type of Packaging

► Page 28



Full metal body Proximity Sensor

E2EW/E2EW-EV

Stable detection in lines containing both aluminum and iron

For welding process ► Page 34



Proximity Sensor

E2E/E2EQ NEXT

Enables easier and standardized designs previously not possible

► Page 29

Overview of IO-Link Compliant Devices

IO-Link Sensors

IoT Flow Sensor

E8FC

Detect signs of abnormalities in Cooling Water, Water-Soluble Coolant, and Water-Insoluble oil by simultaneous measurement of “flow rate + temperature”

- Multi-sensing of “Flow rate + temperature” for preventing a sudden stops or manufacturing defects.
- Various lineup of replacement adapters to enable easy replacement of your current pressure gauges and flow meters.
- Analog current output function in addition to the IO-Link communications function that can perform self-diagnosis of abnormalities in the sensor itself.



Applicable fluid	Rated flow rate range (Pipe diameter)	Connection method	IO-Link baud rate	Model
Liquid	0.6 to 14 l/min (10A) 1 to 30 l/min (15A) 1.5 to 60 l/min (20A) 2 to 100 l/min (25A)	M12 Connector (4-pin)	COM2 (38.4kbps) COM3 (230.4kbps)	E8FC-25□□

For details, refer to E8FC/E8PC Series Catalog (No. E472).

IoT Pressure Sensor

E8PC

Detect signs of abnormalities in hydraulic oil and sealant by simultaneous measurement of “pressure + temperature”

- Multi-sensing of “Pressure + temperature” for preventing a sudden stops or manufacturing defects.
- Various lineup of replacement adapters to enable easy replacement of your current pressure gauges and flow meters.
- Analog current output function in addition to the IO-Link communications function that can perform self-diagnosis of abnormalities in the sensor itself.



Applicable fluid *1	Rated pressure range	Connection method	IO-Link baud rate	Model
Liquid and gas	-0.1 to 1 MPa	M12 Connector (4-pin)	COM2 (38.4kbps) COM3 (230.4kbps)	E8PC-010□□(-E)
Liquid	0 to 10 MPa			E8PC-100□□(-E)
	0 to 40 MPa			E8PC-400□□(-E)

*1. The applicable fluid is a liquid that do not erode the liquid contact part materials (such as water, glycol solution, and oil).

For details, refer to E8FC/E8PC Series Catalog (No. E472).

TOF Laser Sensor with Built-in Amplifier

E3AS-HF Series

High-sensitivity TOF Laser Sensor to increase equipment design flexibility

- A sensing range of 0.05 to 6 m and angle characteristics of $\pm 85^\circ$ max.
- TOF method to stably detect various workpieces
- Laser class 1 for safety
- Automatic Mutual Interference Prevention to reduce equipment disruptions
- OLED Display with 5 languages supported
- Antifouling coating to prevent contamination of the sensing surface
- IP67, IP69K rated, and ECOLAB approved



Spot beam type

 Red light

Connection method	Sensing distance	IO-Link baud rate	Model
Pre-wired (2 m/ 5 m) M12 Connector (horizontal) M12 Connector (vertical) M12 Pre-wired Smartclick Connector (0.3 m)	 A diagram showing a rectangular sensor body with a red light at the top. A horizontal line extends from the light, with dashed lines indicating a distance of 50mm from the sensor and 6000mm to the end of the beam.	COM3 (230.4kbps)	E3AS-HF6000SMT(-□)□ E3AS-HF6000SMT M1□

Diffused beam type

Connection method	Sensing distance	IO-Link baud rate	Model
Pre-wired (2 m/ 5 m) M12 Connector (horizontal) M12 Connector (vertical) M12 Pre-wired Smartclick Connector (0.3 m)	 A diagram showing a rectangular sensor body with a red light at the top. A horizontal line extends from the light, with dashed lines indicating a distance of 50mm from the sensor and 6000mm to the end of the beam.	COM3 (230.4kbps)	E3AS-HF6000DMT(-□)□ E3AS-HF6000DMT M1□

For details, refer to E3AS-HF Series Catalog (No. E626).

Note:1. Please contact your OMRON sales representative regarding the IO-Link setup file (IODE file).

Overview of IO-Link Compliant Devices

IO-Link Sensors

Distance-settable Photoelectric Sensors

E3AS-HL/F/L Series

E3AS Series changes the “way of using” reflective photoelectric sensors

- Complete lineup of photoelectric sensors for various applications.
- Teaching method allows anyone to set optimal threshold values.
- Antifouling coating prevents contamination on the sensing surface.
- Ecolab certified in addition to IP67/69K/67G protection.



E3AS-HL models

Line beam type

Red light

Connection method	Sensing distance (white paper)	IO-Link baud rate	Model
Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M8 Connector (4-pin)	 	COM2 (38.4kbps) COM3 (230.4kbps)	E3AS-HL500LM□(-□) □
			E3AS-HL150LM□(-□) □


Spot type

For details, refer to E3AS-HL/F/L Series Catalog for the automotive industry (No. E594) or E3AS-HL/F/L Series Catalog for the food and commodity industry (No. E595).

E3AS-F models


Metal case type

 Infrared light

Connection method	Sensing distance (white paper)	IO-Link baud rate	Model
Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M8 Connector (4-pin)	 50 mm 1,500 mm	COM2 (38.4kbps) COM3 (230.4kbps)	E3AS-F1500IM□(-□) □
	 50 mm 1,000 mm		E3AS-F1000IM□(-□) □

Plastic case type

 Infrared light

Connection method	Sensing distance (white paper)	IO-Link baud rate	Model
Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M8 Connector (4-pin)	 50 mm 1,500 mm	COM2 (38.4kbps) COM3 (230.4kbps)	E3AS-F1500IP□(-□) □
	 50 mm 1,000 mm		E3AS-F1000IP□(-□) □

E3AS-L models

 Red light

Connection method	Sensing distance (white paper)	IO-Link baud rate	Model
Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M8 Connector (4-pin)	 10 mm 200 mm	COM2 (38.4kbps) COM3 (230.4kbps)	E3AS-L200M□(-□) □
	 10 mm 80 mm		E3AS-L80M□(-□) □

For details, refer to E3AS-HL/F/L Series Catalog for the automotive industry (No. E594) or E3AS-HL/F/L Series Catalog for the food and commodity industry (No. E595).

Overview of IO-Link Compliant Devices

IO-Link Sensors

Photoelectric Sensor

E3Z-□-IL□

IO-Link Makes Sensor Level Information Visible and Solves the Three Major Issues at Manufacturing Sites! Standard Photoelectric Sensor.

- Downtime can be reduced.
Notifies you of faulty parts and such phenomena in the Sensor in real time.
- The frequency of sudden failure can be decreased.
The light incident level monitor prevents false detection before it happens.
- The efficiency of changeover can be improved.
The batch check for individual sensor IDs significantly decreases commissioning time.
- Three types of sensing methods and three types of connection methods are available.



Red light Infrared light

Sensing method	Appearance	Connection method	Sensing distance			IO-Link baud rate	Model
Through-beam (Emitter + Receiver)		Pre-wired (2 m) M12 Pre-wired Smartclick Connector (0.3 m) M8 Connector (4-pin)		15m			E3Z-T8□(-□)-IL□□
Retro-reflective with MSR function		Pre-wired (2 m) M12 Pre-wired Smartclick Connector (0.3 m) M8 Connector (4-pin)		4m		COM2 (38.4kbps) COM3 (230.4kbps)	E3Z-R8□(-□)-IL□□
Diffuse- reflective		Pre-wired (2 m) M12 Pre-wired Smartclick Connector (0.3 m) M8 Connector (4-pin)		1m			E3Z-D8□(-□)-IL□□
		Pre-wired (2 m) M12 Pre-wired Smartclick Connector (0.3 m) M8 Connector (4-pin)		90mm (narrow beam)			E3Z-L8□(-□)-IL□□

*1. The Reflector is sold separately. Select the Reflector model most suited to the application.

For details, refer to E3Z-□-IL□ Data sheet.

Color Mark Photoelectric Sensor

E3S-DCP21-IL□

Color Mark Detection on Any Type of Packaging. Narrow Beam and Large Lens for Stable Detection of Workpieces Tilted at Various Angles.

- Detects subtle color differences.
High luminance, three-element (RGB) LED light source for greater light intensity. Highly efficient optics technology provides high power and enables stable detection even of subtle color differences.
- Handles glossy workpieces.
Thorough noise reduction.
High dynamic range covers everything from black to mirror surfaces.



Red light, Green light, Blue light

Sensing method	Appearance	Connection method	Sensing distance			Output	IO-Link baud rate	Model
Diffuse-reflective (mark detection)		M12 connector		10±3mm		Push-pull	COM2 (38.4kbps) COM3 (230.4kbps)	E3S-DCP21-IL□

For details, refer to E3S-DC/E3NX-CA Series Catalog (No. Y216).

Proximity Sensor

E2E/E2EQ NEXT Series

Enables easier and standardized designs previously not possible

- Nearly double the sensing distance of previous.
- With high-brightness LED, the indicator is visible anywhere from 360°.
- Only 10 Seconds^{*1} to Replace a Proximity Sensor with the “e-jig” (Mounting Sleeve).
- Cables with enhanced oil resistance enabled 2-year oil resistance^{*2}.
- IP69K compliant for water resistance and wash resistance^{*3}.
- Comes in a wide variation to make sensor selection easy.
- UL certification (UL60947-5-2)^{*4} and CSA certification (CSA C22.2 UL60947-5-2-14).



*1. Time required to adjust the distance when installing a Sensor. Based on OMRON investigation.

*2. Refer to *Ratings and Specifications* of E2E/E2EQ Series Catalog (No. D121) for details.

However, E2E Connector Models and E2EQ series is excluded.

*3. E2EQ series is excluded.

*4. M8 (4-pin) Connector Models are not UL certified.

PREMIUM Model E2E NEXT Series (Quadruple distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (4mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector M8 Connector (3-pin/ 4-pin)		E2E-X4B□8(-□) □
M12 (9mm)		COM2 (38.4kbps) COM3 (230.4kbps)	E2E-X9B□12(-□) □
M18 (14mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector		E2E-X14B□18(-□) □
M30 (23mm)			E2E-X23B□30(-□) □

For details, refer to E2E/E2EQ Series Catalog (No. D121).

Note:1. Please contact your OMRON sales representative regarding the IO-Link setup file (IODE file).

Overview of IO-Link Compliant Devices

IO-Link Sensors

PREMIUM Model E2E NEXT Series (Quadruple distance model)

Unshielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (8mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector M8 Connector (3-pin/ 4-pin)		E2E-X8MB□8(-□) □
M12 (16mm)		COM2 (38.4kbps) COM3 (230.4kbps)	E2E-X16MB□12(-□) □
M18 (30mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector		E2E-X30MB□18(-□) □
M30 (50mm)			E2E-X50MB□30(-□) □

PREMIUM Model E2E NEXT Series (Triple distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (3mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector M8 Connector (3-pin/ 4-pin)		E2E-X3B□8(-□) □
M12 (6mm)		COM2 (38.4kbps) COM3 (230.4kbps)	E2E-X6B□12(-□) □
M18 (12mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector		E2E-X12B□18(-□) □
M30 (22mm)			E2E-X22B□30(-□) □

PREMIUM Model E2E NEXT Series (Triple distance model)

Unshielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (6mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector M8 Connector (3-pin/ 4-pin)		E2E-X6MB□8(-□) □
M12 (10mm)		COM2 (38.4kbps) COM3 (230.4kbps)	E2E-X10MB□12(-□) □
M18 (20mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector		E2E-X20MB□18(-□) □
M30 (40mm)			E2E-X40MB□30(-□) □

For details, refer to E2E/E2EQ Series Catalog (No. D121).

BASIC Model E2E NEXT Series (Double distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (2mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector M8 Connector (3-pin/ 4-pin)	COM2 (38.4kbps) COM3 (230.4kbps)	E2E-X2B□8(-□) □
M12 (4mm)	Pre-wired (2 m/ 5 m)		E2E-X4B□12(-□) □
M18 (8mm)	M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector		E2E-X8B□18(-□) □
M30 (15mm)			E2E-X15B□30(-□) □

BASIC Model E2E NEXT Series (Double distance model)

Unshielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (4mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector M8 Connector (3-pin/ 4-pin)	COM2 (38.4kbps) COM3 (230.4kbps)	E2E-X4MB□8(-□) □
M12 (8mm)	Pre-wired (2 m/ 5 m)		E2E-X8MB□12(-□) □
M18 (16mm)	M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector		E2E-X16MB□18(-□) □
M30 (30mm)			E2E-X30MB□30(-□) □

BASIC Model E2E NEXT Series (Single distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (1.5mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector M8 Connector (3-pin/ 4-pin)	COM2 (38.4kbps) COM3 (230.4kbps)	E2E-X1R5B□8(-□) □
M12 (2mm)	Pre-wired (2 m/ 5 m)		E2E-X2B□12(-□) □
M18 (5mm)	M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector		E2E-X5B□18(-□) □
M30 (10mm)			E2E-X10B□30(-□) □

For details, refer to E2E/E2EQ Series Catalog (No. D121).

Overview of IO-Link Compliant Devices

IO-Link Sensors

BASIC Model E2E NEXT Series (Single distance model)

Unshielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (2mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector M8 Connector (3-pin/ 4-pin)		E2E-X2MB□8(-□) □
M12 (5mm)	Pre-wired (2 m/ 5 m)	COM2 (38.4kbps) COM3 (230.4kbps)	E2E-X5MB□12(-□) □
M18 (10mm)	M12 Pre-wired Smartclick Connector (0.3 m)		E2E-X10MB□18(-□) □
M30 (18mm)	M12 Connector		E2E-X18MB□30(-□) □

PREMIUM Model E2EQ NEXT Series (Spatter-resistant Triple distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (3mm)	Pre-wired (2 m/ 5 m)		E2EQ-X3B□8(-□) □
M12 (6mm)	M12 Pre-wired Smartclick Connector (0.3 m)	COM2 (38.4kbps) COM3 (230.4kbps)	E2EQ-X6B□12(-□) □
M18 (12mm)	M12 Connector		E2EQ-X12B□18(-□) □
M30 (22mm)			E2EQ-X22B□30(-□) □

For details, refer to E2E/E2EQ Series Catalog (No. D121).

BASIC Model E2EQ NEXT Series (Spatter-resistant Double distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (2mm)			E2EQ-X2B□8(-□) □
M12 (4mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector	COM2 (38.4kbps) COM3 (230.4kbps)	E2EQ-X4B□12(-□) □
M18 (8mm)			E2EQ-X8B□18(-□) □
M30 (15mm)			E2EQ-X15B□30(-□) □

BASIC Model E2EQ NEXT Series (Spatter-resistant Single distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M8 (1.5mm)			E2EQ-X1R5B□8(-□) □
M12 (2mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector	COM2 (38.4kbps) COM3 (230.4kbps)	E2EQ-X2B□12(-□) □
M18 (5mm)			E2EQ-X5B□18(-□) □
M30 (10mm)			E2EQ-X10B□30(-□) □

For details, refer to E2E/E2EQ Series Catalog (No. D121).

Overview of IO-Link Compliant Devices

IO-Link Sensors

Welding Proximity Sensor

E2EW Series DC 3-wire

Stable detection in lines containing both aluminum and iron

- Equivalent sensing distances for both iron and aluminum ^{*1}.
- Enables common design for lines with both iron and aluminum ^{*1}.
- The long distance sensing range, which means fewer false detections and thereby fewer unexpected stoppages.
- OMRON's unique fluororesin coating technologies enable longlasting spatter resistance ^{*3}, eliminates the need to replace for 10 years ^{*2}.
- Durable full metal body to reduce unexpected stoppages.
- Laser printed information (sensing distance on the sensor head, model on the cable, and model on the metal part of the connector model) can be reducing errors during sensor replacement. ^{*4}
- Equipped with a function, which effectively cancels pulse noise of current magnetic field. ^{*1}
- UL certification (UL60947-5-2) and CSA certification (CSA C22.2 UL60947-5-2-14).



*1. PREMIUM Models only.

*2. This value assumes that the sensor operates 10 hours a day in an arc welding environment and is cleaned once a month (12 times a year). If our previous model (E2EF-Q) needs to be replaced once every 3 times it is cleaned, the E2EW-Q Proximity Sensor needs to be replaced once every 180 times it is cleaned. This means that there is no need to replace the E2EW-Q Proximity Sensor for 10 or more years.

*3. Models with spatter-resistant coating only.

*4. Models without spatter-resistant coating only.

PREMIUM Model E2EW Series (Quadruple distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M12 (7mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector	COM2 (38.4kbps) COM3 (230.4kbps)	E2EW-X7B□12(-□) □
M18 (12mm)			E2EW-X12B□18(-□) □
M30 (22mm)			E2EW-X22B□30(-□) □

PREMIUM Model E2EW Series (Triple distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M12 (6mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector	COM2 (38.4kbps) COM3 (230.4kbps)	E2EW-X6B□12(-□) □
M18 (10mm)			E2EW-X10B□18(-□) □
M30 (20mm)			E2EW-X20B□30(-□) □

For details, refer to E2EW Series Catalog (No. D122).

PREMIUM Model E2EW-Q Series (Spatter-resistant Quadruple distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M12 (7mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector	COM2 (38.4kbps) COM3 (230.4kbps)	E2EW-QX7B□12(-□) □
M18 (12mm)			E2EW-QX12B□18(-□) □
M30 (22mm)			E2EW-QX22B□30(-□) □

PREMIUM Model E2EW-Q Series (Spatter-resistant Triple distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M12 (6mm)	Pre-wired (2 m/ 5 m) M12 Pre-wired Smartclick Connector (0.3 m) M12 Connector	COM2 (38.4kbps) COM3 (230.4kbps)	E2EW-QX6B□12(-□) □
M18 (10mm)			E2EW-QX10B□18(-□) □
M30 (20mm)			E2EW-QX20B□30(-□) □

For details, refer to E2EW Series Catalog (No. D122).

EV Battery Manufacturing Proximity Sensor E2EW-EV Series

Copper- and zinc-free^{*1} EV battery manufacturing proximity sensor

- Equivalent sensing distances for both iron and aluminum.
- Enables common design for lines with both iron and aluminum.
- The exceptional sensing range, which means fewer false detections and thereby fewer unexpected stoppages.
- Durable full metal body to reduce unexpected stoppages.
- Laser printed information (sensing distance on the sensor head and model on the cable) can be reducing errors during sensor replacement.
- UL certification (UL60947-5-2) and CSA certification (CSA C22.2 UL60947-5-2-14).



*1. Metals used for a housing contain 5% or less of specific substances. (Based on our investigation.)

PREMIUM Model (Triple distance model)

Shielded

Size (Sensing distance)	Connection method	IO-Link baud rate	Model
M12 (6mm)	Pre-wired (2 m) M12 Pre-wired Smartclick Connector (0.3 m)	COM2 (38.4kbps) COM3 (230.4kbps)	E2EW-X6B□12(-□) -EV□
M18 (10mm)			E2EW-X10B□18(-□) -EV□

For details, refer to E2EW-EV Series Datasheet (No. D127).

Note:1. Please contact your OMRON sales representative regarding the IO-Link setup file (IODE file).

Overview of IO-Link Compliant Devices

IO-Link Sensors

Safety Light Curtain / Safety Multi-Light Beam

F3SG-SR/PG

Easy to monitor and ready for IoT

- Conforms to major international standards.
- Environmental resistance and rugged structure for use in any environment (IP67, IP67G *1).
- A broad line-up, from finger protection to body protection.
- Flexible height model for easy integration into machines and lines.
- For diverse applications, from simple protection to data utilization.

*1. IEC 60529/JIS C 0920 Annex 1



Safety Light Curtain F3SG-SR

Finger protection (Detection capability: 14-mm dia.)

Number of beams	Protective height (mm)	Advanced Model	Standard Model
15 to 199	160 to 2,000	F3SG-4SRA□□□□-14(-F)	F3SG-4SRB□□□□-14(-F)

Hand protection (Detection capability: 25-mm dia.)

Number of beams	Protective height (mm)	Advanced Model	Standard Model
8 to 124	160 to 2,480	F3SG-4SRA□□□□-25(-F)	F3SG-4SRB□□□□-25(-F)

Arm/Leg protection (Detection capability: 45-mm dia.)

Number of beams	Protective height (mm)	Advanced Model	Standard Model
6 to 38	240 to 1,520	F3SG-4SRA□□□□-45	F3SG-4SRB□□□□-45

Body (Detection capability: 85-mm dia.)

Number of beams	Protective height (mm)	Advanced Model	Standard Model
4 to 12	280 to 920	F3SG-4SRA□□□□-85	F3SG-4SRB□□□□-85

Note:1. Mounting brackets are not included. Order brackets sold separately.

Note:2. Connection cables are not included with the safety light curtain. Order cables sold separately.

For details, refer to F3SG-SR/PG Series Catalog (No. F105).

Safety Multi-Light Beam F3SG-PG

Perimeter access guarding (Beam gap: 300 to 500 mm)

Number of beams	Product length (mm)	Advanced Model
2, 3 and 4	670 to 1,370	F3SG-4PGA□□□□-□A

Perimeter guarding long range (Beam gap: 300 to 500 mm)

Number of beams	Product length (mm)	Advanced Model
2, 3 and 4	670 to 1,370	F3SG-4PGA□□□□-□L

Perimeter guarding passive mirror (Beam gap: 300 to 500 mm)

Number of beams	Product length (mm)	Advanced Model
2, 3 and 4	670 to 1,370	F3SG-4PGA□□□□-2C/4C

Note:1. Mounting brackets are not included. Order brackets sold separately.

Note:2. Connection cables are not included with the safety multi-light beam. Order cables sold separately.

Intelligent Tap

Used to configure the F3SG-SR/PG and connect external devices via IO-Link.

Appearance	Type	Model
	Intelligent Tap	F39-SGIT-IL3

Note:1. The cable to connect between the intelligent tap and IO-Link master unit is available.

For details, refer to F3SG-SR/PG Series Catalog (No. F105).

Note:1. Please contact your OMRON sales representative regarding the IO-Link setup file (IODE file).

Overview of IO-Link Compliant Devices

IO-Link Master Unit

IP67 Remote Terminal NXR-series IO-Link Master Unit

NXR-ILM08C-EIT/NXR-ILM08C-ECT

Streamline commissioning and maintenance of production equipment Simple, easy, and quick-Reduce Availability Loss and Quality Loss!

- Replacement without software by I/O port quick settings.
- Visualization of communication quality.
- Counts IO-Link and Ethernet communication errors.
- LED indicator:Superior visibility by color universal design.



EtherNet/IP
EtherCAT

Name	Number of IO-Link ports	Degree of protection	Port connection	Model
EtherNet/IP IO-Link Master Unit	8	IP67	M12 connector (A-coding female)	NXR-ILM08C-EIT
EtherCAT IO-Link Master Unit				NXR-ILM08C-ECT

For details, refer to NXR Series Catalog (No. R202).

IO-Link I/O Hub

IP67 Remote Terminal NXR-series IO-Link I/O Hub

NXR-□D166C-IL2

Reduced wiring system with IO-Link

- Simple wiring via IO-Link master.
- Condition monitoring of machines.
- Detects disconnections and short circuits in I/O cables.
- Measures voltage of power supplied to units.
- LED indicator:Superior visibility by color universal design.



Name	Number of I/O ports	Number of inputs/outputs	Degree of protection	Port connection	Model
IO-Link I/O Hub	8	16 digital inputs	IP67	M12 connector (A-coding female)	NXR-ID166C-IL2
		16 digital inputs/outputs			NXR-CD166C-IL2

For details, refer to NXR Series Catalog (No. R202).

IO-Link Master Unit

NX-series IO-Link Master Unit

NX-ILM400

IO-Link makes sensor level information visible and solves the three major issues at manufacturing sites! The screwless clamping terminal block reduces wiring work.

- Downtime can be reduced. Notifies you of faulty parts and such phenomena in the Sensor in real time.
- The frequency of sudden failure can be decreased. Condition monitoring of sensors and equipment to prevent troubles.
- The efficiency of changeover can be improved. The batch check for individual sensor IDs significantly decreases commissioning time.



EtherNet/IP
EtherCAT

Product Name	Number of IO-Link ports	I/O refreshing method	I/O connection terminals	Model
NX-series IO-Link Master Unit	4	Free-Run refreshing	Screwless clamping terminal block	NX-ILM400

For details, refer to NX-ILM400 Data sheet.

GX-series IO-Link Master Unit

GX-ILM08C

IO-Link makes sensor level information visible and solves the three major issues at manufacturing sites! The unit for M12 Smartclick connector can be used in watery, and dusty environments.

- Downtime can be reduced. Notifies you of faulty parts and such phenomena in the Sensor in real time.
- The frequency of sudden failure can be decreased. Condition monitoring of sensors and equipment to prevent troubles.
- The efficiency of changeover can be improved. The batch check for individual sensor IDs significantly decreases commissioning time.



EtherCAT

Product Name	Number of IO-Link ports	Environmental resistance	I/O connection terminals	Model
GX-series IO-Link Master Unit	8	IP67	M12 connector (A-coding female)	GX-ILM08C

For details, refer to GX Series Data sheet.

Automation Software Sysmac Studio

For details, refer to Sysmac Studio Ver.1.□□ Data sheet.

Note:1. CX-ConfiguratorFDT for IO-Link sensor setup is included in Sysmac Studio.

Note:1. Please contact your OMRON sales representative regarding the IO-Link setup file (IODE file).

Overview of IO-Link Compliant Devices

IO-Link Converter

AD Converter

K3CV

Analog signals are converted to digital signals with high precision and output via IO-Link communication. Improves signal accuracy and reliability while simplifying wiring to reduce costs



Selecting/Setting

- Select input type by model name
- Can be used without tools

Usability

- Easy connection with Smartclick
- Slim body for improved connectivity

User Interface

- Indicator indicates operating status
- Nameplates simplify equipment management

Number of channels	Input Type	Input type details	Model
1	Analog Input	Analog current 4 to 20 mA	K3CV-1ADIA-IL3
		Analog current 0 to 20 mA	K3CV-1ADIB-IL3
		Analog voltage 0 to 10 V	K3CV-1ADVA-IL3
		Analog voltage -10 to 10 V	K3CV-1ADVB-IL3
	Thermocouples	K Thermocouple -20.0 to 500.0°C	K3CV-1TCKA-IL3
	Resistance Temperature Detector	Resistance temperature detector: -200.0 to 500.0°C	K3CV-1PTPA-IL3

For details, refer to K3CV series Catalog (No. H242) and Data Sheet (No. H243).

Note:1. Please contact your OMRON sales representative regarding the IO-Link setup file (IODE file).

MEMO

MEMO

MEMO

- EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.
- EtherNet/IP™ is a trademark of ODVA.
- USB Type-C™ is a trademark of USB Implementers Forum.
- Smartclick is a trademark or registered trademark of OMRON Corporation in Japan and other countries.
- Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.
- The product photographs and figures that are used in this catalog may vary somewhat from the actual products.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN

Contact : www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.
Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ASIA PACIFIC PTE. LTD.
438B Alexandra Road, #08-01/02 Alexandra
Technopark, Singapore 119968
Tel: (65) 6835-3011 Fax: (65) 6835-3011

OMRON ELECTRONICS LLC
2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON (CHINA) CO., LTD.
Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

Authorized Distributor: