


FEATURES

- **High thermal conductivity:** Ensures efficient heat transfer, reducing the risk of overheating.
- **Wide operating temperature range:** Functions effectively from -60 °C to 180 °C, suitable for various environments.
- **Non-adhesive design:** Allows for easy repositioning and removal without residue.
- **Thin profile:** At 0.15 mm thickness, it fits into compact spaces without compromising performance.
- **Compliance with standards:** Meets ANSI-ESD S20.20:2021, REACH, and RoHS standards, ensuring safety and environmental responsibility.

RS PRO 19mm Thermal Conductive Pad, 1.5 W/mK

RS Stock No: 655-985

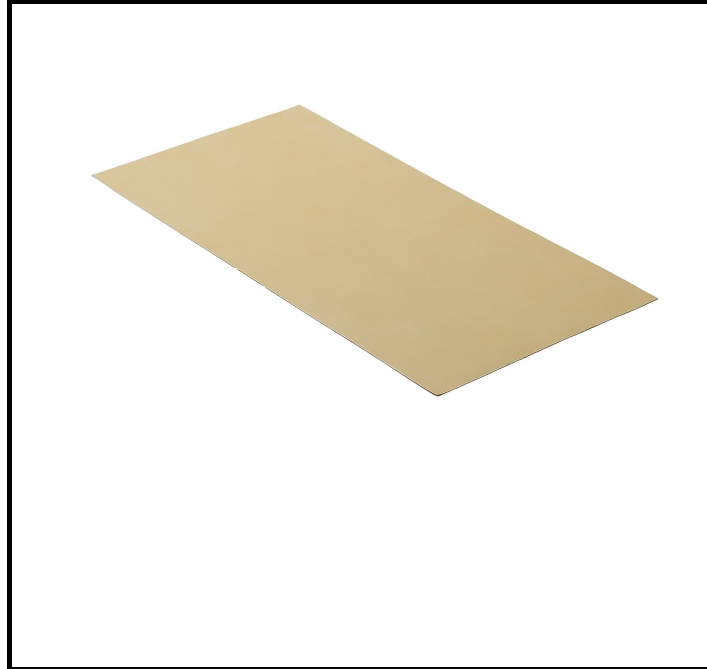

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Thermal Conductive Pad is designed to efficiently transfer heat between components, ensuring optimal performance and longevity of electronic devices. With a thermal conductivity of 1.5 W/mK, it is ideal for applications requiring effective thermal management.

General Specifications

Colour	Yellow
Product Type	Thermal Conductive Pad
Self-Adhesive	No

Mechanical Specifications

Length	19 mm
Thickness	0.15 mm
Width	25.4 mm

Operation Environment Specifications

Maximum Operating Temperature	180 °C
Minimum Operating Temperature	-60 °C

Approvals

Standards/Approvals	ANSI-ESD S20.20:2021, REACH, RoHS
---------------------	-----------------------------------

Thermal Performance Specifications

Thermal Conductivity	1.5 W/mK
----------------------	----------