




Connectors > Pluggable IO Connectors & Cages

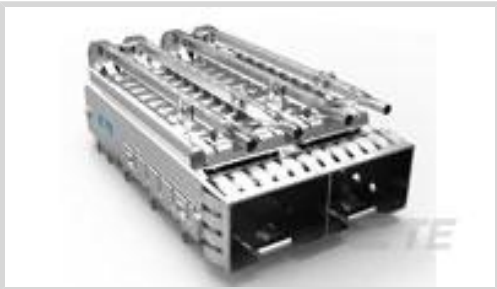

Form Factor: **SFP+**

Pluggable I/O Product Type: **Cage Assembly**

Sealable: **No**

Circuit Application: **Signal**

Operating Temperature Range: **-55 – 105 °C [-67 – 221 °F]**

Features

Product Type Features

Cage Type	Ganged
Thermal Accessory Type Included	Heat Sink
Form Factor	SFP+
Pluggable I/O Product Type	Cage Assembly
Sealable	No

Configuration Features

Lightpipe Style	Reduced Length
Number of Ports	2
Port Matrix Configuration	1 x 2

Electrical Characteristics

Data Rate (Max)	16 Gb/s
-----------------	---------

Body Features

Heat Sink Style	Pin
	.165 in
Heat Sink Height Class	PCI

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	2.05 mm[.081 in]

Housing Features

--	--



Cage Material	Nickel Silver
---------------	---------------

Dimensions

PCB Thickness (Recommended)	2.25 mm[.089 in]
-----------------------------	------------------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Pluggable I/O Applications	SFP+ Enhanced
Heat Sink Compatible	Yes
Circuit Application	Signal

Packaging Features

Packaging Method	Tray
------------------	------

Other

Included Lightpipe	Yes
EMI Containment Feature Type	Internal/External EMI Springs

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides




on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 2142970-3
CABLE ASSY, MICRO SFP+ TO STD SFP+, 2M

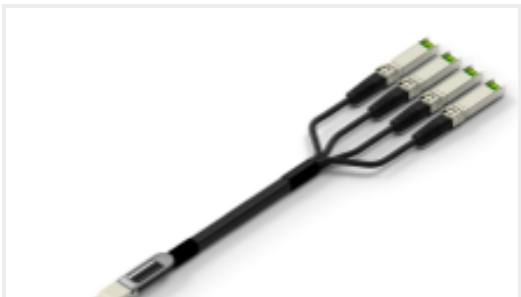

TE Part # CAT-Q17-N490333
QSFP56-Four SFP56 Cable Assembly: 26 AWG

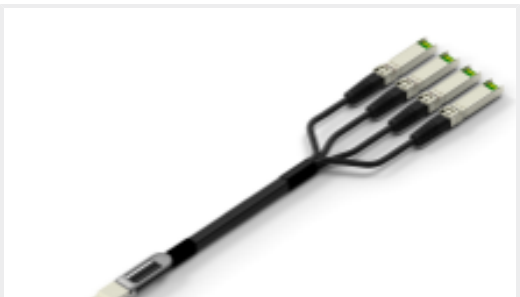

TE Part # CAT-C11-N490333
QSFP28-Four SFP+ Cable Assembly: 30 AWG

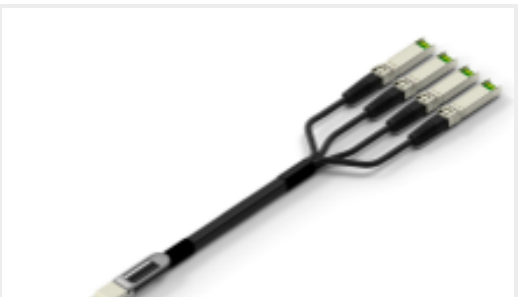

TE Part # CAT-C11-N490325
QSFP28-Four SFP+ Cable Assembly: 26 AWG



TE Part # 2821033-8
QSFP TO [4]SFP+, 28G, 1M, 33AWG



TE Part # 2142970-6
CABLE ASSY, MICRO SFP+ TO STD SFP+, 5M



TE Part # 2142970-5
CABLE ASSY, MICRO SFP+ TO STD SFP+, 4M



TE Part # CAT-C11-H506
SFP+ to SFP+ I/O Cable Assembly: 26 AWG



TE Part # CAT-C11-H5
SFP+ to SFP+ I/O Cable Assembly: 24 AWG



TE Part # CAT-C11-H50626
SFP+ to SFP+ I/O Cable Assembly: 30 AWG



TE Part # 2142970-1
CABLE ASSY, MICRO SFP+ TO STD SFP+, 0.5M



TE Part # 2110759-1
PT CONN ASSY 20 POS 16G SFP



TE Part # 4-2334985-2
SFP56 DIRECT ATTACH CA, 1M, 32AWG



TE Part # CAT-C11-N4901114
SFP28 to SFP28 Cable Assembly: 30 AWG



TE Part # 2142970-7
CABLE ASSY, MICRO SFP+ TO STD SFP+, 6M



TE Part # 4-2821222-5
SFP56 DIRECT ATTACH CA, 2M, 30AWG





TE Part # CAT-C11-H5062

SFP+ to SFP+ I/O Cable Assembly: 28 AWG



TE Part # 2142970-2

CABLE ASSY, MICRO SFP+ TO STD SFP+, 1M



TE Part # 2334985-2

SFP28 DIRECT ATTACH CA, 1M, 32AWG



TE Part # 2142970-4

CABLE ASSY, MICRO SFP+ TO STD SFP+, 3M

Customers Also Bought



TE Part #1-2170287-1

1X4 CAGE ASSEMBLY, QSFP,SINGLE SQ LP



TE Part #1934949-1

Tinman 5pr 8col vert rcpt 15mm stack



TE Part #1734100-3

Champ050 series,30pos,Au over PdNi



TE Part #1-1871058-5

PCI EXPRESS CONN. EON TYPE, 280P, L=3.25



TE Part #1734101-3

Champ050 series,30pos,Au over PdNi



TE Part #6-2213362-2

RCPT ASSY,DIMMABLE PHOTOCNTROL,150C,3 P



TE Part #2-6450880-4

MBXLE R/A RCPT 4P16S4P



TE Part #5-1375870-4

RCPT ASSY,12 POS,VERT,0.8MM MI



TE Part #2132529-3

IMP100S,H,V3P6C,LG,REW39,5.5



TE Part #2007808-2

IMP100S,H,V4P10C,LG,OEW46,4.9

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2198231-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2198231-1_A.3d_igs.zip

English



Customer View Model

[ENG_CVM_CVM_2198231-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English