


Start Waterproof LED G3 Emergency START WATERPROOF LED G3 1200MM T 4K E3 0048620



Product features

- Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 5000 lm, 40 W, 125 lm/W, 4000 K, drive current 350 mA, non dimmable, 3 hours emergency, CRI 80, IP65, IK08, Class I, nominal average life (h): 50000, 1278mm x 110mm x 78mm, energy class: A++ A+ A

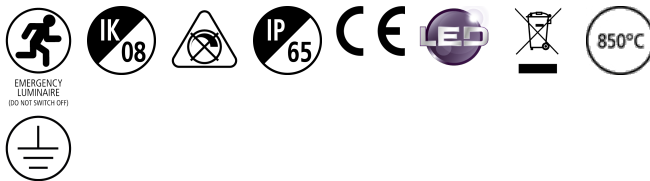

PRODUCT OVERVIEW

| | |
|--------------------------------|---|
| IPC Code | 0048620 |
| Product name | START WATERPROOF LED G3 1200MM T 4K E3 |
| Technology | LED |
| Housing | Polycarbonate |
| Mount | Ceiling Mounting and Suspended Mounting |
| Fixture rating | Enclosed |
| General application | Logistics & Industry |
| Certifications | EUNEW002 |
| ETIM Class | EC000109 |
| Fixture luminous flux (lm) | 5000 |
| Luminaire efficacy (lm/W) | 125 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Beam Angle (°) | 100 |
| Photobiological Risk Group | RG0 |
| Luminous flux (emergency) (lm) | 220 |
| Total power consumption (W) | 40 |
| Electrical protection | Class I |
| Control gear type | Electronic + Emergency |
| Dimmable | No |
| Average life (Nominal) (h) | 50000 |
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK08 |
| Product EAN number | 5410288486208 |
| Luminous flux (emergency) (lm) | 220 |
| Lamps | Yes |
| Included lamp | INTEGRATED LED |

Start Waterproof LED G3 Emergency

START WATERPROOF LED G3 1200MM T 4K E3
0048620

DATA TABLE

General data

| | |
|----------------------------------|---|
| IPC Code | 0048620 |
| Product name | START WATERPROOF LED G3 1200MM T 4K E3 |
| Technology | LED |
| Housing | Polycarbonate |
| Mount | Ceiling Mounting and Suspended Mounting |
| Fixture rating | Enclosed |
| General application | Logistics & Industry |
| Operating Temperature Range (°C) | 0°C to +30°C |
| Certifications | EUNEW002 |
| ETIM Class | EC000109 |

Optical data

| | |
|--------------------------------|---------------|
| Fixture luminous flux (lm) | 5000 |
| Luminaire efficacy (lm/W) | 125 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Beam Angle (°) | 100 |
| Distribution type | Direct |
| Photobiological Risk Group | RG0 |
| Luminous flux (emergency) (lm) | 220 |
| Emergency duration (h) | 3 |

Electrical data

| | |
|-----------------------------|------------------------|
| Total power consumption (W) | 40 |
| Mains voltage (V) | 220-240V~ |
| Electrical protection | Class I |
| Control gear required | No |
| Control gear type | Electronic + Emergency |
| Dimmable | No |
| Drive current (mA) | 350 |
| Glow Wire Test (°C) | 850 |
| Nominal Frequency (Hz) | 50/60Hz |

Lifetime data

| | |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 60000 |
| Lumen maintenance - L70 B20 | 60000 |
| Lumen maintenance - L70 B10 | 60000 |
| Lumen maintenance - L80 B50 | 60000 |
| Lumen maintenance - L80 B20 | 60000 |
| Lumen maintenance - L80 B10 | 60000 |
| Lumen maintenance - L90 B50 | 59000 |
| Lumen maintenance - L90 B20 | 53000 |
| Lumen maintenance - L90 B10 | 50000 |
| Average life (Nominal) (h) | 50000 |

Start Waterproof LED G3 Emergency START WATERPROOF LED G3 1200MM T 4K E3 0048620

Physical data

| | |
|-----------------------------|---------------|
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK08 |
| Diffuser finish | Clear |
| Diffuser material | Polycarbonate |
| Nominal Product Length (mm) | 1278 |
| Nominal Product Width (mm) | 110 |
| Nominal Product Height (mm) | 78 |
| Weight (kg) | 2.06 |



Packaging

| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5410288486208 |
| Packaging single length / height (cm) | 137.2 |
| Packaging single width (cm) | 11.6 |
| Packaging single depth (cm) | 8.4 |
| DUN14 (outer) | 05410288486208 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 137.2 |
| Packaging outer width (cm) | 11.6 |
| Packaging outer depth (cm) | 8.4 |


Safety data

| | |
|---------------------------|----|
| Dry applications use only | No |
|---------------------------|----|

PHOTOMETRY

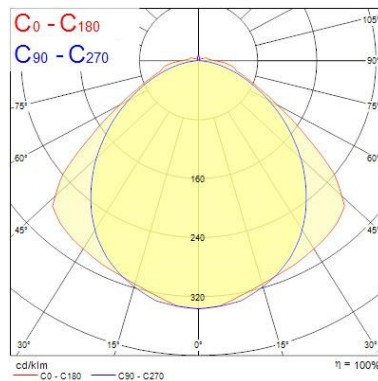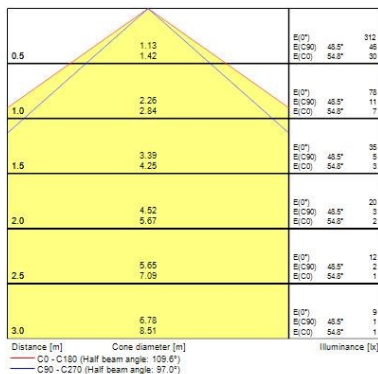

Start Waterproof LED G3 Emergency START WATERPROOF LED G3 1200MM T 4K E3 0048620

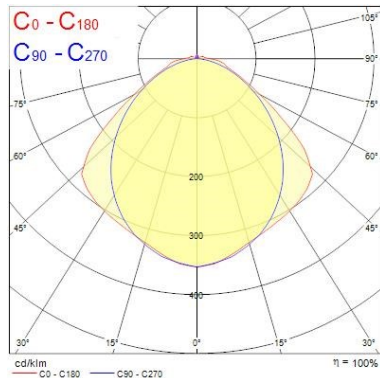

| Distance [m] | Cone diameter [m] | Beam angle [°] | Beam angle [°] | Illuminance [lx] |
|--------------|-------------------|----------------|----------------|------------------|
| 0.5 | 1.20 1.47 | 50.1° 55.8° | 50.1° 55.8° | 6829 303 |
| 1.0 | 2.39 2.94 | 50.1° 55.8° | 50.1° 55.8° | 1707 228 |
| 1.5 | 3.59 4.41 | 50.1° 55.8° | 50.1° 55.8° | 789 100 |
| 2.0 | 4.78 5.89 | 50.1° 55.8° | 50.1° 55.8° | 427 56 |
| 2.5 | 5.98 7.36 | 50.1° 55.8° | 50.1° 55.8° | 273 36 |
| 3.0 | 7.18 8.83 | 50.1° 55.8° | 50.1° 55.8° | 190 25 |

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 111.6°)
C90 - C270 (Half beam angle: 150.2°)

TECHNICAL DRAWINGS



SYLVANIA 0048620

This luminaire contains built in LED lamps.

A++

A+

A

B

C

D

E

LED

The lamps cannot be changed in the luminaire.

874/2012

Start Waterproof LED G3 Emergency START WATERPROOF LED G3 1200MM T 4K E3 0048620

