

M8/M12 Connector


PCA/EX9/EX500 Series

Fieldwireable Connectors

Reduction in wiring time

The man-hours can be decreased because no exclusive tools (such as solder, crimped terminal) are required. Also, the wire length can be adjusted at the site.

QUICKON-ONE



Piercecon®



Spring-cage Connection




Conforming to IEC61076-2-101



SPEEDCON

Reduction in wiring time

Just insert the connector and make 1/2 rotation.

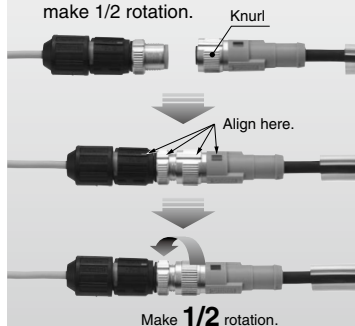

EX12

EX140

EX180

EX260

EX250


EX600

EX500

EX510


PCA
EX

IP67 (IEC60529)

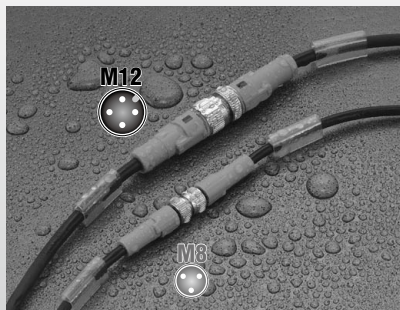

Conforming to IEC60947-5-2

The coloring and number indication to the electrical connection makes less wrong wiring.

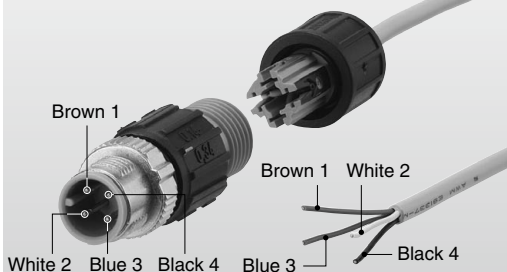


It provides the Fieldbus communication unit and input device applicable to

● Communication Cable/Connector ▶ P. 912 to P. 915

● It has a product lineup applicable to any communication standards.

The SMC Fieldbus (SI) Unit can be connected to the PLC (controller) and communication units of other manufacturers with cables with connectors and fieldwireable connectors (with shield) applicable to the standards of CC-Link, DeviceNet™, and PROFIBUS DP.



CC-Link

▶ P.912

DeviceNet™

▶ P.913

PROFIBUS®

▶ P.914

Communication cable

SPEEDCON

Socket (Female)
① For CC-Link
⑤ For DeviceNet™
⑩ For PROFIBUS DP

SPEEDCON

Plug (Male)
② For CC-Link
⑥ For DeviceNet™
⑪ For PROFIBUS DP

Fieldwireable communication connector

Plug (Male)
③ For CC-Link
⑦ For DeviceNet™
⑫ For PROFIBUS DP

Socket (Female)
④ For CC-Link
⑧ For DeviceNet™
⑬ For PROFIBUS DP

Terminal plug (Terminating resistor)

It is connected to the communication port of the communication unit connected at the end.

For DeviceNet™ (Plug)

For PROFIBUS DP (Plug/B-coded)

● Product Table

Description	Application	No.	SMC part no.	Name
Cable with connector	For Fieldbus communication	①	PCA-1567720	Communication cable for CC-Link (Socket)
		②	PCA-1567717	Communication cable for CC-Link (Plug)
		⑤	PCA-1557633	Communication cable for DeviceNet™ (Socket)
		⑥	PCA-1557646	Communication cable for DeviceNet™ (Plug)
		⑩	PCA-1557688	Communication cable for PROFIBUS DP (Socket/B-coded)
		⑪	PCA-1557691	Communication cable for PROFIBUS DP (Plug/B-coded)
Fieldwireable connector	For Fieldbus communication	③	PCA-1557617	Fieldwireable connector for CC-Link (Plug/Spring-caged)
		④	PCA-1557620	Fieldwireable connector for CC-Link (Socket/Spring-caged)
		⑦	PCA-1557659	Fieldwireable connector for DeviceNet™ (Plug/Spring-caged)
		⑧	PCA-1557662	Fieldwireable connector for DeviceNet™ (Socket/Spring-caged)
		⑫	PCA-1557701	Fieldwireable connector for PROFIBUS DP (Plug/B-coded/Spring-caged)
		⑬	PCA-1557714	Fieldwireable connector for PROFIBUS DP (Socket/B-coded/Spring-caged)
Terminal plug	For Fieldbus communication	⑨	PCA-1557675	Terminating resistor for DeviceNet™ (M12)
		⑭	PCA-1557727	Terminating resistor for PROFIBUS DP (M12/B-coded)

M8/M12 connector and the sensor/switch connected to them as a total system.

Between Sensor/Switch and Input Device ▶ P. 916 to P. 919

Connection between connectors and products

Pressure switch



Auto switch



Pre-wired type



Fieldwireable connector ▶P.917

It has a product lineup of the fieldwireable connector that does not need any special tools.
The lead wires can easily be made into M8/M12 connector by changing the wire length.

M8  Piercecon® connection

M12 SPEEDCON

"QUICKON-ONE" connection

Y connector ▶P.919

The input block reads 2 sensor signals with one port.
The wires of the auto switch and the pressure switch that has one output type can be decreased by unifying the signal wires using a Y connector.

M12 SPEEDCON x 2 → M12 SPEEDCON 20

M8 x 2 → M12 SPEEDCON 21

* 2-input type input block is the M12-type connector only.

Cable with connector ▶P.918

The wiring can be changed accordingly.

M8 15, 19

M12 SPEEDCON 16, 18

M12 SPEEDCON 17, 18

M12 SPEEDCON 18

M12 SPEEDCON 18

Input block

Input unit manifold

- EX500 series

Select the input block of the EX500 series according to the sensor output specification.

M12

- EX500-IE3, 4
- EX500-IE1, 2
- EX500-IE5, 6

Manifold solenoid valve with input/output unit

- EX250 series

M12

- EX250-IE1, 2
- EX250-IE3




- EX12
- EX140
- EX180
- EX260
- EX250
- EX600
- EX500
- EX510
- PCA EX

Product Table

Description	Application	No.	SMC part no.	Name
Cable with connector	For sensor 	18	PCA-1557769	Cable with M12 connector (4 pins/3 m)
		19	PCA-1557772	Cable with M8 connector (3 pins/3 m)
Fieldwireable connector	For sensor 	15	PCA-1557730	Fieldwireable connector (M8/3 pins/Plug/Piercecon® connection)
		16	PCA-1557743	Fieldwireable connector (M12/4 pins/Plug/QUICKON-ONE connection/SPEEDCON)
		17	PCA-1557756	
Y connector	For sensor 	20	PCA-1557785	Y connector (2 x M12 (5 pins)-M12 (5 pins)/SPEEDCON)
		21	PCA-1557798	Y connector (2 x M8 (3 pins)-M12 (4 pins)/SPEEDCON)

● Other M8/M12 Connector Accessories (EX500/EX250/EX9)

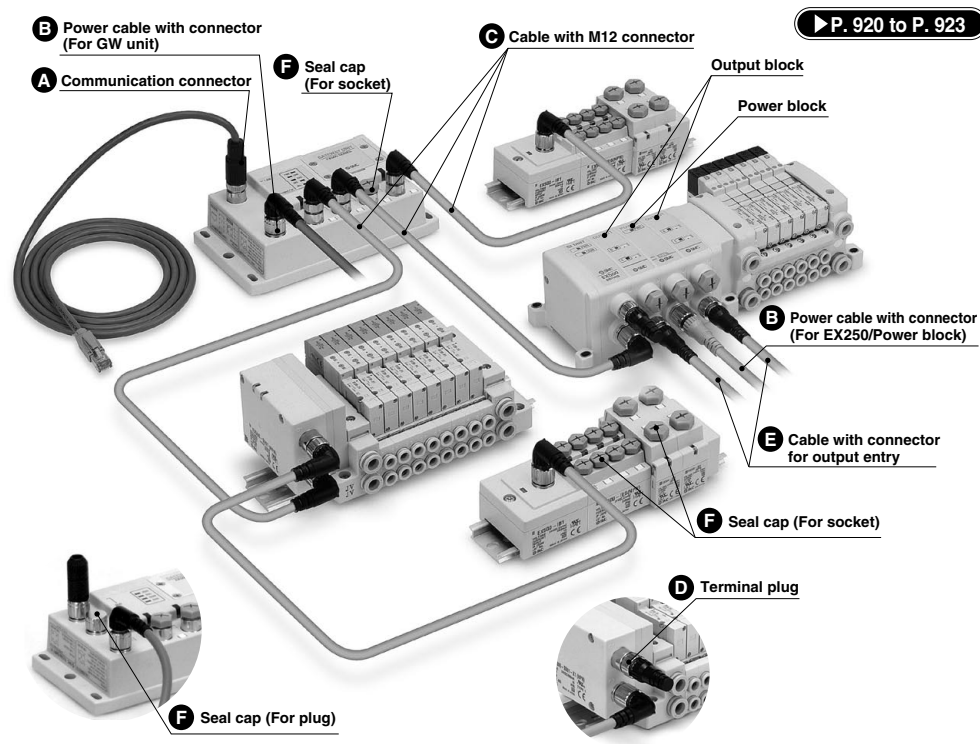

- | | | |
|--|---|---|
| <p>A Communication connector</p> <ul style="list-style-type: none"> • For DeviceNet™ (With cable) • For EtherNet/IP™ or EtherCAT (RJ45-M12, with cable) | <p>B Power cable with connector</p> <ul style="list-style-type: none"> • For GW unit (A-coded) • For EX250/Power block (B-coded) | <p>D Terminal plug (For EX500)</p> |
| <p>C Cable with M12 connector (For EX500)</p> | <p>E Cable with connector for output entry</p> | <p>F Seal cap</p> <ul style="list-style-type: none"> • For plug • For socket |

● Other M8/M12 Connector Accessories (EX500/EX250/EX9)

Description	Application	No.	SMC part no.	Name
Cable with connector	For Fieldbus communication	A	EX500-AC□□□-DN	Communication cable for DeviceNet™ (Socket)
			EX9-AC020EN-PSRJ	Communication cable for EtherNet/IP™ or EtherCAT (M12 plug/D-coded-RJ45)
	For power supply	B	EX500-AP□□□-S	Power cable with connector (Socket/A-coded)
			EX500-AP□□□-A	Power cable with connector (Socket/B-coded)
	For EX500	C	EX9-AC□□□-1	Power cable with connector (Socket/B-coded)
		C	EX500-AC□□□-SSPS	Cable with M12 connector (8 pins/Both straight)
			EX500-AC□□□-SAPA	Cable with M12 connector (8 pins/Both angle)
Terminal plug	For EX500	E	EX9-AC□□□-7	Cable with M12 connector (Plug/A-coded)
		D	EX500-AC000-S	Terminal plug (M12/8 pins)
Seal cap	For plug	F	EX500-AWTP	Seal cap (M12/For plug)
			EX9-AWES	Seal cap (M8/For socket)
			EX9-AWTS	Seal cap (M12/For socket)



I N D E X

Communication Cable/Connector

Example of Connection/Specifications

- CC-Link P.912
- DeviceNet™ P.913
- PROFIBUS DP P.914

Dimensions P.915

Between Sensor/Switch and Input Device

Example of Connection P.916

Specifications/Dimensions

- Fieldwireable connector P.917
- Cable with connector P.918
- Y connector P.919

Other Accessories

Example of Connection P.920

How to Order/Dimensions P.921

• Compatibility between Sensors and Fieldwireable Connectors P.925

• American Wire Gauge Conversion Table P.926

• Safety Instructions/Precautions P.927

EX12

EX140

EX180

EX260

EX250

EX600

EX500

EX510

PCA
EX


Communication Cable/Connector

M12




CC-Link

Example of Connection

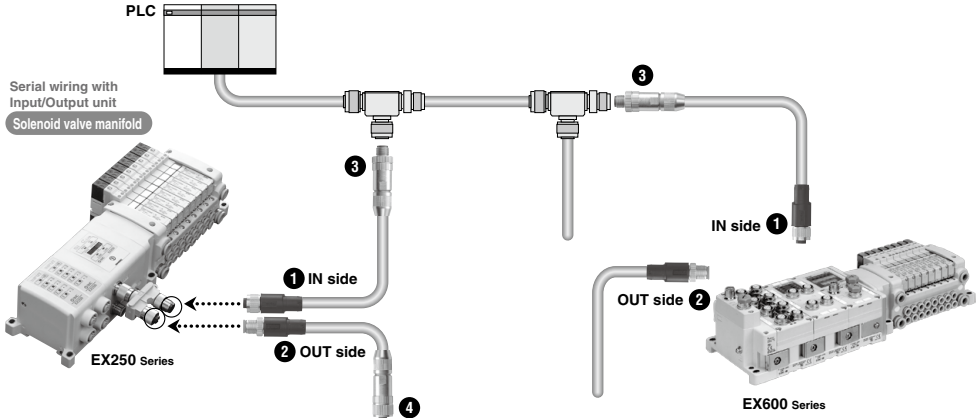

Specifications

Description		Communication cable (With one side connector)		Fieldwireable connector		
Part no.		PCA-1567720	PCA-1567717	PCA-1557617	PCA-1557620	
Product image						
		Socket	Plug	Plug	Socket	
Number of functional poles		M12: 4 poles				
Key type		A-coded (Normal key)				
Pin assignment				1: SLD (Shield wire) 2: DB (White) 3: DG (Yellow) 4: DA (Blue)		
		Plug, A-coded (Viewed from the plug/socket side)	Socket, A-coded (Viewed from the plug/socket side)			
Wiring Note	Fixed cable length	5 m		—		
	Cable O.D.	7.7 ±0.3 mm		Applicable cable	4.0 to 8.0 mm	
	Wire gauge (Stranded wire cross section)	0.5 mm²/AWG20			0.14 to 0.5 mm²/AWG26 to 20	
	Wire outer diameter (Including insulating material)	2.55 ±0.07 mm		—		
Connection type		—		Spring-cage connection		
Rating/Performance	Rated current		4 A			
	Rated voltage		250 V	48 V		
	Contact resistance		≤5 mΩ			
	Insulation resistance		≥100 MΩ			
	Withstand voltage		1.4 kV			
	Ambient temperature	Connector	-25 to 90°C		-40 to 85°C	
		Cable	Operating	-20 to 60°C		—
	Fixed		-20 to 60°C		—	
	Protection class		IP67 (Only with screw tightened)			
Allowable repeated insertion/withdrawal		200				
Cable retaining force		150 N/15 sec.		—		
Material	Material of knurl		Zinc die-cast	Brass		
	Contact (Surface treatment)		CuSn (Au plating (Ni plating))			
	Insulating material		Thermoplastic polyurethane (TPU)		Polyamide (PA6.6)	
	Material of sheath		Polyvinyl chloride (PVC)		—	
Weight		Approx. 306 g	Approx. 308 g	Approx. 48 g	Approx. 53 g	


Note) The shaded parts show the specifications for the applicable cable. Adaptation for the connector may vary on account of the conductor construction of the electric wire.

Communication Cable/Connector


M12



Example of Connection

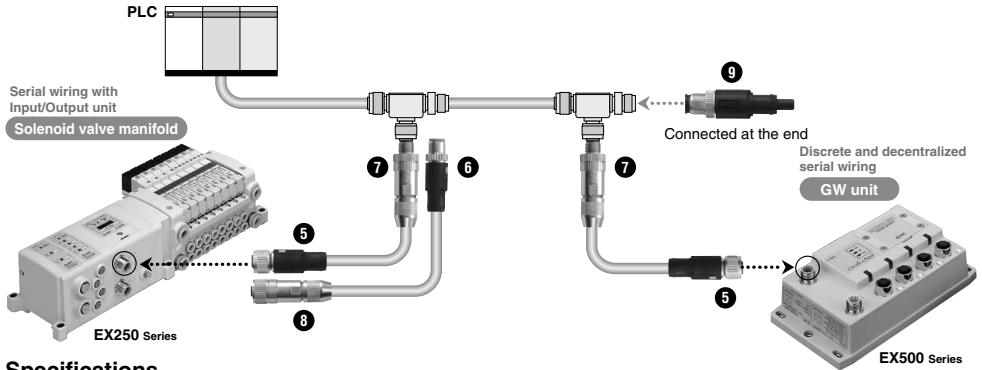

Specifications

Description			Communication cable (With one side connector)		Fieldwireable connector		Terminal plug	
Part no.			PCA-1557633	PCA-1557646	PCA-1557659	PCA-1557662	PCA-1557675	
Product image								
			Socket	Plug	Plug	Socket	For DeviceNet™ (Plug, A-coded)	
Number of functional poles			M12: 5 poles					
Key type			A-coded (Normal key)					
Pin assignment			 Plug, A-coded (Viewed from the plug/socket side)		 Socket, A-coded		DeviceNet™ / CANopen 1: DRAIN 1: — 2: V+ (Red) 2: — 3: V- (Black) 3: CAN GND 4: CAN H (White) 4: CAN H 5: CAN L (Blue) 5: CAN L	
Wiring (Note)	Fixed cable length		5 m		—			
	Cable O.D.		6.70 ±0.3 mm		Applicable cable	4.0 to 8.0 mm	—	
	Wire gauge (Stranded wire cross section)	Power pair	0.33 mm²/AWG22			0.14 to 0.5 mm²/AWG26 to 20	—	
		Data pair	0.2 mm²/AWG24					
	Wire outer diameter (Including insulating material)	Power pair	1.4 ±0.05 mm			—		
		Data pair	2.05 ±0.10 mm		—			
Connection type			—		Spring-cage connection		—	
Rating/Performance	Rated current		4 A				—	
	Rated voltage		48 V				—	
	Contact resistance		≤5 mΩ				—	
	Insulation resistance		≥100 MΩ				—	
	Withstand voltage		1.0 kV				—	
	Ambient temperature	Connector	-25 to 90°C		-40 to 85°C		-25 to 90°C	
		Cable	Operating	-20 to 75°C		—		—
	Fixed		-40 to 80°C		—		—	
	Protection class			IP67 (Only with screw tightened)				—
	Allowable repeated insertion/withdrawal			200				—
Cable retaining force			150 N/15 sec.		—		—	
Material	Material of knurl		Zinc die-cast		Brass		Zinc die-cast	
	Contact (Surface treatment)		CuSn (Au plating (Ni plating))				—	
	Insulating material		Thermoplastic polyurethane (TPU)		Polyamide (PA6.6)		Thermoplastic polyurethane (TPU)	
Material of sheath			Polyurethane (PUR)		—		—	
Weight			Approx. 308 g	Approx. 306 g	Approx. 47 g	Approx. 53 g	Approx. 12 g	

(Note) The shaded parts show the specifications for the applicable cable. Adaptation for the connector may vary on account of the conductor construction of the electric wire.


Communication Cable/Connector

M12



PROFI
BUS

Example of Connection

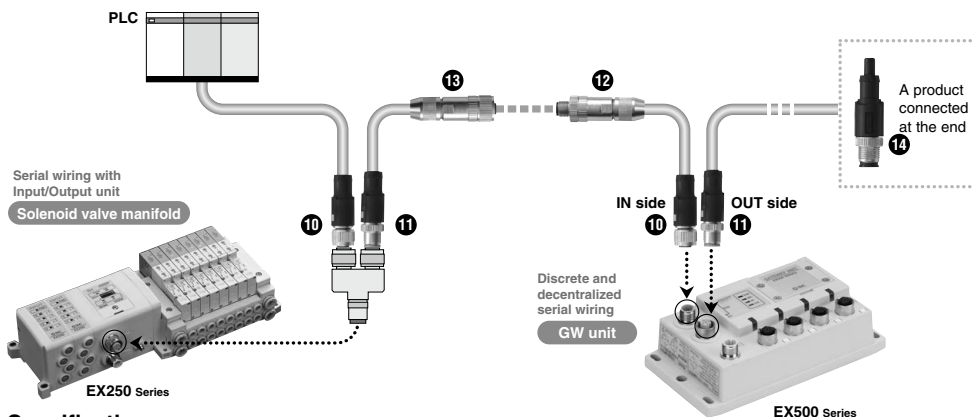

Specifications

Description		Communication cable (With one side connector)		Fieldwireable connector		Terminal plug	
Part no.		PCA-1557688	PCA-1557691	PCA-1557701	PCA-1557714	PCA-1557727	
Product image							
		Socket	Plug	Plug	Socket		
Number of functional poles		M12: 2 poles		M12: 3 poles		M12: 4 poles	
Key type		B-coded (Reverse key)					
Pin assignment		 Plug, B-coded Plug, B-coded (Viewed from the plug/socket side)				1: — 2: A Line (Green) 3: — 4: B Line (Red) 5: —	1: VP 4: B Line 2: A Line 3: DGND
Wiring Note	Fixed cable length	5 m		—			
	Cable O.D.	7.80 ±0.2 mm		Applicable cable	4.0 to 8.0 mm	—	
	Wire gauge (Stranded wire cross section)	0.34 mm²/AWG22			0.14 to 0.5 mm²/AWG26 to 20	—	
	Wire outer diameter (Including insulating material)	2.55 ±0.07 mm		—			
Connection type		—		Spring-cage connection		—	
Rating/Performance	Rated current		4 A		—		
	Rated voltage		60 V		48 V	60 V	
	Contact resistance		≤5 mΩ				
	Insulation resistance		≥100 MΩ				
	Withstand voltage		1.4 kV				
	Ambient temperature	Connector	-25 to 90°C		-40 to 85°C		
		Cable	Operating	-20 to 80°C		—	
			Fixed	-40 to 85°C		—	
	Protection class		IP67 (Only with screw tightened)				
	Allowable repeated insertion/withdrawal		200				
Cable retaining force		150 N/15 sec.		—			
Material	Material of knurl		Zinc die-cast		Brass	Zinc die-cast	
	Contact (Surface treatment)		CuSn (Au plating (Ni plating))				
	Insulating material		Polyamide (PA6.6)				
	Material of sheath		Polyurethane (PUR)				
Weight		Approx. 343 g	Approx. 356 g	Approx. 48 g	Approx. 54 g	Approx. 12 g	




(Note) The shaded parts show the specifications for the applicable cable. Adaptation for the connector may vary on account of the conductor construction of the electric wire.

Dimensions



Communication cable (With one side connector)

CC-Link

- 1 PCA-1567720**
For CC-Link
(Socket)






- 2 PCA-1567717**
For CC-Link
(Plug)





DeviceNet™

- 5 PCA-1557633**
For DeviceNet™
(Socket)






- 6 PCA-1557646**
For DeviceNet™
(Plug)





PROFIBUS®

- 10 PCA-1557688**
For PROFIBUS DP
(Socket)



- 11 PCA-1557691**
For PROFIBUS DP
(Plug)



Fieldwireable connector

Plug

- 3 PCA-1557617**
For CC-Link




A-coded
(Normal key)



B-coded
(Reverse key)

- 7 PCA-1557659**
For DeviceNet™

- 12 PCA-1557701**
For PROFIBUS DP



Socket

- 4 PCA-1557620**
For CC-Link




A-coded
(Normal key)

- 8 PCA-1557662**
For DeviceNet™



B-coded
(Reverse key)


- 13 PCA-1557714**
For PROFIBUS DP



Terminal plug


DeviceNet™

- 9 PCA-1557675**
Terminating resistor
for DeviceNet™



PROFIBUS®

- 14 PCA-1557727**
Terminating resistor
for PROFIBUS DP



Between Sensor/Switch and Input Device

Example of Connection

1 Sensor with pre-wired connector Direct connection between connectors



Cable with connector

► P.918



Input block

Input unit manifold
• EX500 series




• EX500-IE3, 4



• EX500-IE1, 2
• EX500-IE5, 6

2 Sensor with lead wire entry Lead wire → M8/M12 connector conversion



Fieldwireable connector

► P.917

M12 SPEEDCON




"QUICKON-ONE" connection



Fieldwireable connection



M12 SPEEDCON



Manifold solenoid valve with input unit
• EX250 series




• EX250-IE1, 2



• EX250-IE3

3 Auto switch with pre-wired connector



M8/M12 connector
(Fieldwireable/Pre-wired)


Pre-wired type

* Can be wired to the input block after converting 1-output signal to 2-output signal. (M12 only)


Y connector

► P.919

M12 SPEEDCON



M12 SPEEDCON



M12 SPEEDCON



Fieldwireable connector

► P.917

M12 SPEEDCON




"QUICKON-ONE" connection



Fieldwireable connection



4 Auto switch with lead wire entry Lead wire → M8/M12 connector conversion



* Cut the cable into the necessary length, and wire with fieldwireable connectors.

Between Sensor/Switch and Input Device

Fieldwireable Connector

Specifications


Part no.		PCA-1557730	PCA-1557743	PCA-1557756
Product image/Pin assignment		15 M8  Plug	16 M12 SPEEDCON  Plug	17 M12 SPEEDCON  Plug
		Number of functional poles		
Key type		M8: 3 poles	M12: 4 poles	
		—	A-coded (Normal key)	
Wiring (Note)	Applicable cable	3.0 to 5.0 mm	3.5 to 6.0 mm	4.0 to 8.0 mm
	Wire gauge (Stranded wire cross section)	0.14 to 0.25 mm ² /AWG26 to 24 0.25 to 0.34 mm ² /AWG24 to 22	0.14 to 0.34 mm ² /AWG26 to 22	0.34 to 0.75 mm ² /AWG22 to 18
	Core wire diameter (Including insulating material)	1.0 to 1.6 mm	0.7 to 1.3 mm	1.3 to 2.5 mm
Connection type		Piercecon® connection	QUICKON-ONE connection	
Rated current		4 A		
Rated voltage		60 V	250 V	
Contact resistance		≤5 mΩ		
Insulation resistance		≥100 MΩ		
Withstand voltage		1.0 kV	1.4 kV	
Ambient temperature		−40 to 85°C	−25 to 80°C	
Protection class		IP67 (Only with screw tightened)		
Allowable repeated insertion/withdrawal		100	200	
Allowable number of repeated connection between conductors of the same cross section		10		
Material	Material of knurl	Brass	Zinc die-cast	
	Contact (Surface treatment)	CuZn (Au plating (Ni plating))		
	Insulating material	Polyamide (PA6.6)		
Weight		Approx. 14 g	Approx. 13 g	Approx. 15 g

Note) The shaded parts show the specifications for the applicable cable. Adaptation for the connector may vary on account of the conductor construction of the electric wire.


Dimensions

15 PCA-1557730

Fieldwireable connector (M8)




Plug connector
pin assignment




Wiring

16 PCA-1557743

Fieldwireable connector (M12)

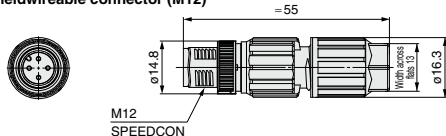


Plug connector
pin assignment
A-coded (Normal key)




Wiring

17 PCA-1557756

Fieldwireable connector (M12)

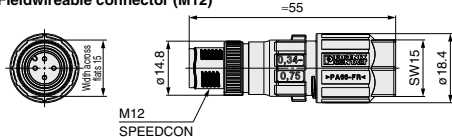

Plug connector
pin assignment
A-coded (Normal key)



Wiring

Between Sensor/Switch and Input Device


Cable with Connector

Specifications


Part no.		PCA-1557769	PCA-1557772
Product image		18 M12   SPEEDCON	19 M8  
Number of functional poles		M12: 4 poles	M8: 3 poles
Key type		A-coded (Normal key)	—
Wiring	Fixed cable length		3 m
	Cable O.D.		4.7 ±0.15 mm
	Wire gauge (Stranded wire cross section)		0.34 mm²/AWG22
Rating/Performance	Rated current		4 A
	Rated voltage		250 V
	Contact resistance		≤5 mΩ
	Insulation resistance		≥100 MΩ
	Withstand voltage		1.4 kV
	Ambient temperature	Connector	−25 to 90°C
		Operating	−5 to 80°C
	Cable	Fixed	−40 to 80°C
		Protection class	
	Allowable repeated insertion/withdrawal		200
Cable retaining force		150 N/15 sec.	
Material	Material of knurl		Zinc die-cast
	Contact (Surface treatment)		CuSn (Au plating (Ni plating))
	Insulating material		Thermoplastic polyurethane (TPU)
	Material of sheath		Polyurethane Black (PUR Black)
Weight		Approx. 111 g	Approx. 80 g

Dimensions

18 PCA-1557769
Cable with M12 connector (4 poles)

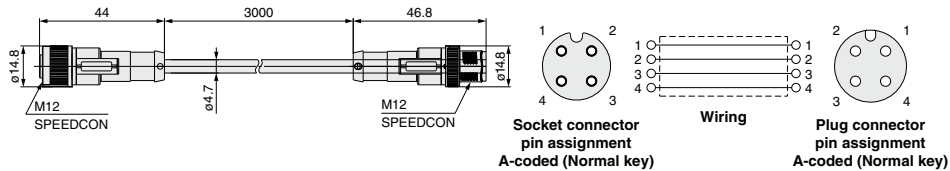

19 PCA-1557772
Cable with M8 connector (3 poles)

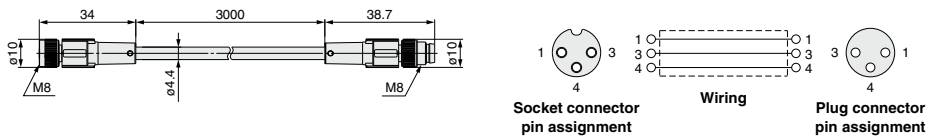

Between Sensor/Switch and Input Device


Y Connector

Specifications


Part no.	PCA-1557785	PCA-1557798
Product image		
Number of functional poles	2 x M12: 5 poles – M12: 5 poles	2 x M8: 3 poles – M12: 4 poles
Key type	A-coded (Normal key)	
Rated current	4 A	
Rated voltage	60 V	
Contact resistance	≤ 5 mΩ	
Insulation resistance	≥ 100 MΩ	
Withstand voltage	1.0 kV	
Ambient temperature	–25 to 90°C	
Protection class	IP67 (Only with screw tightened)	
Allowable repeated insertion/withdrawal	200	
Material	Zinc die-cast	
Contact (Surface treatment)	CuZn (Au plating (Ni plating))	
Insulating material	Thermoplastic polyurethane (TPU)	
Weight	Approx. 29 g	Approx. 13 g

Dimensions


20 PCA-1557785
Y connector
(2 x M12-M12)

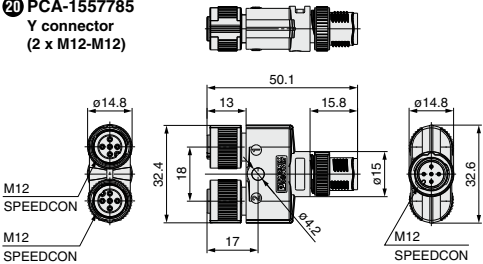


Socket connector
pin assignment
A-coded (Normal key)

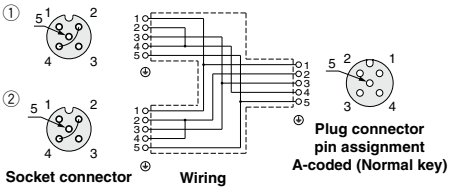

21 PCA-1557798
Y connector
(2 x M8-M12)

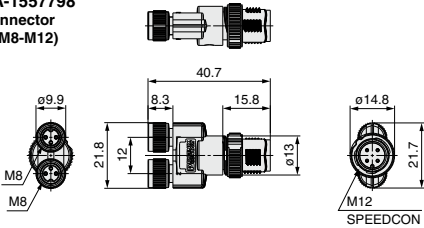


Socket connector
pin assignment
A-coded (Normal key)

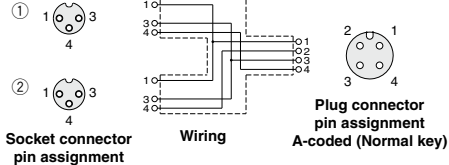

Other Accessories

M8/M12 Connector Accessories (EX500/EX250/EX9)

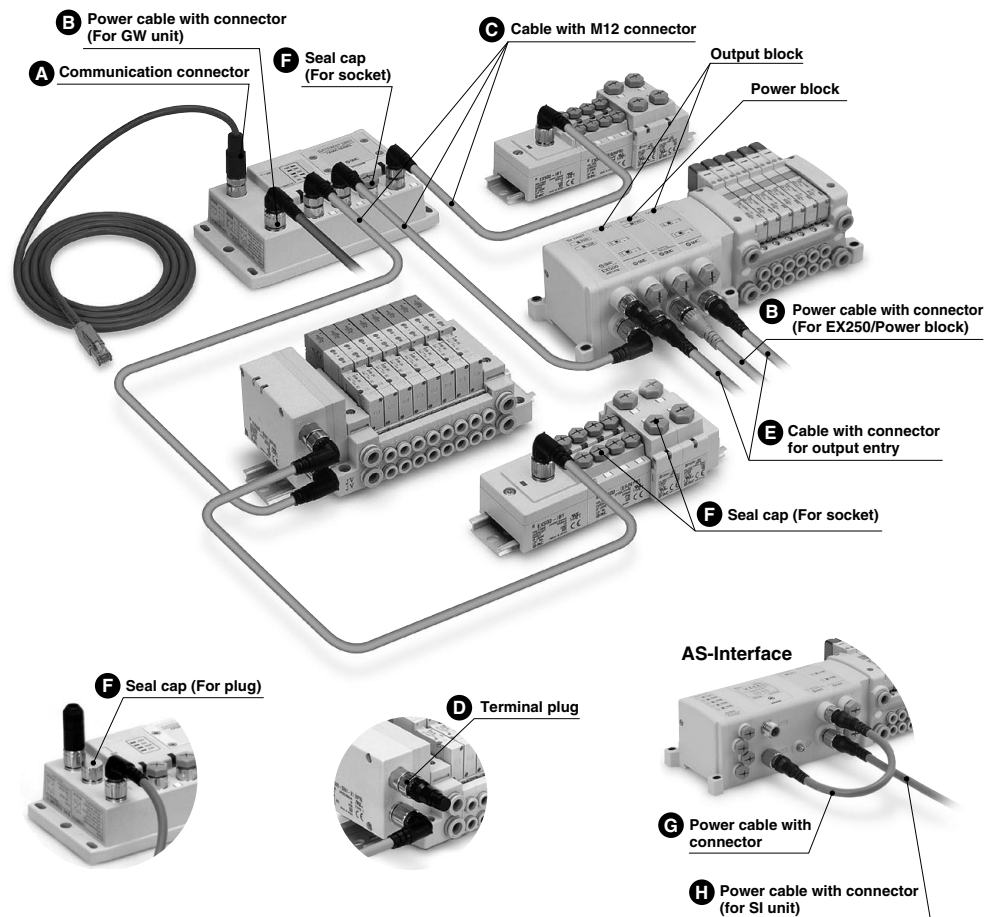

A Communication connector

- For DeviceNet™ (with cable)
- For EtherNet/IP™ or EtherCAT (RJ45-M12, with cable)

B Power cable with connector

- For GW unit (A-coded)
- For EX250/Power block (B-coded)

C Cable with M12 connector (For EX500)

D Terminal plug (For EX500)

E Cable with connector for output entry

F Seal cap

- For plug
- For socket

G Power cable with connector

H Power cable (for SI unit)


A Communication connector

For DeviceNet™

EX500-AC 050 -DN

Cable length (L)

010	1000 [mm]
050	5000 [mm]

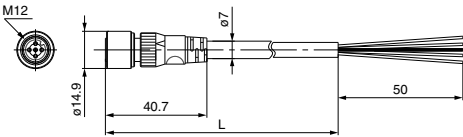

Terminal no.

Core wire colors



Socket connector pin arrangement



Wiring

Red: V+
Black: V-
White: CAN H
Blue: CAN L

For EtherCAT or PROFINET SI unit


EX9-AC 020 EN -PSRJ

Cable length (L)

010	1000 [mm]
020	2000 [mm]
030	3000 [mm]
050	5000 [mm]
100	10000 [mm]

Connector specification

PSRJ M12 plug (Straight)
⇔ RJ-45 connector




Plug connector pin arrangement
D-coded



Terminal no.

Core wire colors

1 White
2 Orange
3 White
4
5 Green
6
7
8
Shield



Plug connector pin arrangement

Wiring (Straight cable)

B Power cable with connector (For GW unit, SI unit (A-coded))

EX500-AP 050 -S


Cable length (L)

010	1000 [mm]
050	5000 [mm]

Connector specification

S	Straight
A	Angle

Straight connector type

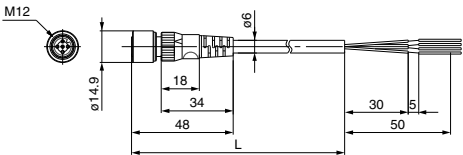

Terminal no.

Core wire colors




Socket connector pin arrangement



Wiring

Brown
White
Blue
Black
Gray

Angle connector type

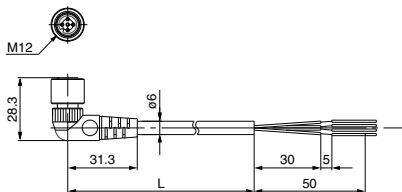

Socket connector pin arrangement

Terminal no.

Core wire colors



Wiring

Brown
White
Blue
Black
Gray

Other Accessories


M8/M12 Connector Accessories (EX500/EX250/EX9)

Power cable with connector (For EX250/Power block (B-coded))

EX9 – AC 050 – 1

Cable length (L)

010	1000 [mm]
030	3000 [mm]
050	5000 [mm]

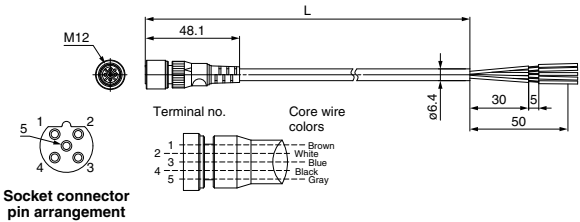

Cable with M12 connector

EX500 – AC 030 – SSPS


Cable length (L)

003	300 [mm]
005	500 [mm]
010	1000 [mm]
030	3000 [mm]
050	5000 [mm]


Connector specification

SSPS	Socket side: Straight, Plug side: Straight
SAPA	Socket side: Angle, Plug side: Angle

Straight connector type

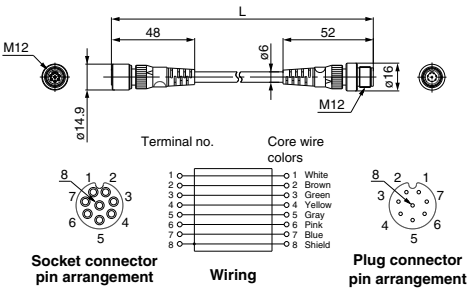


Angle connector type

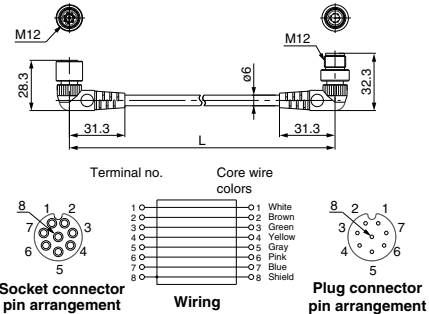

Terminal plug

This is used where an input unit manifold (input unit/input block) is not being used.
(If a terminal plug is not used, the GW unit's COM LED will not light up.)

EX500 – AC000 – S

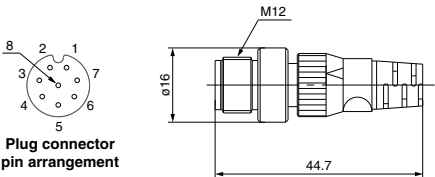


③ Cable with connector for output entry

EX9 – AC 030 – 7

Cable length (L)


010	1000 [mm]
030	3000 [mm]

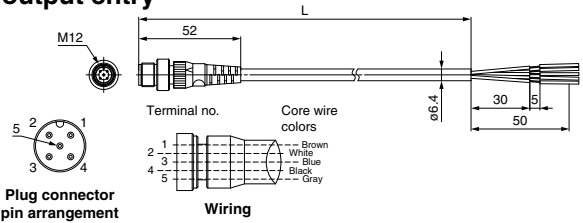

④ Seal cap: M12 connector (For plug)

Use this on ports that are not being used for a M12 connector (plug). Use of this waterproof cap maintains the integrity of the enclosure.
Note) Tighten the waterproof cap with the prescribed tightening torque. (For M12: 0.1 N·m)

EX500 – AWTP




④ Seal cap: M8, M12 connector (For socket)/Accessories

Use this on ports that are not being used for a M8, M12 connector (socket). Use of this waterproof cap maintains the integrity of the enclosure. (Waterproof cap is packed together with each unit.)
Note) Tighten the waterproof cap with the prescribed tightening torque. (For M8: 0.05 N·m, For M12: 0.1 N·m)

EX9 – AW

Connector type

ES	M8 connector (For socket, 10 pcs.)
TS	M12 connector (For socket, 10 pcs.)

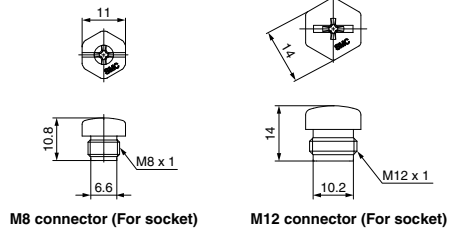

EX12
EX140
EX180
EX260
EX250
EX600
EX500
EX510
PCA
EX

Other Accessories

M8/M12 Connector Accessories (EX500/EX250/EX9)

Power cable with connector


Connects between the power supply connector for the power block and the SI unit power supply connector, bridging the external power supply, which is supplied with the power block, to the SI unit.

EX9-AC002-2


SI unit type

2	EX250-SDN1 EX250-SMJ2 EX250-SCA1A	Compliant
3	EX250-SPR1 EX250-SEN1	
4	EX250-SAS3/5	Compliant


EX9-AC002-2

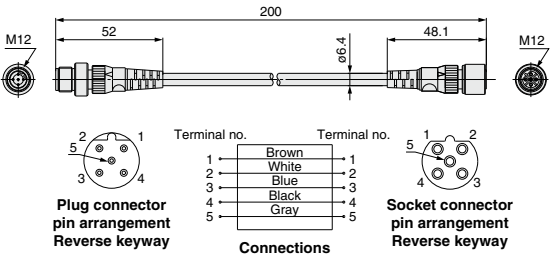

EX9-AC002-3

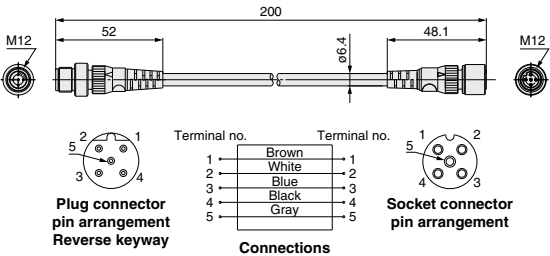

EX9-AC002-4

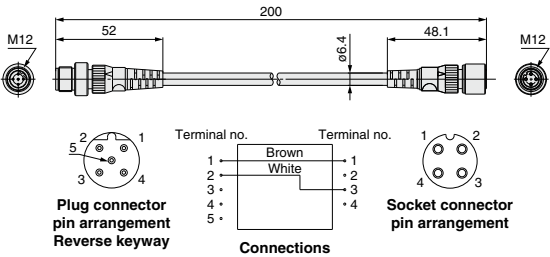


AS-Interface power cable

Cable connecting between AS-Interface power supply line (for external devices) branch connector (M12) and the power block's power supply input connector.

EX9-AC010-5

Cable length (L)

010	1000 [mm]
030	3000 [mm]
050	5000 [mm]

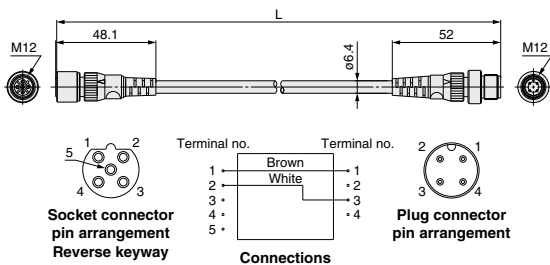

Compatibility between Sensors and Fieldwireable Connectors

●: Applicable

▲: Applicable, but number of electric wire cores is limited.

(Number of sensor lead wire cores is larger than the number of connector pins.)

△: Connectable, but may not correspond to IP65/67 depending on installation method.

×: Non-conformance

Pressure Switch

Model	Cable part no.	Number of cores	Applicable connector			Cable specifications						Note	
			M8	M12		Sheath		Insulator		Conductor			
			15	16	17	O.D.	Material	O.D.	Material	Nominal cross section	O.D.		Strand diameter
Z/ISE30A-□	ZS-38-4□	4	●	●	×	ø3.5	PVC	ø1.0	PVC	0.20 mm ² (AWG26)	ø0.58	0.08 mm	
	ZS-38-3□	3											
ISE35-□	ZS-32-A-□	3	●	●	×	ø3.4	PVC	ø1.1	PVC	0.20 mm ² (AWG25)	ø0.58	0.08 mm	
Z/ISE40A□-□	Integrated type	5	▲	▲	×	ø3.5	PVC	ø0.95	PVC	0.15 mm ² (AWG26)	ø0.51	0.08 mm	
ISE70/75(H)-□	ZS-31-B	4	▲	●	×	ø4.0	PVC	ø1.14	PVC	0.30 mm ² (AWG23)	ø0.72	0.08 mm	Straight
	ZS-31-C		▲	●	×								Angle
Z/ISE80□-□	Integrated type	5	▲	▲	×	ø3.5	PVC	ø0.95	PVC	0.15 mm ² (AWG26)	ø0.51	0.08 mm	
		4	▲	●	×								
		3	●	●	×								
ISA2-□	ISA-8-A	4	×	×	●	ø6.0	PVC	ø1.72	PVC	0.53 mm ² (AWG21)	ø0.9	0.18 mm	Straight
	ISA-8-B		×	×	●								Angle

Flow Switch

Model	Cable part no.	Number of cores	Applicable connector			Cable specifications						Note	
			M8 M12			Sheath		Insulator		Conductor			
			15	16	17	O.D.	Material	O.D.	Material	Nominal cross section	O.D.	Strand diameter	
PF2A7□ PF2W7□	ZS-37-A	4	▲	●	×	ø4.0	PVC	ø1.14	PVC	AWG23	ø0.72	0.08 mm	Straight
	ZS-37-B		▲	●	×								Angle
PFM7□	ZS-33-D	4	▲	●	×	ø3.5	PVC	ø1.00	PVC	AWG26	ø0.50	0.08 mm	

Note) Information on cable specifications is based on specification sheets supplied by the manufacturer.

EX1□

EX140

EX180

EX260

EX250

EX600

EX500

EX510

PCA
EX□

American Wire Gauge Conversion Table

This table shows to change American wire gauge (AWG) into a diameter.

The wire material is indicated as AWG (American wire gauge) in the documentations overseas.

Use the following table for conversion into diameter.

Wire size (AWG)	Diameter (mm)	Cross section (mm ²)
1	7.348	42.3846
2	6.543	33.6065
3	5.827	26.6538
4	5.189	21.1367
5	4.62	16.7554
6	4.115	13.2926
7	3.665	10.5443
8	3.264	8.3632
9	2.906	6.6292
10	2.588	5.2577
11	2.304	4.1671
12	2.052	3.3054
13	1.829	2.6260
14	1.628	2.0806
15	1.45	1.6505
16	1.29	1.3063

Wire size (AWG)	Diameter (mm)	Cross section (mm ²)
17	1.151	1.0400
18	1.024	0.8231
19	0.912	0.6529
20	0.813	0.5189
21	0.724	0.4115
22	0.643	0.3246
23	0.574	0.2586
24	0.511	0.2050
25	0.455	0.1625
26	0.404	0.1281
27	0.361	0.1023
28	0.32	0.0804
29	0.287	0.0647
30	0.254	0.0506
31	0.226	0.0401
32	0.203	0.0323

Wire size (AWG)	Diameter (mm)	Cross section (mm ²)
33	0.18	0.0254
34	0.16	0.0201
35	0.142	0.0158
36	0.127	0.0127
37	0.114	0.0102
38	0.102	0.0082
39	0.089	0.0062
40	0.079	0.0049
41	0.071	0.0040
42	0.064	0.0032
43	0.056	0.0025
44	0.051	0.0020
45	0.045	0.0016
46	0.04	0.0013



Cable/Connector Accessories Precautions

Be sure to read this before handling the products.


Wiring

⚠ Caution

1. Do not lay the wires while they are energized. It may give you an electric shock.
2. It should be cabled according to the connection diagram.
3. Check if it can be connected when using a sensor or switch.
4. When the cable sheath is stripped, confirm the stripping direction.

(For SMC switches with oblong cables)

The insulator may be split or damaged depending on the direction.



Tightening of Screw

⚠ Caution

1. It cannot maintain the enclosure (IP6○) or the screws may be loosened if they are not tightened sufficiently.
2. Check that they are tightened enough at appropriate intervals during the operation.

Connection and Disconnection of Connector

⚠ Caution

1. Be sure to turn the power off when connecting and disconnecting the connectors.
2. Do not touch surface of the engagement with wet hands.
3. Do not pull the cable out by holding the cable.
4. Note the key direction.

Especially for the SPEEDCON specifications, match the protrusion of the knurl (bracket) and the mark at the mold for insertion so that the SPEEDCON function can be maintained.

5. When engaging the connectors, insert the connectors enough until all the engagement surfaces can be hidden and tighten the screws not to damage the thread ridges.

Handling of Cable with Connector

⚠ Caution

1. Avoid repeatedly bending or stretching the cable and applying a heavy object or force to it.
2. Set up the cables to the place where they cannot be stepped on in order to prevent them being broken or damage to the connectors.

Install a protective cover in case it is used in the place stated above.

3. Do not pull the connector or cable unnecessarily. It may damage the connectors or break the cables.
4. Do not bend the cable at the root of the connector when installed.

Handling of Fieldwireable Connector

⚠ Caution

Common Precautions

1. Follow "Assembly Procedure" provided by SMC. If not, it may not maintain IP65/67.
2. Do not use it besides an original purpose.
3. This connector may only be operated when under no load.
4. The work by the wet hand causes the electric shock.
5. Never perform the repair.

Spring-cage Connection

1. Do not use it besides an original purpose.
2. This connector may only be operated when under no load.
3. The work by the wet hand causes the electric shock.
4. Never perform the repair.

QUICKON-ONE Connection

1. Connection between cables (with the same material and the same cross section) is 10 times at max.
2. PVC or PE is suitable for sheath material, however fluoro resin is not suitable for sheath material.
3. Only for flexible cable, not for solid cable.
4. When you remove the cable, pull the cable. However, if you remove the Cable gland, cable and the Splice ring remain to the body.

When you connect the cable again, screw the Splice ring approx. two turns into the Cable gland before using.

5. When you connect the cable again, cut and strip the cable.

Piercecon® Connection

1. Connection between cables (with the same material and the same cross section) is 10 times at max.
2. Only for flexible cable, not for solid cable.
3. If you connect the cable again, cut and strip the cable.

Operating Environment

⚠ Caution

1. Do not use in the atmosphere and environment over the rated specifications.
2. Do not use in the environment of corrosive gas or liquid splash.
3. Do not use in an environment where oil and chemicals are used.

Maintenance

⚠ Caution

1. Perform periodic inspection.

EX12□

EX140

EX180

EX260

EX250

EX600

EX500

EX510

PCA

EX□