



Main

Range of product	Modicon Quantum automation platform
Product or component type	Power supply module
Power supply type	Summable or standalone

Complementary

Input voltage	230 V AC 170...276 V 115 V AC 93...132 V 47...63 Hz
Input current	750 mA 230 V 1300 mA 115 V
Inrush current	38 A 115 V 19 A 230 V
Rated power in VA	130 VA
Associated fuse rating	2 A slow-blow
Harmonic distortion	<= 10 % of fundamental rms value
Output voltage	5.1 V DC
Power supply output current	20 A 60 °C summable 11 A 60 °C standalone
Output overvoltage protection	Internal
Output overload protection	Internal
Power dissipation	6 + (1.5 x Iout) where Iout is in A
Alarm output	1 NC 6 A 220 V power supply fault
Local signalling	1 LED green power (PWR OK)
Marking	CE
Module format	Standard
Product weight	0.65 kg

Environment


Protective treatment	Conformal coating Humiseal 1A33
Standards	CSA C22.2 No 142 UL 508
Product certifications	CUL
Resistance to electrostatic discharge	8 kV on air conforming to IEC 801-2 4 kV contact conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Contractual warranty

Period	18 months
--------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

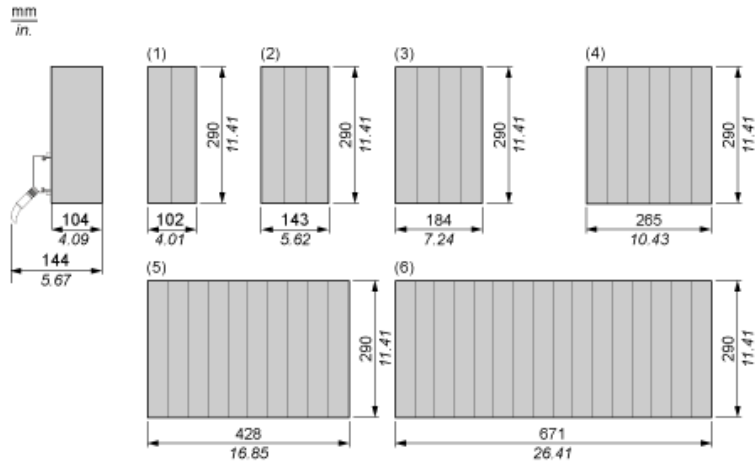

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

115/230 Vac, 11 A Summable Power Supply Module

Wiring Diagram



NOTE: A normally closed relay contact rated at 220 Vac, 6 A / 30 Vdc, 5 A is available on terminals 1 and 2 of the power terminal strip. This contact set may be used to signal input power OFF.