

Head for selector switch, Harmony XB5, black handle, 22mm, 3 positions, spring return, set of 100

ZB5AD5TQ

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Harmony XB5			
Product or Component Type	Head for selector switch			
Device short name	ZB5			
Bezel material	Dark grey plastic			
Mounting diameter	0.9 in (22 mm)			
Sale per indivisible quantity	100			
Shape of signaling unit head	Round			
Type of operator	To centre spring return			
Operator profile	Black standard handle			
Operator position information	3 positions +/- 45°			

Complementary

CAD overall width	1.1 in (29 mm)			
CAD overall height	1.1 in (29 mm)			
CAD overall depth	1.8 in (46 mm)			
Mechanical durability	1000000 cycles			
Station name	XALD 15 cut-outs			
Electrical composition code	C3 6 single front mounting C4 6 single and double front mounting C5 5 single front mounting C6 5 single and double front mounting C7 4 single front mounting C8 4 single and double front mounting C11 3 single front mounting SF1 3 single front mounting SR1 3 single rear mounting			

Environment

Protective treatment	тн				
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)				
Ambient air temperature for operation	-40158 °F (-4070 °C)				
Overvoltage category	Class II conforming to IEC 60536				
IP degree of protection	IP67 IEC 60529 IP69 IEC 60529 IP69K				
NEMA degree of protection	NEMA 13 NEMA 4X				

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Resistance to high pressure washer	1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m			
IK degree of protection	IK06 conforming to IEC 50102			
Standards	CSA C22.2 No 14 IEC 60947-5-1 UL 508 JIS C8201-5-1 IEC 60947-5-4 IEC 60947-1 JIS C8201-1			
Product Certifications	DNV CSA BV LROS (Lloyds register of shipping) UL Listed			
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6			
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27			

Ordering and shipping details

Category	US10CS222467
Discount Schedule	0CS2
GTIN	3389110884616
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.30 in (3.3 cm)
Package 1 Width	2.05 in (5.2 cm)
Package 1 Length	2.13 in (5.4 cm)
Package 1 Weight	0.6 oz (18.0 g)
Unit Type of Package 2	S01
Number of Units in Package 2	100
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	5.91 in (15.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	4.442 lb(US) (2.015 kg)

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∇ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

○ Repack and remanufacture					
Circularity Profile	End of Life Information				
Take-back	No				

ZB5AD5TQ

Dimensions Drawings

Dimensions




ZB5AD5TQ

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

				•
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

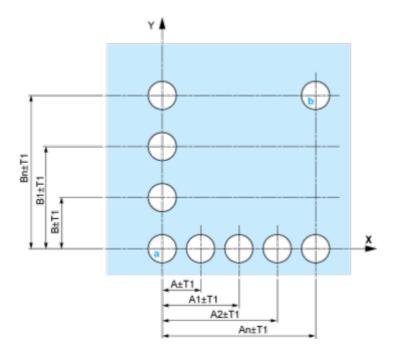


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

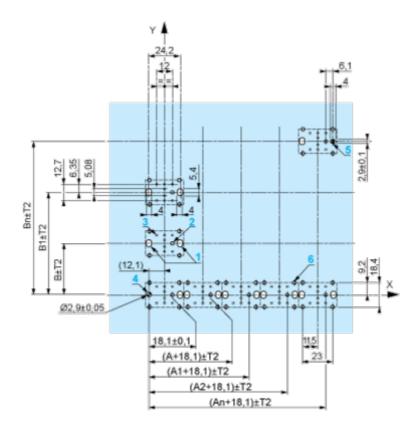

A: 30 mm min. B: 40 mm min. Dimensions in in.

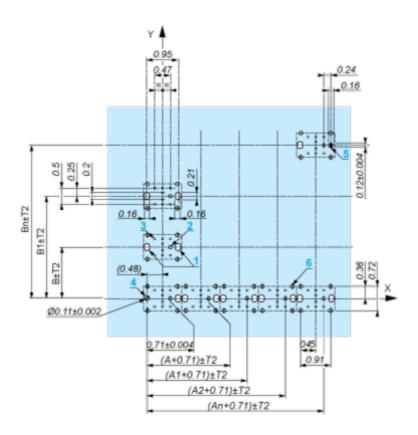

A: 1.18 in. min. **B:** 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked ${\bf a}$ and ${\bf b}$ are diagonally opposed and must align with those marked ${\bf 4}$ and ${\bf 5}$.



ZB5AD5TQ

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- $_{\bullet}$ 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01 $\!\!^{\bullet}$
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ01•.


ZB5AD5TQ


Technical Description







ZB5AD5TQ





ZB5AD5TQ





ZB5AD5TQ

Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Electrical Composition Corresponding to Code C15

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



		Тор			
Push Bottom					
	Location		Left	Centre	Right
	State		1	1	0
011-	N/O		closed closed		open
Contacts	N/C		open	open	closed

Position 0°



Posit	Position	Тор				
	T GSILLOTT	Bottom			\triangle	
	Location		Left	Centre	Right	
	State		0	0	0	
Contacts	N/O		open	open	open	
Contacts	N/C		closed	closed	closed	

Position 45°

ZB5AD5TQ




Push	Position	Тор			
		Bottom			
	Location		Left	Centre	Right
	State		0	1	1
Contacts	N/O		open	closed	closed
	N/C		closed	open	open

ZB5AD5TQ

Technical Illustration

Dimensions

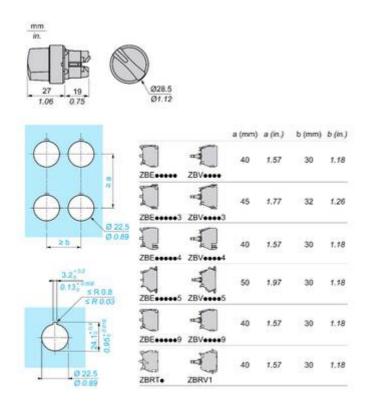

20

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XB5



Offer Marketing Illustration

Product benefits / Features



Image of product / Alternate images

Alternative











