


Sep.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

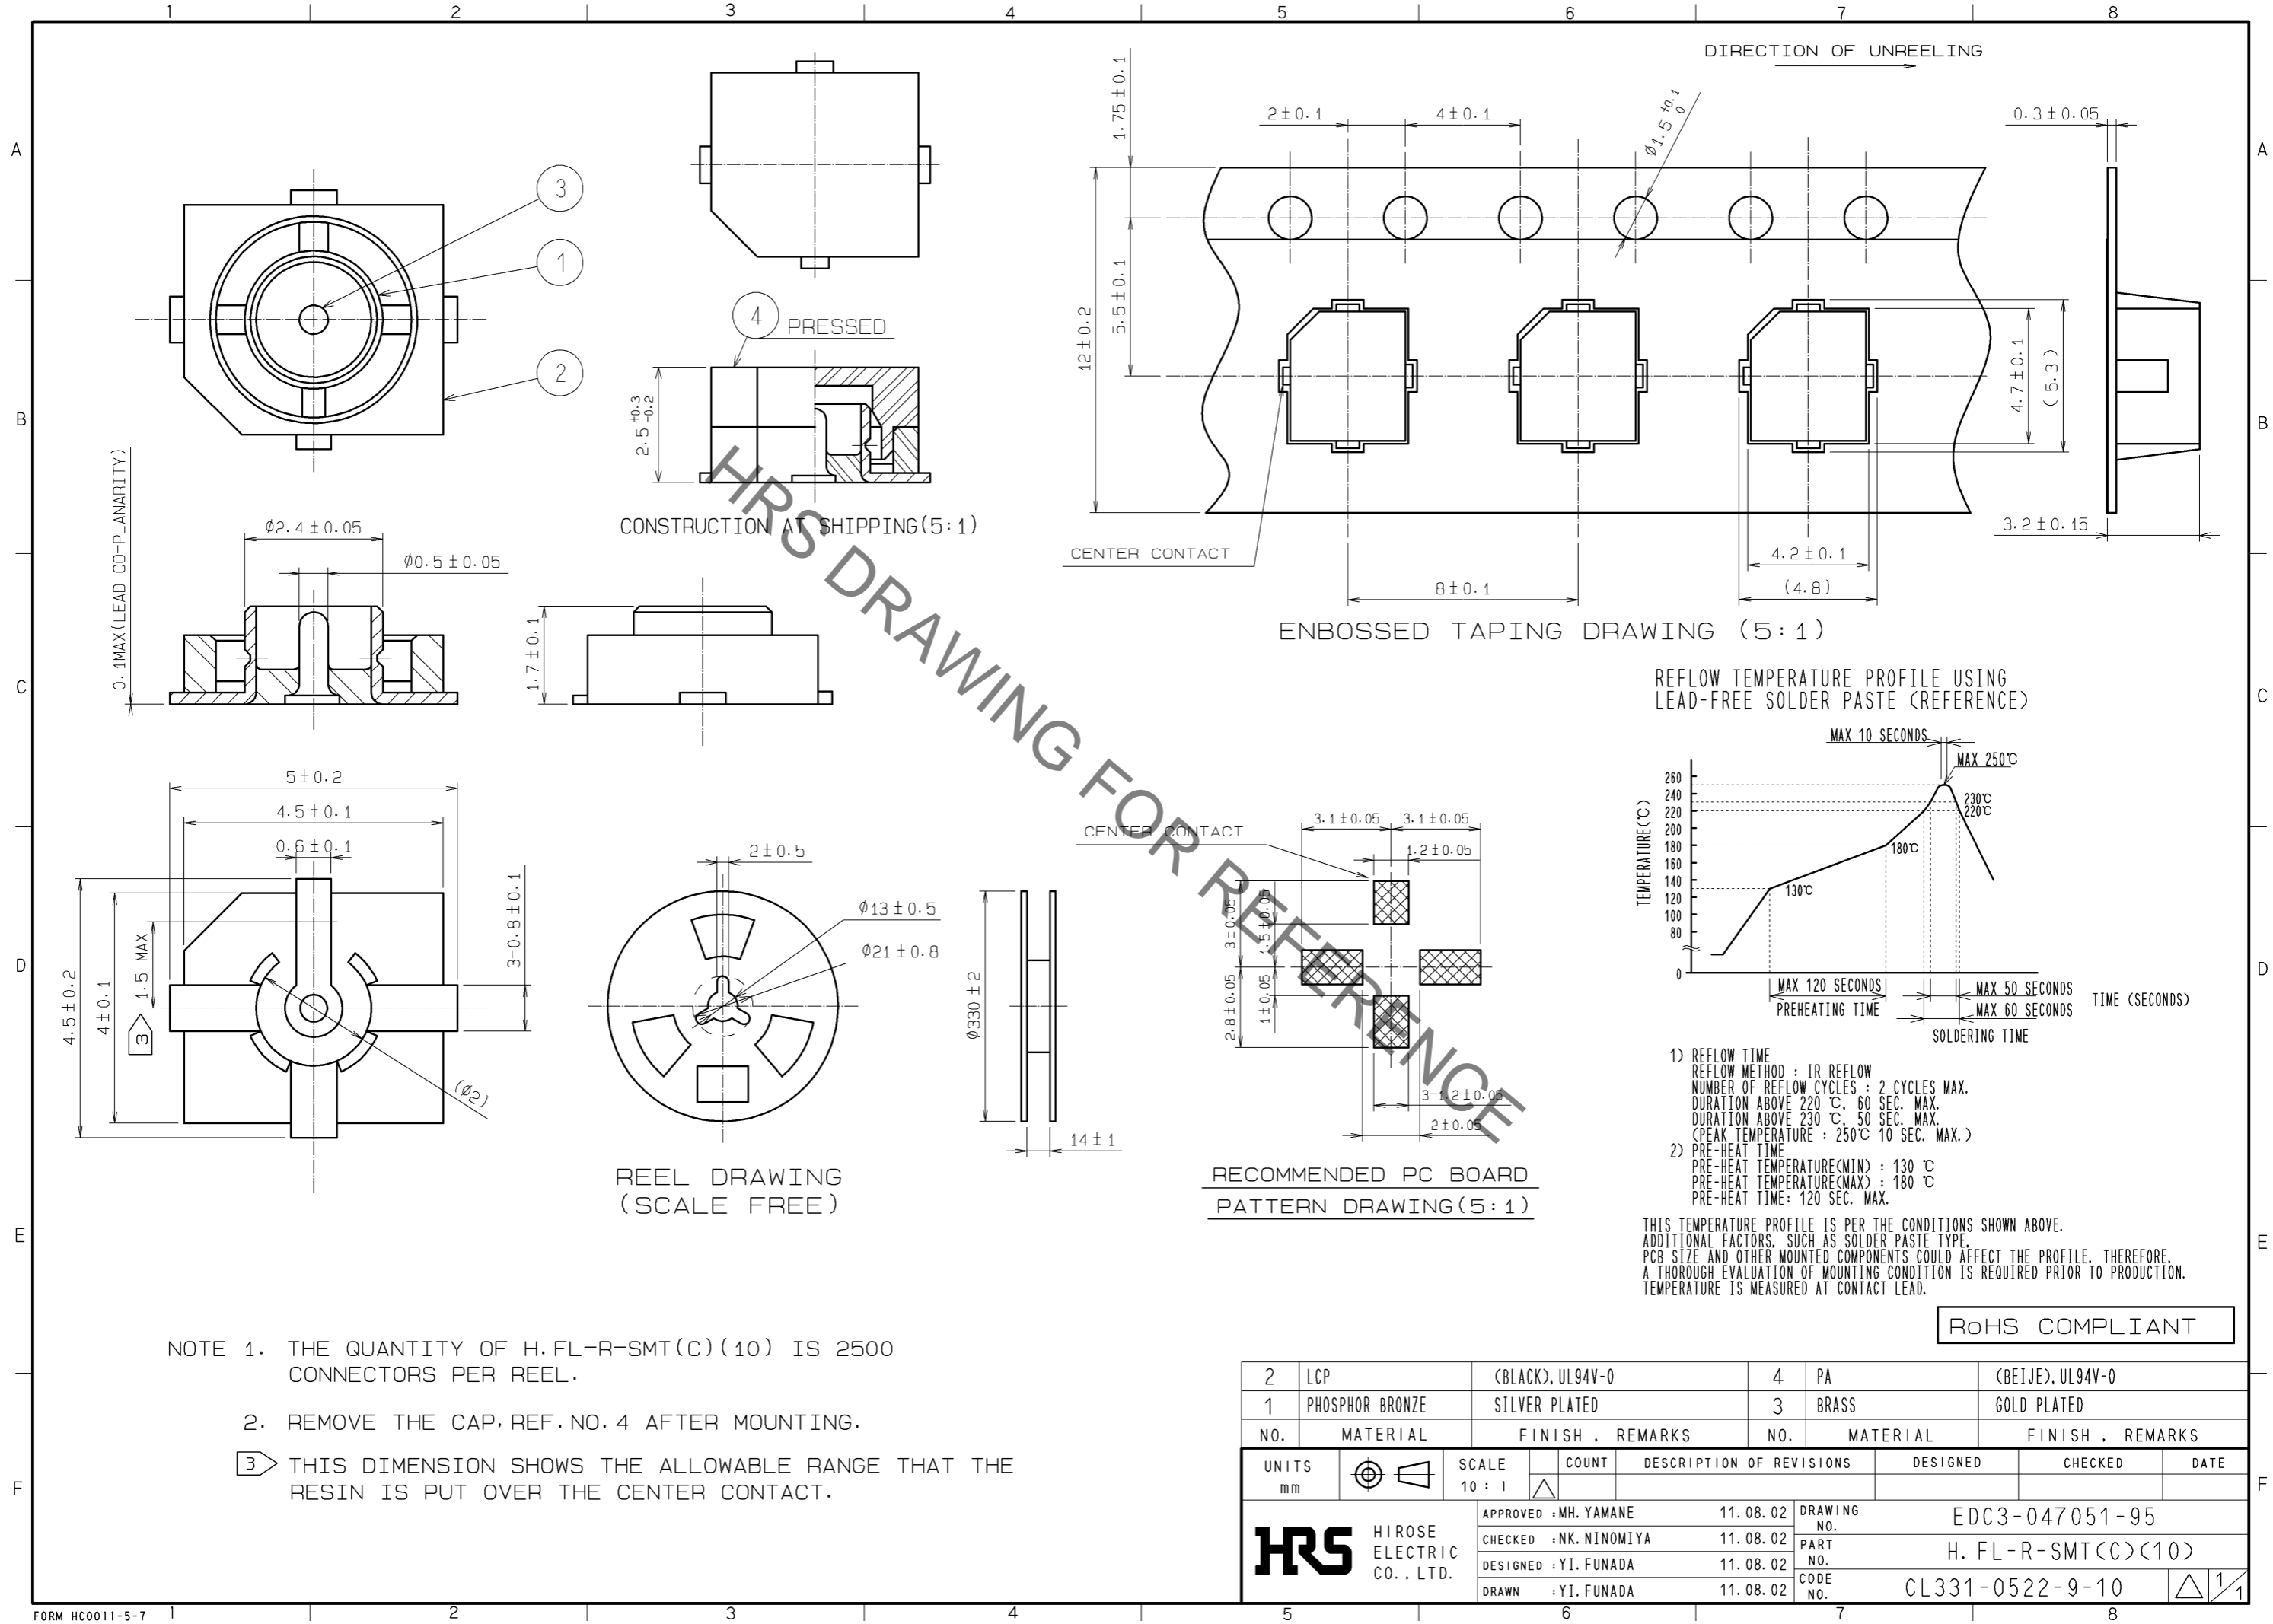

NOTE 1. THE QUANTITY OF H.FL-R-SMT(C)(10) IS 2500 CONNECTORS PER REEL.

2. REMOVE THE CAP, REF. NO. 4 AFTER MOUNTING.

③ THIS DIMENSION SHOWS THE ALLOWABLE RANGE THAT THE RESIN IS PUT OVER THE CENTER CONTACT.

THIS TEMPERATURE PROFILE IS PER THE CONDITIONS SHOWN ABOVE. ADDITIONAL FACTORS, SUCH AS SOLDER PASTE TYPE, PCB SIZE AND OTHER MOUNTED COMPONENTS COULD AFFECT THE PROFILE, THEREFORE, A THOROUGH EVALUATION OF MOUNTING CONDITION IS REQUIRED PRIOR TO PRODUCTION. TEMPERATURE IS MEASURED AT CONTACT LEAD.

RoHS COMPLIANT

2	LCP	(BLACK), UL94V-0	4	PA	(BEIJE), UL94V-0
1	PHOSPHOR BRONZE	SILVER PLATED	3	BRASS	GOLD PLATED
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE	10 : 1	COUNT	△
APPROVED : MH. YAMANE		11. 08. 02		DRAWING NO.	
CHECKED : NK. NINOMIYA		11. 08. 02		PART NO.	
DESIGNED : YI. FUNADA		11. 08. 02		CODE NO.	
DRAWN : YI. FUNADA		11. 08. 02		CL331-0522-9-10	
				DESIGNED	
				CHECKED	
				DATE	
				EDC3-047051-95	
				H. FL-R-SMT(C)(10)	
				△ 1/1	