




ILS 1 Near IR Emitter PowerStar, 1550nm

ILH-G11193-02R-SC201-WIR200.

From Intelligent LED Solutions, 1 LED PowerStar using 1 Hamamatsu 5mm x 4mm near IR emitter LED, with a wavelength of 1550nm. Supplied with 200mm wires as standard.

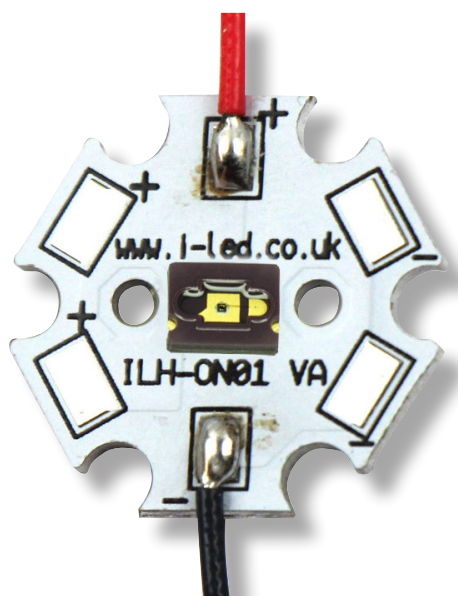

FEATURES

- » Small SMD (surface mount device) package from Hamamatsu
- » Low noise, low dark current
- » Size (L x W x H): 20mm x 20mm x 3.85mm
- » 200mm wires

APPLICATIONS

- » Optical power meter
- » Measurement/analytical instruments

All photographs shown are for illustration purpose only. Actual product may vary.

InGaAs PIN photodiodes

G11193 series

Small package, surface mount type

Features

- ➔ Small SMD (surface mount device) package
- ➔ Low noise, low dark current
- ➔ Low price

Applications

- ➔ Optical power meter
- ➔ Measurement/analytical instruments

Structure

Parameter	G11193-02R	G11193-03R	G11193-10R	Unit
Package	SMD			-
Photosensitive area	φ0.2	φ0.3	φ1.0	mm
Window	Resin			-

Absolute maximum ratings

Parameter	Symbol	Condition	G11193-02R	G11193-03R	G11193-10R	Unit
Reverse voltage	V_R Max.		10			V
Operating temperature	T_{opr}	No dew condensation*1	-25 to +85			°C
Storage temperature	T_{stg}	No dew condensation*1	-40 to +100			°C
Reflow soldering conditions	-		Peak temperature 240 °C, one time			-

*1: When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics (Ta=25 °C)

Parameter	Symbol	Condition	G11193-02R			G11193-03R			G11193-10R			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Spectral response range	λ	Higher than 10% of peak	-	0.9 to 1.7	-	-	0.9 to 1.7	-	-	0.9 to 1.7	-	μm
Peak sensitivity wavelength	λ_p		-	1.55	-	-	1.55	-	-	1.55	-	μm
Photo sensitivity	S	$\lambda=1.3 \mu\text{m}$	0.75	0.85	-	0.75	0.85	-	0.75	0.85	-	A/W
		$\lambda=1.55 \mu\text{m}$	0.77	1.0	-	0.77	1.0	-	0.77	1.0	-	
Dark current	I_D	$V_R=5 \text{ V}$	-	40	800	-	100	1200	-	800	4000	pA
Temperature coefficient of dark current	ΔT_{ID}	$V_R=1 \text{ V}$	-	1.09	-	-	1.09	-	-	1.09	-	times/°C
Cut-off frequency	f_c	$V_R=5 \text{ V}$, $R_L=50 \Omega$, -3 dB	0.6	1	-	0.2	0.5	-	0.025	0.06	-	GHz
Terminal capacitance	C_t	$V_R=5 \text{ V}$, $f=1 \text{ MHz}$	-	3	5	-	5	8	-	55	120	pF
Shunt resistance	R_{sh}	$V_R=10 \text{ mV}$	0.25	1.4	-	0.2	1	-	0.025	0.125	-	GΩ
Detectivity	D^*	$\lambda=\lambda_p$	1×10^{12}	5×10^{12}	-	1×10^{12}	5×10^{12}	-	1×10^{12}	5×10^{12}	-	$\text{cm} \cdot \text{Hz}^{1/2}/\text{W}$
Noise equivalent power	NEP	$\lambda=\lambda_p$	-	3×10^{-15}	1×10^{-14}	-	4×10^{-15}	1×10^{-14}	-	1.4×10^{-14}	4×10^{-14}	$\text{W}/\text{Hz}^{1/2}$

The G11193 series may be damaged by electrostatic discharge, etc. Be careful when using the G11193 series.

Spectral response



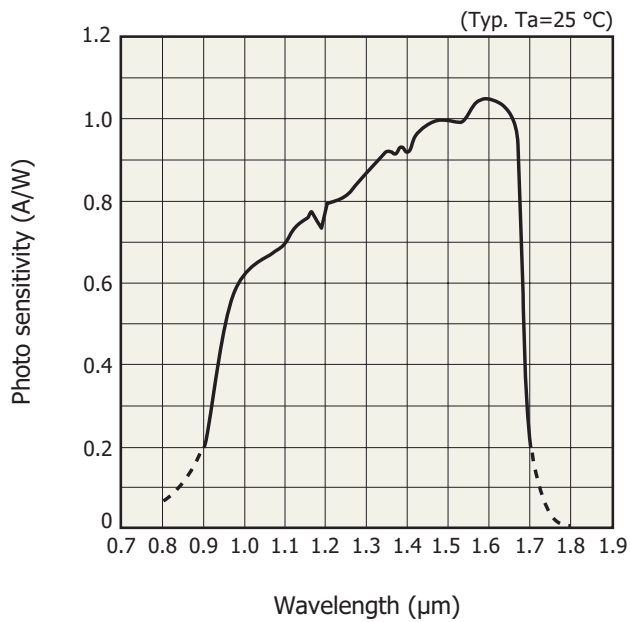



Photo sensitivity temperature characteristic

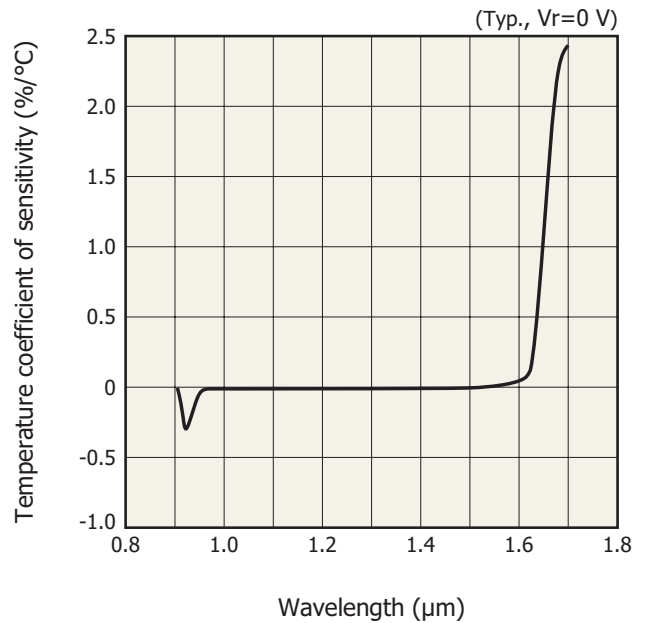


Dark current vs. reverse voltage

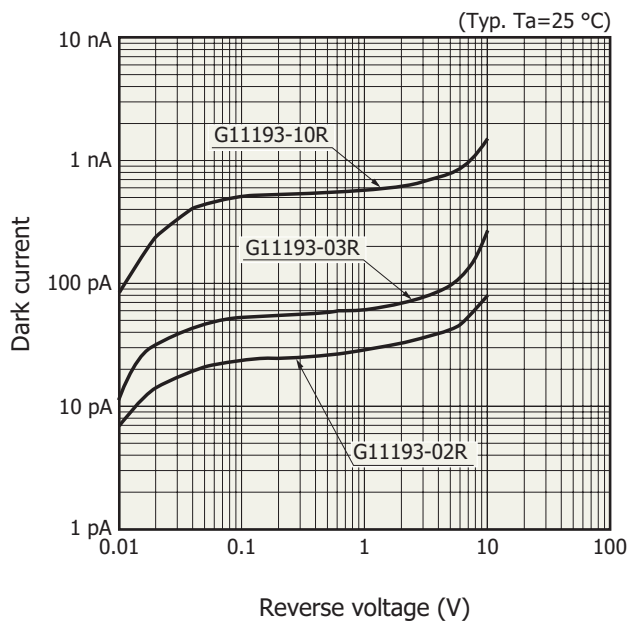


Terminal capacitance vs. reverse voltage

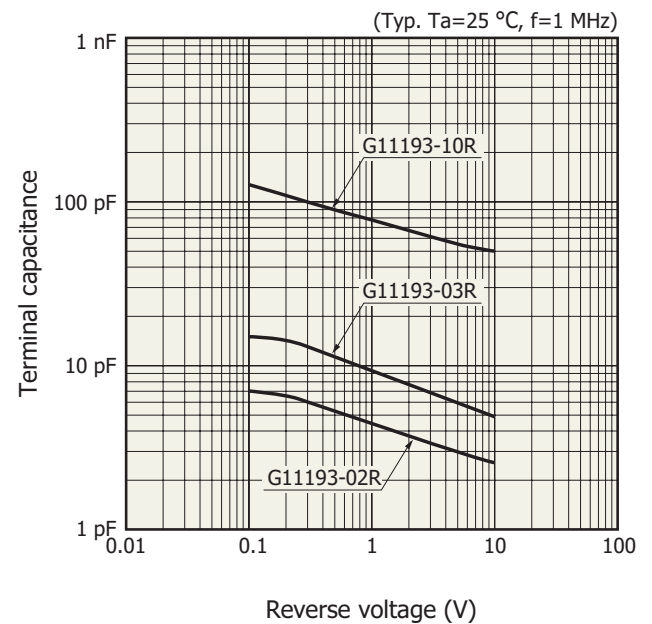

Dark current vs. ambient temperature

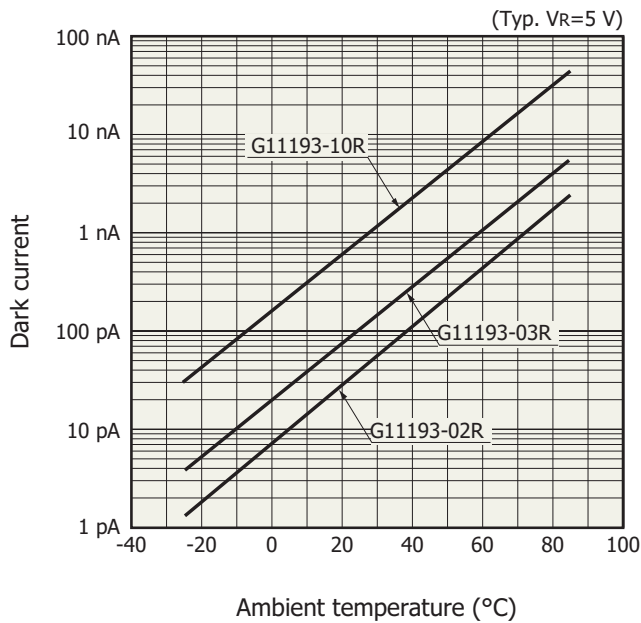


Recommended solder reflow conditions

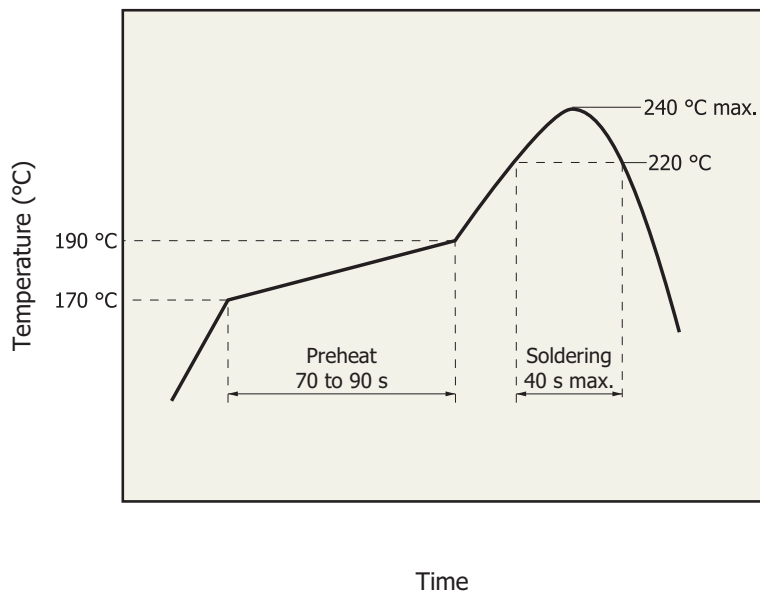

- After unpacking, store the device in an environment at a temperature range of 5 to 30 °C and a humidity of 60% or less, and perform reflow soldering within 1 year.
- Thermal stress applied to the device during reflow soldering differs depending on the PC board and reflow oven being used.
- When setting the reflow conditions, make sure that the reflow soldering process does not degrade device reliability.

KIRD80627EA

Dimensional outline (unit: mm)

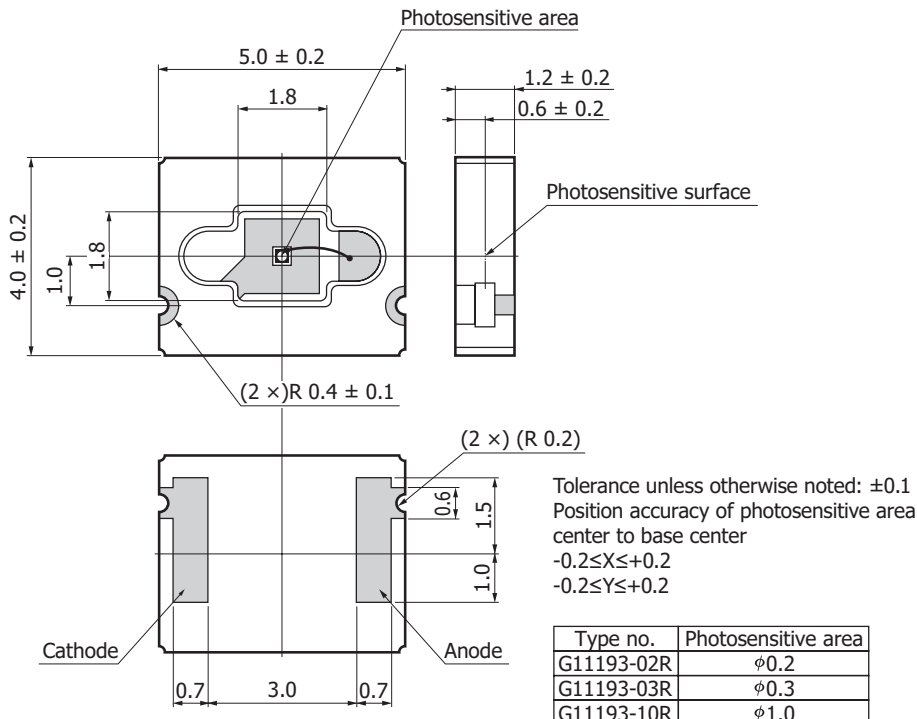

KIRDA0210EC

Related information

www.hamamatsu.com/sp/ssd/doc_en.html

■ Precautions

- Disclaimer
- Safety consideration
- Surface mount type products

■ Technical information

- Infrared detectors



Intelligent LED Solutions, Unit 2, Berkshire Business Centre, Berkshire Drive, Thatcham, Berkshire, RG19 4EW
Telephone: +44 (0)1635 294606 Email: info@i-led.co.uk Web: www.i-led.co.uk
A division of Intelligent Group Solutions Ltd

Information described in this material is current as of November 2017.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation, 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218, E-mail: usa@hamamatsu.com
Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8, E-mail: info@hamamatsu.de
France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10, E-mail: infos@hamamatsu.fr
United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777, E-mail: info@hamamatsu.co.uk
North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01, E-mail: info@hamamatsu.se
Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41, E-mail: info@hamamatsu.it
China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866, E-mail: hpc@hamamatsu.com.cn
Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No. 158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)03-659-0080, Fax: (886)03-659-0081, E-mail: info@tw.hpk.co.jp