



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Number of Rows: **1**

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	4
Number of Rows	1

Electrical Characteristics

Operating Voltage	50 VDC
-------------------	--------

Body Features

Connector & Keying Code	A
-------------------------	---



Primary Product Color	Natural
Contact Features	
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1 µm[39.37 µin]
PCB Contact Termination Area Plating Material Finish	Bright
Contact Mating Area Plating Material Thickness	2 µm[78.74 µin]
Mating Square Post Dimension	.5 mm[.02 in]
Mating Tab Width	.5 mm[.02 in]
PCB Contact Termination Area Plating Material Thickness	2 µm[78.74 µin]
Contact Shape & Form	Square
Contact Layout	Inline
Contact Base Material	Brass
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Finish	Bright
Contact Mating Area Plating Material	Tin (Sn)
Contact Type	Tab
Contact Current Rating (Max)	2.2 A
Termination Features	
Termination Post & Tail Length	2.6 mm[.102 in]
Square Termination Post & Tail Dimension	.5 mm[.02 in]
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
Mating Retention Type	Latch
Mating Retention	With
Mating Alignment Type	Keyed
PCB Mount Alignment Type	Locating Posts
PCB Mount Retention	Without
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Mating Alignment	With
Housing Features	
Housing Material	Nylon 6/6 GF



Centerline (Pitch)	2 mm[.079 in]
--------------------	---------------

Dimensions

Connector Width	5.6 mm[.22 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Connector Height	6.35 mm[.25 in]
Connector Length	10 mm[.39 in]

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Agency/Standards Products	UL
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	300
Packaging Method	Package

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

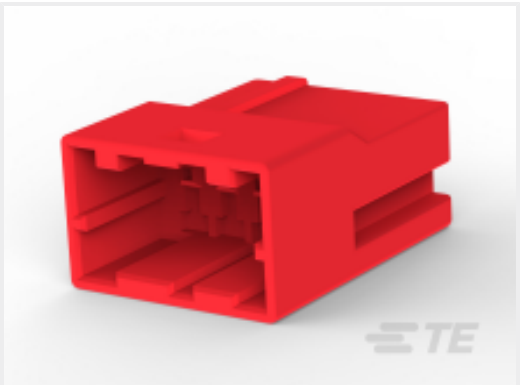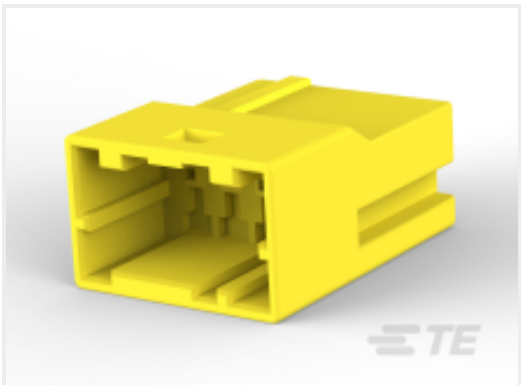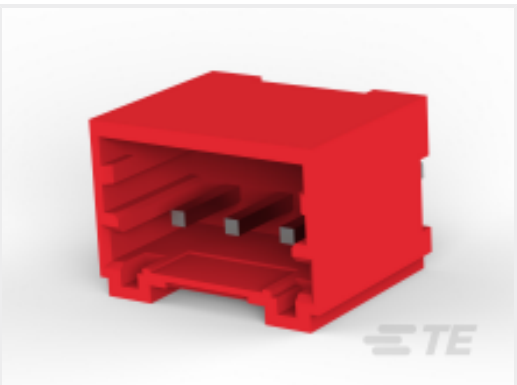 TE Part # 1-1971032-8 8POS HEADER ASSEMBLY FOR GIC 2.0 EV	 TE Part # 1971032-2 2POS HEADER ASSEMBLY FOR GIC 2.0 EV	 TE Part # 1-1903393-2 GIC 2.5 W CAP HSG 4P RED	 TE Part # 1971032-3 3P HEADER ASSEMBLY FOR GIC 2.0 EV
 TE Part # 1971032-9 9POS HEADER ASSEMBLY FOR GIC 2.0 EV	 TE Part # 1971032-7 7pos header assembly for gic 2.0 ev	 TE Part # 1-1971032-4 4POS HEADER ASSEMBLY FOR GIC 2.0 EV	 TE Part # 1903393-1 GIC 2.5 W CAP HSG 4P NATURAL
 TE Part # 1971032-1 10POS HEADER ASSEMBLY FOR GIC 2.0 EV	 TE Part # 3-1903393-4 GIC 2.5 W CAP HSG 4P YELLOW	 TE Part # 1971200-1 GIC 2.0 EV 5/8P HEADER ASSEMBLY	 TE Part # 1-1971032-3 3POS HEADER ASSEMBLY FOR GIC 2.0 EV
 TE Part # 1971032-8 8POS HEADER ASSEMBLY FOR GIC 2.0 EV			

Also in the Series | GRACE INERTIA 2.0




Connector Contacts(4)



PCB Headers & Receptacles(70)




Rectangular Connector Housings(20)

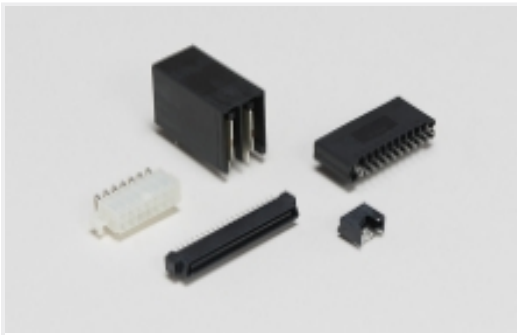

Standard Rectangular Connectors(38)



Wire-to-Board Connector Assemblies & Housings(1)

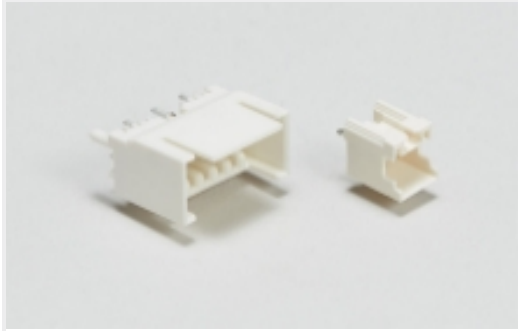

Wire-to-Board Headers & Receptacles (70)

Customers Also Bought




TE Part #1-1393249-1
W58-XB1A4A-2=W58



TE Part #173977-3
CT CONN MT REC ASSY 3P




TE Part #5-103944-1
8X2 MTE SHRD PIN SR POL .100CL

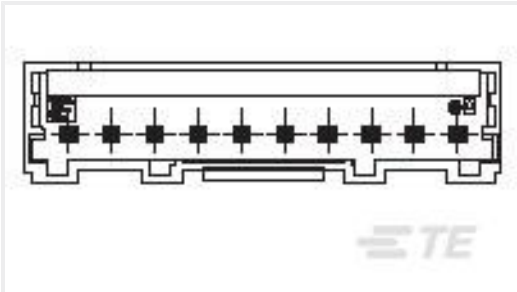

TE Part #1971032-9
9POS HEADER ASSEMBLY FOR GIC 2.0 EV




TE Part #3-1747052-4
GIC 7.92MM CONN HDR ASS'Y 2POS YELLOW

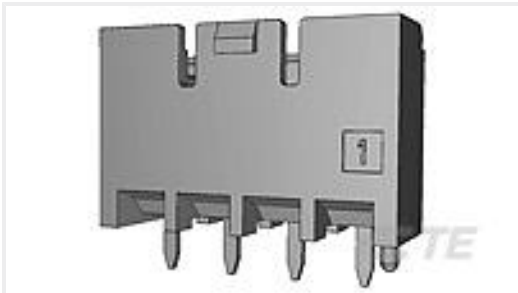


TE Part #1376384-1
5mm B-T-W Conn. 4P HDR ASSEMBL




TE Part #1747052-1
GRACE INERTIA CONNECTOR 7.92 2POS_HEADER

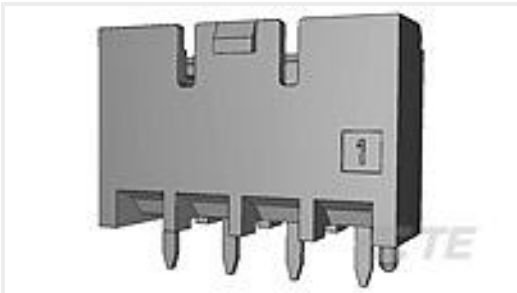

TE Part #3-1376385-4
5mm B-T-W Conn. 6P HDR ASSEMBL

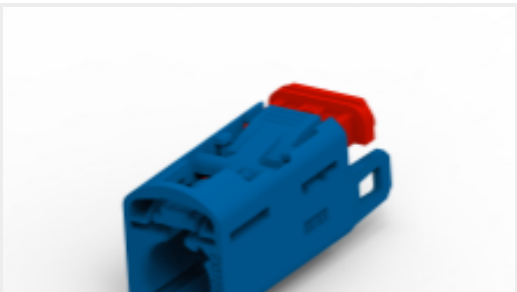

TE Part #2307383-3
1POS,FAKRA AUT,SOC HSG ASSY, SLD,180 DEG



TE Part #1-1971032-7
7POS HEADER ASSEMBLY FOR GIC 2.0 EV

Documents



Product Drawings

4POS HEADER ASSEMBLY FOR GIC 2.0 EV

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1971032-4_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1971032-4_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1971032-4_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English