


# LMT392



## Sensor for point level detection

LMCCE-A01E-QPKG-2/US

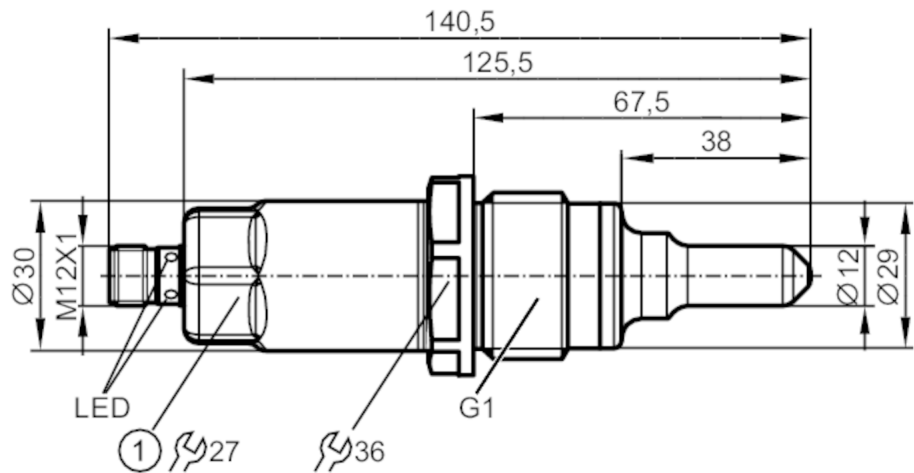

1 Tightening torque 35 Nm



### Product characteristics

|                              |                              |
|------------------------------|------------------------------|
| Number of inputs and outputs | Number of digital outputs: 2 |
| Factory setting              | hydrous media                |
| Process connection           | G 1 external thread          |

### Application

|                    |                                                                                      |
|--------------------|--------------------------------------------------------------------------------------|
| Special feature    | Gold-plated contacts                                                                 |
| Installation       | suited for installation in existing tuning fork adapters                             |
| Media              | Liquids                                                                              |
| Recommended media  | water; hydrous media; oils; oil-based media                                          |
| Cannot be used for | See the operating instructions, chapter "Function and features".                     |
| Probe length [mm]  | 38                                                                                   |
| Tank pressure      | -1...40; (applications subject to the German Federal Water Act : -0,5...10 bar) bar  |
|                    | -0.1...4; (applications subject to the German Federal Water Act : -0,5...10 bar) MPa |

| Oil                           |      |                                                                                     |
|-------------------------------|------|-------------------------------------------------------------------------------------|
| Medium temperature            | [°C] | -25...100; (applications subject to the German Federal Water Act 0...100 °C)        |
| Medium temperature short time | [°C] | -25...150; (1 h; applications subject to the German Federal Water Act : 0...100 °C) |
| Water                         |      |                                                                                     |
| Medium temperature            | [°C] | -25...85; (applications subject to the German Federal Water Act : 0...85 °C)        |
| Medium temperature short time | [°C] | -25...150; (1 h; applications subject to the German Federal Water Act : 0...100 °C) |

### Electrical data

|                             |            |
|-----------------------------|------------|
| Operating voltage [V]       | 18...30 DC |
| Current consumption [mA]    | < 50       |
| Protection class            | III        |
| Reverse polarity protection | yes        |
| Measuring principle         | capacitive |

# LMT392



## Sensor for point level detection

LMCCE-A01E-QPKG-2/US

| Inputs / outputs                                     |              |                                                                                                                                                                        |                   |          |                  |            |                  |              |
|------------------------------------------------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------|------------------|------------|------------------|--------------|
| Number of inputs and outputs                         |              | Number of digital outputs: 2                                                                                                                                           |                   |          |                  |            |                  |              |
| Outputs                                              |              |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| Total number of outputs                              |              | 2                                                                                                                                                                      |                   |          |                  |            |                  |              |
| Output signal                                        |              | switching signal; IO-Link                                                                                                                                              |                   |          |                  |            |                  |              |
| Electrical design                                    |              | PNP                                                                                                                                                                    |                   |          |                  |            |                  |              |
| Number of digital outputs                            |              | 2                                                                                                                                                                      |                   |          |                  |            |                  |              |
| Max. voltage drop switching output DC [V]            |              | 2.5                                                                                                                                                                    |                   |          |                  |            |                  |              |
| Permanent current rating of switching output DC [mA] |              | 100                                                                                                                                                                    |                   |          |                  |            |                  |              |
| Short-circuit protection                             |              | yes                                                                                                                                                                    |                   |          |                  |            |                  |              |
| Type of short-circuit protection                     |              | pulsed                                                                                                                                                                 |                   |          |                  |            |                  |              |
| Overload protection                                  |              | yes                                                                                                                                                                    |                   |          |                  |            |                  |              |
| Measuring/setting range                              |              |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| Factory setting                                      |              | hydrous media                                                                                                                                                          |                   |          |                  |            |                  |              |
| Response times                                       |              |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| Response time [s]                                    |              | < 0.5                                                                                                                                                                  |                   |          |                  |            |                  |              |
| Interfaces                                           |              |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| Communication interface                              |              | IO-Link                                                                                                                                                                |                   |          |                  |            |                  |              |
| Transmission type                                    |              | COM2 (38,4 kBaud)                                                                                                                                                      |                   |          |                  |            |                  |              |
| IO-Link revision                                     |              | 1.1                                                                                                                                                                    |                   |          |                  |            |                  |              |
| SDCI standard                                        |              | IEC 61131-9                                                                                                                                                            |                   |          |                  |            |                  |              |
| Profiles                                             |              | Smart Sensor: Process Data Variable; Device Identification                                                                                                             |                   |          |                  |            |                  |              |
| SIO mode                                             |              | yes                                                                                                                                                                    |                   |          |                  |            |                  |              |
| Required master port type                            |              | A                                                                                                                                                                      |                   |          |                  |            |                  |              |
| Process data analogue                                |              | 1                                                                                                                                                                      |                   |          |                  |            |                  |              |
| Process data binary                                  |              | 2                                                                                                                                                                      |                   |          |                  |            |                  |              |
| Min. process cycle time [ms]                         |              | 2.3                                                                                                                                                                    |                   |          |                  |            |                  |              |
| Supported DeviceIDs                                  |              | <table><tr><th>Type of operation</th><th>DeviceID</th></tr><tr><td>default</td><td>449</td></tr></table>                                                               | Type of operation | DeviceID | default          | 449        |                  |              |
| Type of operation                                    | DeviceID     |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| default                                              | 449          |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| Operating conditions                                 |              |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| Ambient temperature [°C]                             |              | -20...85                                                                                                                                                               |                   |          |                  |            |                  |              |
| Note on ambient temperature                          |              | Medium temperature 100...150 °C                                                                                                                                        |                   |          |                  |            |                  |              |
|                                                      |              | -40...60 °C                                                                                                                                                            |                   |          |                  |            |                  |              |
| Storage temperature [°C]                             |              | -40...85                                                                                                                                                               |                   |          |                  |            |                  |              |
| Protection                                           |              | IP 68; IP 69K                                                                                                                                                          |                   |          |                  |            |                  |              |
| Tests / approvals                                    |              |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| Approval                                             |              | WHG; General building authority approval; overflow prevention                                                                                                          |                   |          |                  |            |                  |              |
| EMC                                                  |              | <table><tr><td>DIN EN 61000-6-2</td><td></td></tr><tr><td>DIN EN 61000-6-4</td><td>open tanks</td></tr><tr><td>DIN EN 61000-6-3</td><td>closed tanks</td></tr></table> | DIN EN 61000-6-2  |          | DIN EN 61000-6-4 | open tanks | DIN EN 61000-6-3 | closed tanks |
| DIN EN 61000-6-2                                     |              |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| DIN EN 61000-6-4                                     | open tanks   |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| DIN EN 61000-6-3                                     | closed tanks |                                                                                                                                                                        |                   |          |                  |            |                  |              |
| Shock resistance                                     |              | DIN EN 60068-2-27<br>50 g (11 ms)                                                                                                                                      |                   |          |                  |            |                  |              |
| Vibration resistance                                 |              | DIN EN 60068-2-6<br>20 g (10...2000 Hz)                                                                                                                                |                   |          |                  |            |                  |              |

LMT392



Sensor for point level detection

LMCCE-A01E-QPKG-2/US

|             |                 |        |
|-------------|-----------------|--------|
| MTTF        | [years]         | 222.77 |
| UL approval | UL Approval no. | H001   |

|                          |                                                |                  |
|--------------------------|------------------------------------------------|------------------|
| Mechanical data          |                                                |                  |
| Weight                   | [g]                                            | 398.5            |
| Dimensions               | [mm]                                           | Ø 30 / L = 125.5 |
| Materials                | stainless steel (316L/1.4404); PEEK; PEI; FKM  |                  |
| Materials (wetted parts) | PEEK; surface characteristics: Ra < 0,8 / Rz 4 |                  |
| Process connection       | G 1 external thread                            |                  |

|                               |                  |             |
|-------------------------------|------------------|-------------|
| Displays / operating elements |                  |             |
| Display                       | switching status | LED, yellow |
|                               | operating status | LED, green  |


|               |        |  |
|---------------|--------|--|
| Remarks       |        |  |
| Pack quantity | 1 pcs. |  |

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

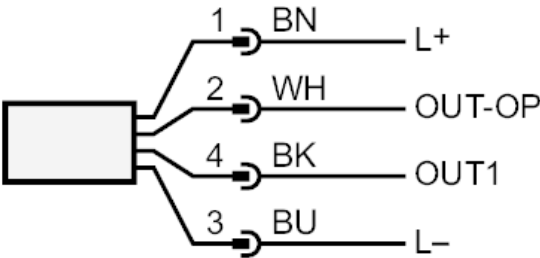

|        |                                                                            |
|--------|----------------------------------------------------------------------------|
| OUT1:  | switching output                                                           |
| OUT-OP | switching output overflow prevention to the German Federal Water Act (WHG) |
|        | colours to DIN EN 60947-5-2                                                |
|        | Core colours :                                                             |
| BK =   | black                                                                      |
| BN =   | brown                                                                      |
| BU =   | blue                                                                       |
| WH =   | white                                                                      |