



Enables groups of protectors to be simultaneously mounted and earthed via their earth stud. Suitable for installing protectors with one or two earth studs on their top face. Available with 4, 8, 16 and 32 mounting holes.

Application

Use CME kits to simultaneously mount and earth groups of single and double earth stud protectors. Each single earth stud protector requires one CME mounting position and each double earth stud protector requires two CME mounting positions.

- ✓ High conductivity copper with electro-tin plating and nylon insulating pillars, for low impedance to earth
- ✓ Single earth stud protectors are

ESP 06D	ESP 06E	ESP 06H	ESP TN
ESP 15D	ESP 15E	ESP 15H	ESP RTD
ESP 30D	ESP 30E	ESP 30H	ESP CCTV/B
ESP 50D	ESP 50E	ESP 50H	ESP CCTV/T
ESP 110D	ESP 110E	ESP 110H	ESP RS485
- ✓ Double earth stud protectors are


ESP 120-5A	ESP 120-16A	ESP 240-16A
ESP 240-5A	ESP 277-5A	ESP 277-16A

Once you know how many CME mounting positions you require choose a CME kit to suit:

- ✓ CME 4 has 4 mounting positions
- ✓ CME 8 has 8 mounting positions
- ✓ CME 16 has 16 mounting positions
- ✓ CME 32 has 32 mounting positions


Specification

	CME 4	CME 8	CME 16	CME 32
Hole size	6.5 mm with 20 mm spacings			
Weight	0.1 kg	0.15 kg	0.3 kg	0.6 kg
Dimensions				

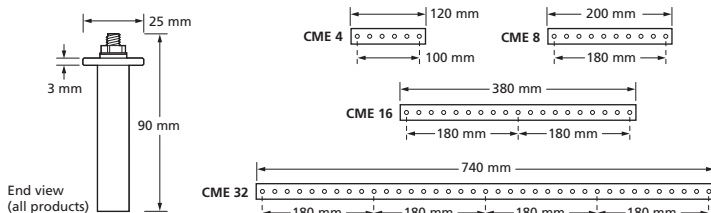

Features and benefits


- ✓ Enables quick and easy installation of protectors for added convenience
- ✓ Speedy installation of groups of protectors saves time and money
- ✓ Individual protectors can be changed without needing to remove others
- ✓ Sturdy construction
- ✓ Supplied with a choice of flat and round ended fixing screws to suit your application

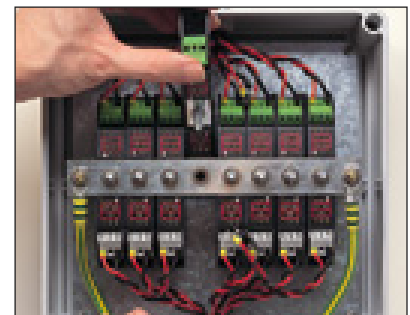

CME kits allow the simultaneous mounting and earthing of protectors through their central earth stud. Once installed, single protectors can be changed without removing others

Installation

The earth bar is supported by a series of mounting pillars (which are fixed to the cubicle or box base). Protectors are attached to the CME's earth bar via their earth stud(s) and earthed with shared connections to earth. We suggest one earth connection per mounting pillar.

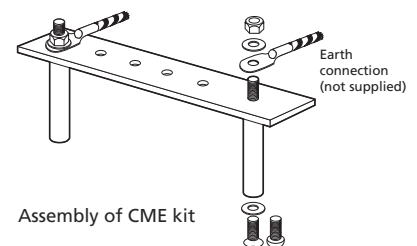

Accessories

Enclosures suitable for a CME 4 and its associated protectors (WBX 4/GS), CME 8 and protectors (WBX 8/GS) or one or two CME 16 and protectors (WBX 16/2/G).