

## Accessories

	Page
D-Sub adaptor .....	<b>40.02</b>
Han® Split Hood .....	<b>40.04</b>
Cable clamps for metric cable entries .....	<b>40.06</b>
Cable clamps for PG cable entries .....	<b>40.08</b>
Further Accessories .....	<b>40.11</b>
Coding for Hoods/Housings and inserts .....	<b>40.12</b>
PE-Multiple ground connection .....	<b>40.13</b>
Cable clamp fitting .....	<b>40.14</b>
Docking frame .....	<b>40.15</b>
Grip panel .....	<b>40.16</b>
Ground terminal .....	<b>40.18</b>
Screws .....	<b>40.19</b>
Locking levers .....	<b>40.20</b>
Gaskets, seals .....	<b>40.21</b>

# D-Sub



Number of contacts

# 9-50



D-Sub adaptor for Han A® hood/housing


Identification      D-Sub size      Han A housing size      Part No.      Drawing      Dimensions in mm

Plastic adaptor  
for 1 x D-Sub<sup>1)</sup>

9

10 A


**09 20 000 9932**

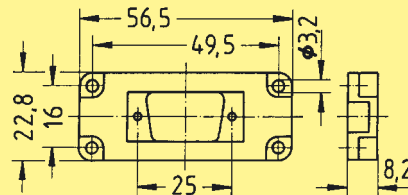

15

10 A

**09 20 000 9928**

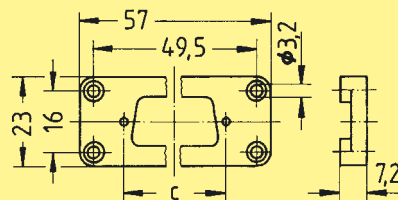

25

10 A


**09 20 000 9929**

Size	D-Sub	c
10 A	15	33.3
10 A	25	47

50

16 A

**09 20 000 9931**

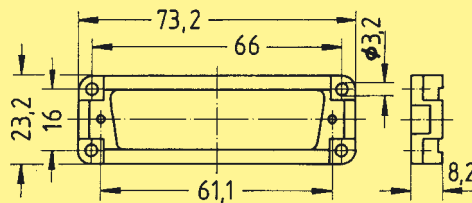


Delivery comprises:  
1 adaptor  
4 fixing screws for adaptor  
2 fixing screws for D-Sub connector

Metal adaptor  
for 1 x D-Sub<sup>1)</sup>

25

10 A

**09 20 000 9925**

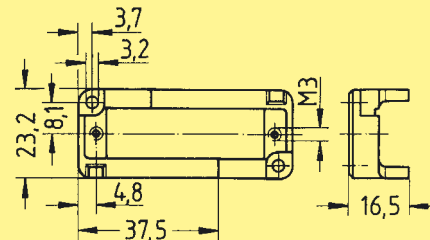

37

16 A

**09 20 000 9925**

Delivery comprises:  
2 adaptor  
2 fixing screws for adaptor  
2 fixing screws for D-Sub connector

Accessories

40  
02

<sup>1)</sup> only for Standard D-Sub, not for HD D-Sub

Stock items in bold type

Number of contacts

# 9-50




## D-Sub adaptor for Han® B hood/housing

Identification      D-Sub size      Han B housing size      Part No.      Drawing      Dimensions in mm


Plastic adaptor  
for 1 x D-Sub<sup>1)</sup>

9	6 B	<b>09 30 000 9965</b>
15	6 B	<b>09 30 000 9966</b>
25	10 B	<b>09 30 000 9967</b>
37	16 B	<b>09 30 000 9968</b>
50	16 B	<b>09 30 000 9969</b>

Delivery comprises:  
1 adaptor  
4 fixing screws for adaptor  
2 fixing screws for D-Sub connector



Mounting in housing  
Character "A" visible




Mounting in hood  
Character "T" visible

Size	D-Sub	a	b	c
6 B	9	44	51.5	25
6 B	15	44	51.5	33.3
10 B	25	57	64.5	47
16 B	37	77.5	85	63.5
16 B	50	77.5	85	61.1


Plastic adaptor  
for 2 x D-Sub<sup>1)</sup>

2 x 9	6 B	<b>09 30 000 9970</b>
2 x 15	6 B	<b>09 30 000 9971</b>
2 x 25	10 B	<b>09 30 000 9972</b>
2 x 37	16 B	<b>09 30 000 9973</b>
2 x 50	16 B	<b>09 30 000 9974</b>

Delivery comprises:  
1 adaptor  
4 fixing screws for adaptor  
4 fixing screws for D-Sub connector



Mounting in housing  
Character "A" visible



Mounting in hood  
Character "T" visible

Size	D-Sub	a	b	c
6 B	9	44	51.5	25
6 B	15	44	51.5	33.3
10 B	25	57	64.5	47
16 B	37	77.5	85	63.5
16 B	50	77.5	85	61.1

Accessories

<sup>1)</sup> only for Standard D-Sub, not for HD D-Sub



## Features

- ❑ Compatible with Han® B housings, bulkhead mounting, with 2 levers, standard panel cut out
- ❑ Allows the entry of pre-assembled cables into a switch cabinet
- ❑ IP 54 due to continuous contoured sealing
- ❑ Easy handling
- ❑ No special tools required for assembly
- ❑ Standard screw driver (5 x 1 mm) necessary to open split hood
- ❑ Up to 4 cable entries (3 – 16 mm diameter)
- ❑ High cable density
- ❑ From 10 mm Ø upwards cable tie is available for better strain relief
- ❑ Use of identification strips is possible
- ❑ Little wiring work and high degree of flexibility
- ❑ Manufacturer's guarantee of pre-assembled cables remains valid

## Technical characteristics

### Split hood

Material	Polycarbonate
Flammability acc. to UL 94	V 0
Limiting temperatures	– 40 °C / + 125 °C
Cable entries	3, 4
Degree of protection in locked position with correct grommet	IP 54 <sup>1)</sup>
Max. cable diameter	3 – 16 mm
Locking cycles of bulkhead mounted housings	≥ 50
Locking cycles of split hood halves	≥ 10

### Cable entry glands




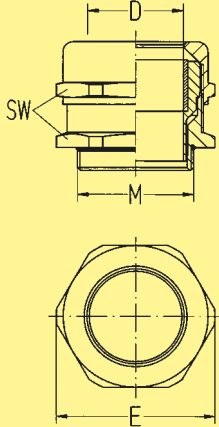

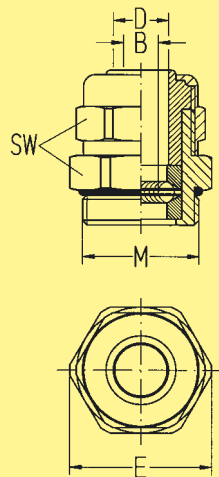
Material	Thermoplastic rubber, UL listed
Limiting temperatures	– 40 °C / + 125 °C
Colour	black

<sup>1)</sup> when mounted vertically in the longitudinal direction

## Pack contents

2 split hood halves







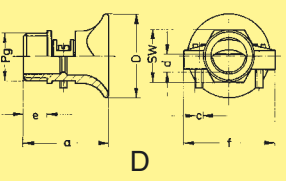








Identification	Part No.	Drawing	Dimensions in mm																																																																																
<b>Cable entry protection for metric cable entries (IP 68)</b>  Metal    Thermoplastic, white    Thermoplastic, black  		<table border="1"> <thead> <tr> <th>thread M</th> <th>cable diameter D</th> <th>SW</th> <th>E</th> </tr> </thead> <tbody> <tr><td>20</td><td>5 - 9 mm</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>20</td><td>6 - 12 mm</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>20</td><td>10 - 14 mm</td><td>24</td><td>Ø 26.5</td></tr> <tr><td>25</td><td>9 - 16 mm</td><td>30</td><td>Ø 33.5</td></tr> <tr><td>25</td><td>13 - 18 mm</td><td>30</td><td>Ø 33.5</td></tr> <tr><td>32</td><td>13 - 20 mm</td><td>40</td><td>Ø 44</td></tr> <tr><td>32</td><td>18 - 25 mm</td><td>40</td><td>Ø 44</td></tr> <tr><td>40</td><td>20 - 26 mm</td><td>50</td><td>Ø 55</td></tr> <tr><td>40</td><td>22 - 32 mm</td><td>50</td><td>Ø 55</td></tr> </tbody> </table>	thread M	cable diameter D	SW	E	20	5 - 9 mm	22	Ø 24.4	20	6 - 12 mm	22	Ø 24.4	20	10 - 14 mm	24	Ø 26.5	25	9 - 16 mm	30	Ø 33.5	25	13 - 18 mm	30	Ø 33.5	32	13 - 20 mm	40	Ø 44	32	18 - 25 mm	40	Ø 44	40	20 - 26 mm	50	Ø 55	40	22 - 32 mm	50	Ø 55																																									
	thread M	cable diameter D	SW	E																																																																															
	20	5 - 9 mm	22	Ø 24.4																																																																															
20	6 - 12 mm	22	Ø 24.4																																																																																
20	10 - 14 mm	24	Ø 26.5																																																																																
25	9 - 16 mm	30	Ø 33.5																																																																																
25	13 - 18 mm	30	Ø 33.5																																																																																
32	13 - 20 mm	40	Ø 44																																																																																
32	18 - 25 mm	40	Ø 44																																																																																
40	20 - 26 mm	50	Ø 55																																																																																
40	22 - 32 mm	50	Ø 55																																																																																
	<table border="1"> <tbody> <tr><td>19 00 000 5080</td><td>20</td><td>5 - 9 mm</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>19 00 000 5082</td><td>20</td><td>6 - 12 mm</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>19 00 000 5084</td><td>20</td><td>10 - 14 mm</td><td>24</td><td>Ø 26.5</td></tr> <tr><td>19 00 000 5090</td><td>25</td><td>9 - 16 mm</td><td>30</td><td>Ø 33.5</td></tr> <tr><td>19 00 000 5092</td><td>25</td><td>13 - 18 mm</td><td>30</td><td>Ø 33.5</td></tr> <tr><td>19 00 000 5094</td><td>32</td><td>13 - 20 mm</td><td>40</td><td>Ø 44</td></tr> <tr><td>19 00 000 5096</td><td>32</td><td>18 - 25 mm</td><td>40</td><td>Ø 44</td></tr> <tr><td>19 00 000 5097</td><td>40</td><td>20 - 26 mm</td><td>50</td><td>Ø 55</td></tr> <tr><td>19 00 000 5098</td><td>40</td><td>22 - 32 mm</td><td>50</td><td>Ø 55</td></tr> </tbody> </table>	19 00 000 5080	20	5 - 9 mm	22	Ø 24.4	19 00 000 5082	20	6 - 12 mm	22	Ø 24.4	19 00 000 5084	20	10 - 14 mm	24	Ø 26.5	19 00 000 5090	25	9 - 16 mm	30	Ø 33.5	19 00 000 5092	25	13 - 18 mm	30	Ø 33.5	19 00 000 5094	32	13 - 20 mm	40	Ø 44	19 00 000 5096	32	18 - 25 mm	40	Ø 44	19 00 000 5097	40	20 - 26 mm	50	Ø 55	19 00 000 5098	40	22 - 32 mm	50	Ø 55																																					
19 00 000 5080	20	5 - 9 mm	22	Ø 24.4																																																																															
19 00 000 5082	20	6 - 12 mm	22	Ø 24.4																																																																															
19 00 000 5084	20	10 - 14 mm	24	Ø 26.5																																																																															
19 00 000 5090	25	9 - 16 mm	30	Ø 33.5																																																																															
19 00 000 5092	25	13 - 18 mm	30	Ø 33.5																																																																															
19 00 000 5094	32	13 - 20 mm	40	Ø 44																																																																															
19 00 000 5096	32	18 - 25 mm	40	Ø 44																																																																															
19 00 000 5097	40	20 - 26 mm	50	Ø 55																																																																															
19 00 000 5098	40	22 - 32 mm	50	Ø 55																																																																															
	<table border="1"> <tbody> <tr><td>19 00 000 5180</td><td>20</td><td>5 - 9 mm</td><td>24</td><td>Ø 26.4</td></tr> <tr><td>19 00 000 5182</td><td>20</td><td>6 - 12 mm</td><td>24</td><td>Ø 26.4</td></tr> <tr><td>19 00 000 5184</td><td>20</td><td>10 - 14 mm</td><td>27</td><td>Ø 29.8</td></tr> <tr><td>19 00 000 5190</td><td>25</td><td>9 - 16 mm</td><td>33</td><td>Ø 36.5</td></tr> <tr><td>19 00 000 5192</td><td>25</td><td>13 - 18 mm</td><td>33</td><td>Ø 36.5</td></tr> <tr><td>19 00 000 5194</td><td>32</td><td>13 - 20 mm</td><td>42</td><td>Ø 46.8</td></tr> <tr><td>19 00 000 5196</td><td>32</td><td>18 - 25 mm</td><td>42</td><td>Ø 46.8</td></tr> <tr><td>19 00 000 5197</td><td>40</td><td>20 - 26 mm</td><td>53</td><td>Ø 58.8</td></tr> <tr><td>19 00 000 5198</td><td>40</td><td>22 - 32 mm</td><td>53</td><td>Ø 58.8</td></tr> </tbody> </table>	19 00 000 5180	20	5 - 9 mm	24	Ø 26.4	19 00 000 5182	20	6 - 12 mm	24	Ø 26.4	19 00 000 5184	20	10 - 14 mm	27	Ø 29.8	19 00 000 5190	25	9 - 16 mm	33	Ø 36.5	19 00 000 5192	25	13 - 18 mm	33	Ø 36.5	19 00 000 5194	32	13 - 20 mm	42	Ø 46.8	19 00 000 5196	32	18 - 25 mm	42	Ø 46.8	19 00 000 5197	40	20 - 26 mm	53	Ø 58.8	19 00 000 5198	40	22 - 32 mm	53	Ø 58.8																																					
19 00 000 5180	20	5 - 9 mm	24	Ø 26.4																																																																															
19 00 000 5182	20	6 - 12 mm	24	Ø 26.4																																																																															
19 00 000 5184	20	10 - 14 mm	27	Ø 29.8																																																																															
19 00 000 5190	25	9 - 16 mm	33	Ø 36.5																																																																															
19 00 000 5192	25	13 - 18 mm	33	Ø 36.5																																																																															
19 00 000 5194	32	13 - 20 mm	42	Ø 46.8																																																																															
19 00 000 5196	32	18 - 25 mm	42	Ø 46.8																																																																															
19 00 000 5197	40	20 - 26 mm	53	Ø 58.8																																																																															
19 00 000 5198	40	22 - 32 mm	53	Ø 58.8																																																																															
	<table border="1"> <tbody> <tr><td>19 00 000 5132</td><td>20</td><td>6 - 12 mm</td><td>24</td><td></td></tr> </tbody> </table>	19 00 000 5132	20	6 - 12 mm	24																																																																														
19 00 000 5132	20	6 - 12 mm	24																																																																																
<b>EMC clamp for metric cable entries (IP 68)</b>  		<table border="1"> <thead> <tr> <th>thread M</th> <th>cable-Ø D min.</th> <th>cable-Ø D max.</th> <th>shield-Ø B min.</th> <th>shield-Ø B max.</th> <th>SW</th> <th>E</th> </tr> </thead> <tbody> <tr><td>20</td><td>6.5</td><td>9.5</td><td>3.5</td><td>8.5</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>20</td><td>4.0</td><td>6.5</td><td>2.5</td><td>6.5</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>20</td><td>7</td><td>10.5</td><td>6.5</td><td>10.5</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>20</td><td>9</td><td>13</td><td>6.5</td><td>10.5</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>25</td><td>6.5</td><td>9.5</td><td>3</td><td>8</td><td>28</td><td>Ø 31.2</td></tr> <tr><td>25</td><td>9</td><td>13</td><td>4.8</td><td>8</td><td>28</td><td>Ø 31.2</td></tr> <tr><td>32</td><td>11.5</td><td>15.5</td><td>8</td><td>13.5</td><td>35</td><td>Ø 38.5</td></tr> <tr><td>32</td><td>14</td><td>18</td><td>9</td><td>14.5</td><td>35</td><td>Ø 38.5</td></tr> <tr><td>40</td><td>17</td><td>20.5</td><td>15</td><td>20</td><td>43</td><td>Ø 47.3</td></tr> <tr><td>40</td><td>20</td><td>25</td><td>15</td><td>20</td><td>43</td><td>Ø 47.3</td></tr> </tbody> </table>	thread M	cable-Ø D min.	cable-Ø D max.	shield-Ø B min.	shield-Ø B max.	SW	E	20	6.5	9.5	3.5	8.5	22	Ø 24.4	20	4.0	6.5	2.5	6.5	22	Ø 24.4	20	7	10.5	6.5	10.5	22	Ø 24.4	20	9	13	6.5	10.5	22	Ø 24.4	25	6.5	9.5	3	8	28	Ø 31.2	25	9	13	4.8	8	28	Ø 31.2	32	11.5	15.5	8	13.5	35	Ø 38.5	32	14	18	9	14.5	35	Ø 38.5	40	17	20.5	15	20	43	Ø 47.3	40	20	25	15	20	43	Ø 47.3				
	thread M	cable-Ø D min.	cable-Ø D max.	shield-Ø B min.	shield-Ø B max.	SW	E																																																																												
20	6.5	9.5	3.5	8.5	22	Ø 24.4																																																																													
20	4.0	6.5	2.5	6.5	22	Ø 24.4																																																																													
20	7	10.5	6.5	10.5	22	Ø 24.4																																																																													
20	9	13	6.5	10.5	22	Ø 24.4																																																																													
25	6.5	9.5	3	8	28	Ø 31.2																																																																													
25	9	13	4.8	8	28	Ø 31.2																																																																													
32	11.5	15.5	8	13.5	35	Ø 38.5																																																																													
32	14	18	9	14.5	35	Ø 38.5																																																																													
40	17	20.5	15	20	43	Ø 47.3																																																																													
40	20	25	15	20	43	Ø 47.3																																																																													
	<table border="1"> <tbody> <tr><td>19 62 000 5080</td><td>20</td><td>6.5</td><td>9.5</td><td>3.5</td><td>8.5</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>19 62 000 5081</td><td>20</td><td>4.0</td><td>6.5</td><td>2.5</td><td>6.5</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>19 62 000 5082</td><td>20</td><td>7</td><td>10.5</td><td>6.5</td><td>10.5</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>19 62 000 5084</td><td>20</td><td>9</td><td>13</td><td>6.5</td><td>10.5</td><td>22</td><td>Ø 24.4</td></tr> <tr><td>19 62 000 5090</td><td>25</td><td>6.5</td><td>9.5</td><td>3</td><td>8</td><td>28</td><td>Ø 31.2</td></tr> <tr><td>19 62 000 5092</td><td>25</td><td>9</td><td>13</td><td>4.8</td><td>8</td><td>28</td><td>Ø 31.2</td></tr> <tr><td>19 62 000 5094</td><td>32</td><td>11.5</td><td>15.5</td><td>8</td><td>13.5</td><td>35</td><td>Ø 38.5</td></tr> <tr><td>19 62 000 5096</td><td>32</td><td>14</td><td>18</td><td>9</td><td>14.5</td><td>35</td><td>Ø 38.5</td></tr> <tr><td>19 62 000 5097</td><td>40</td><td>17</td><td>20.5</td><td>15</td><td>20</td><td>43</td><td>Ø 47.3</td></tr> <tr><td>19 62 000 5098</td><td>40</td><td>20</td><td>25</td><td>15</td><td>20</td><td>43</td><td>Ø 47.3</td></tr> </tbody> </table>	19 62 000 5080	20	6.5	9.5	3.5	8.5	22	Ø 24.4	19 62 000 5081	20	4.0	6.5	2.5	6.5	22	Ø 24.4	19 62 000 5082	20	7	10.5	6.5	10.5	22	Ø 24.4	19 62 000 5084	20	9	13	6.5	10.5	22	Ø 24.4	19 62 000 5090	25	6.5	9.5	3	8	28	Ø 31.2	19 62 000 5092	25	9	13	4.8	8	28	Ø 31.2	19 62 000 5094	32	11.5	15.5	8	13.5	35	Ø 38.5	19 62 000 5096	32	14	18	9	14.5	35	Ø 38.5	19 62 000 5097	40	17	20.5	15	20	43	Ø 47.3	19 62 000 5098	40	20	25	15	20	43	Ø 47.3		
19 62 000 5080	20	6.5	9.5	3.5	8.5	22	Ø 24.4																																																																												
19 62 000 5081	20	4.0	6.5	2.5	6.5	22	Ø 24.4																																																																												
19 62 000 5082	20	7	10.5	6.5	10.5	22	Ø 24.4																																																																												
19 62 000 5084	20	9	13	6.5	10.5	22	Ø 24.4																																																																												
19 62 000 5090	25	6.5	9.5	3	8	28	Ø 31.2																																																																												
19 62 000 5092	25	9	13	4.8	8	28	Ø 31.2																																																																												
19 62 000 5094	32	11.5	15.5	8	13.5	35	Ø 38.5																																																																												
19 62 000 5096	32	14	18	9	14.5	35	Ø 38.5																																																																												
19 62 000 5097	40	17	20.5	15	20	43	Ø 47.3																																																																												
19 62 000 5098	40	20	25	15	20	43	Ø 47.3																																																																												

Stock items in bold type










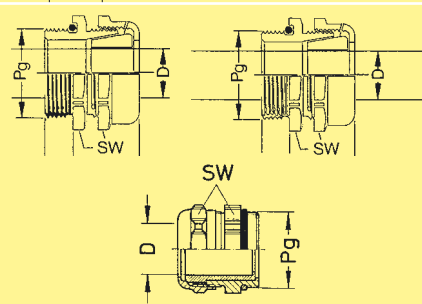
Accessories

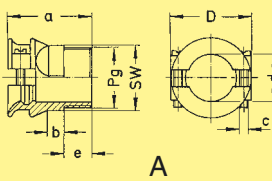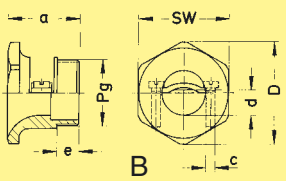




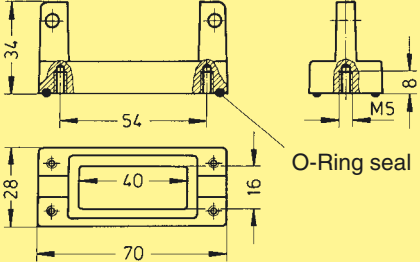
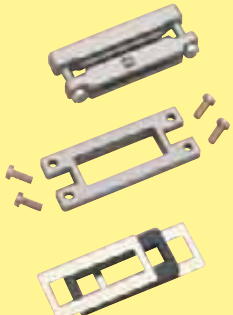



Identification	Part No.	Pg	Drawing	Dimensions in mm																																																																																																																																																																																																
<b>Special cable clamp</b> metal, with bell-mouth cable fitting and strain relief  for Standard Hoods/Housings <div style="display: flex; justify-content: space-around; align-items: center;">   </div>	Style A <b>09 00 000 5101</b> Style B <b>09 00 000 5102</b> Style B <b>09 00 000 5103</b> Style A <b>09 00 000 5104</b> Style A <b>09 00 000 5106</b>	11 13.5 16 21 29																																																																																																																																																																																																		
for Hoods/Housings Han® M <div style="display: flex; justify-content: space-around; align-items: center;">  </div>	Style B <b>09 37 000 5101</b> Style B <b>09 37 000 5104</b> Style B <b>09 37 000 5106</b>	11 21 29																																																																																																																																																																																																		
<b>Special cable clamp</b> brass, with strain relief <div style="display: flex; justify-content: space-around; align-items: center;">  </div>	Style C <b>09 00 000 5196</b> Style C <b>09 00 000 5197</b>	36 42	<table border="1"> <thead> <tr> <th rowspan="2">Style</th> <th rowspan="2">PG</th> <th rowspan="2">SW</th> <th rowspan="2">a</th> <th rowspan="2">c</th> <th colspan="2">d</th> <th rowspan="2">D</th> <th rowspan="2">e</th> <th rowspan="2">f</th> </tr> <tr> <th>min.</th> <th>max.</th> </tr> </thead> <tbody> <tr><td>A</td><td>11</td><td>19</td><td>26.6</td><td>M3</td><td>6</td><td>11</td><td>23</td><td>9</td><td>—</td></tr> <tr><td>A</td><td>13.5</td><td>22</td><td>31</td><td>M3</td><td>9</td><td>14</td><td>28</td><td>10</td><td>—</td></tr> <tr><td>A</td><td>16</td><td>24</td><td>33</td><td>M4</td><td>10</td><td>16</td><td>30</td><td>9.5</td><td>—</td></tr> <tr><td>A</td><td>21</td><td>30</td><td>39.5</td><td>M4</td><td>13.5</td><td>21</td><td>37</td><td>12</td><td>—</td></tr> <tr><td>A</td><td>29</td><td>41</td><td>49</td><td>M5</td><td>19</td><td>29</td><td>50</td><td>13</td><td>—</td></tr> <tr><td colspan="10"> </td></tr> <tr><td>B</td><td>13.5</td><td>28</td><td>22</td><td>M3</td><td>9</td><td>14</td><td>31.5</td><td>6.5</td><td>—</td></tr> <tr><td>B</td><td>16</td><td>30</td><td>23</td><td>M3</td><td>10</td><td>16</td><td>33.5</td><td>6.5</td><td>—</td></tr> <tr><td colspan="10"> </td></tr> <tr><td>C</td><td>36</td><td>52</td><td>25.3</td><td>—</td><td>25</td><td>37</td><td>—</td><td>9.5</td><td>—</td></tr> <tr><td>C</td><td>42</td><td>59</td><td>26.3</td><td>—</td><td>31</td><td>43</td><td>—</td><td>10</td><td>—</td></tr> <tr><td colspan="10"> </td></tr> <tr><td>D</td><td>11</td><td>19</td><td>35</td><td>M3</td><td>6</td><td>11</td><td>33</td><td>9</td><td>35</td></tr> <tr><td>D</td><td>13.5</td><td>22</td><td>36.5</td><td>M3</td><td>7.5</td><td>14</td><td>36</td><td>10</td><td>39</td></tr> <tr><td>D</td><td>16</td><td>24</td><td>40</td><td>M4</td><td>10</td><td>16</td><td>38</td><td>10</td><td>45</td></tr> <tr><td>D</td><td>21</td><td>30</td><td>47.5</td><td>M4</td><td>12.5</td><td>21</td><td>46</td><td>12</td><td>51</td></tr> <tr><td>D</td><td>29</td><td>41</td><td>55.5</td><td>M5</td><td>17</td><td>29</td><td>60</td><td>13</td><td>64</td></tr> <tr><td>D</td><td>36</td><td>50</td><td>62</td><td>M5</td><td>20.5</td><td>36</td><td>76</td><td>13</td><td>72</td></tr> </tbody> </table>		Style	PG	SW	a	c	d		D	e	f	min.	max.	A	11	19	26.6	M3	6	11	23	9	—	A	13.5	22	31	M3	9	14	28	10	—	A	16	24	33	M4	10	16	30	9.5	—	A	21	30	39.5	M4	13.5	21	37	12	—	A	29	41	49	M5	19	29	50	13	—											B	13.5	28	22	M3	9	14	31.5	6.5	—	B	16	30	23	M3	10	16	33.5	6.5	—											C	36	52	25.3	—	25	37	—	9.5	—	C	42	59	26.3	—	31	43	—	10	—											D	11	19	35	M3	6	11	33	9	35	D	13.5	22	36.5	M3	7.5	14	36	10	39	D	16	24	40	M4	10	16	38	10	45	D	21	30	47.5	M4	12.5	21	46	12	51	D	29	41	55.5	M5	17	29	60	13	64	D	36	50	62	M5	20.5	36	76	13	72
Style	PG	SW	a	c						d					D	e	f																																																																																																																																																																																			
					min.	max.																																																																																																																																																																																														
A	11	19	26.6	M3	6	11	23	9	—																																																																																																																																																																																											
A	13.5	22	31	M3	9	14	28	10	—																																																																																																																																																																																											
A	16	24	33	M4	10	16	30	9.5	—																																																																																																																																																																																											
A	21	30	39.5	M4	13.5	21	37	12	—																																																																																																																																																																																											
A	29	41	49	M5	19	29	50	13	—																																																																																																																																																																																											
B	13.5	28	22	M3	9	14	31.5	6.5	—																																																																																																																																																																																											
B	16	30	23	M3	10	16	33.5	6.5	—																																																																																																																																																																																											
C	36	52	25.3	—	25	37	—	9.5	—																																																																																																																																																																																											
C	42	59	26.3	—	31	43	—	10	—																																																																																																																																																																																											
D	11	19	35	M3	6	11	33	9	35																																																																																																																																																																																											
D	13.5	22	36.5	M3	7.5	14	36	10	39																																																																																																																																																																																											
D	16	24	40	M4	10	16	38	10	45																																																																																																																																																																																											
D	21	30	47.5	M4	12.5	21	46	12	51																																																																																																																																																																																											
D	29	41	55.5	M5	17	29	60	13	64																																																																																																																																																																																											
D	36	50	62	M5	20.5	36	76	13	72																																																																																																																																																																																											
<b>Special cable clamp</b> thermoplastic, with bell-mouth cable fitting and strain relief <div style="display: flex; justify-content: space-around; align-items: center;">  </div>	Style D <b>09 00 000 5165</b> Style D <b>09 00 000 5166</b> Style D <b>09 00 000 5167</b> Style D <b>09 00 000 5168</b> Style D <b>09 00 000 5169</b> Style D <b>09 00 000 5170</b>	11 13.5 16 21 29 36																																																																																																																																																																																																		
<b>Normal seal</b> <div style="display: flex; justify-content: space-around; align-items: center;">  </div>	<b>09 00 000 5020</b> 09 00 000 5021 <b>09 00 000 5022</b> <b>09 00 000 5023</b> <b>09 00 000 5024</b> 09 00 000 5025	11 13.5 16 21 29 36	<table border="1"> <thead> <tr> <th rowspan="2">cable ø</th> <th colspan="2">min. max.</th> </tr> </thead> <tbody> <tr><td>10</td><td>12</td><td></td></tr> <tr><td>12</td><td>14</td><td></td></tr> <tr><td>14</td><td>16</td><td></td></tr> <tr><td>19</td><td>21</td><td></td></tr> <tr><td>28</td><td>30</td><td></td></tr> <tr><td>35</td><td>37</td><td></td></tr> </tbody> </table>	cable ø	min. max.		10	12		12	14		14	16		19	21		28	30		35	37																																																																																																																																																																													
cable ø	min. max.																																																																																																																																																																																																			
	10	12																																																																																																																																																																																																		
12	14																																																																																																																																																																																																			
14	16																																																																																																																																																																																																			
19	21																																																																																																																																																																																																			
28	30																																																																																																																																																																																																			
35	37																																																																																																																																																																																																			
<b>Multiple seal</b> <div style="display: flex; justify-content: space-around; align-items: center;">  </div>	<b>09 00 000 5027</b> <b>09 00 000 5028</b> <b>09 00 000 5029</b> <b>09 00 000 5030</b> <b>09 00 000 5031</b> 09 00 000 5032	11 13.5 16 21 29 36	<table border="1"> <thead> <tr> <th rowspan="2">cable ø</th> <th colspan="2">min. max.</th> </tr> </thead> <tbody> <tr><td>6,5</td><td>12</td><td></td></tr> <tr><td>6,5</td><td>13,5</td><td></td></tr> <tr><td>6,5</td><td>16</td><td></td></tr> <tr><td>9</td><td>20</td><td></td></tr> <tr><td>17</td><td>28</td><td></td></tr> <tr><td>23</td><td>34</td><td></td></tr> </tbody> </table>	cable ø	min. max.		6,5	12		6,5	13,5		6,5	16		9	20		17	28		23	34																																																																																																																																																																													
cable ø	min. max.																																																																																																																																																																																																			
	6,5	12																																																																																																																																																																																																		
6,5	13,5																																																																																																																																																																																																			
6,5	16																																																																																																																																																																																																			
9	20																																																																																																																																																																																																			
17	28																																																																																																																																																																																																			
23	34																																																																																																																																																																																																			

Stock items in bold type













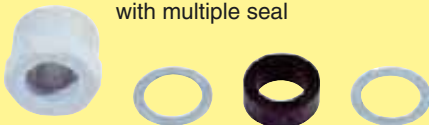
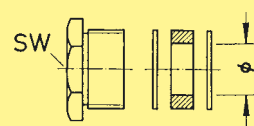





Identification	Part No.	Pg	Drawing	Dimensions in mm
<b>Cable seal thermoplastic (IP 65)</b> with multiple seal 	grey <b>09 00 000 5164</b>	11	SW   cable ø min.   max. 19   10   12	
	black 09 00 000 5185	11	19   10   12	
<b>Cable seal metal (IP 65)</b> with normal seal 	<b>09 00 000 5113</b>	11	SW   cable ø min.   max. 18   10   12	
	<b>09 00 000 5114</b>	13.5	20   12   14	
	<b>09 00 000 5115</b>	16	22   14   16	
	<b>09 00 000 5116</b>	21	28   19   21	
	<b>09 00 000 5117</b>	29	37   28   30	
	09 00 000 5146	36	47   35   37	
	09 00 000 5119	42	54   41   43	
<b>Cable seal metal (IP 65)</b> with multiple seal 	<b>09 00 000 5013</b>	11	SW   cable ø min.   max. 18   6.5   12	
	<b>09 00 000 5014</b>	13.5	20   6.5   13.5	
	<b>09 00 000 5015</b>	16	22   6.5   16	
	<b>09 00 000 5016</b>	21	28   9   20	
	<b>09 00 000 5017</b>	29	37   17   28	
	09 00 000 5018	36	47   23   34	
	09 00 000 5019	42	54   29   40	
<b>Universal cable protection (IP 68)</b> Metal 	<b>09 00 000 5080</b>	11	Colour   SW   cable ø D min.   max. grey   20   5   8	
	<b>09 00 000 5081</b>	11	black   20   6.5   9.5	
	<b>09 00 000 5082</b>	11	green   20   7   10.5	
	<b>09 00 000 5083</b>	13.5	black   22   6.5   9.5	
	<b>09 00 000 5084</b>	13.5	green   22   7   10.5	
	<b>09 00 000 5085</b>	13.5	red   22   9   13	
	<b>09 00 000 5086</b>	16	black   24   6   9.5	
	09 00 000 5087	16	green   24   7   10.5	
	<b>09 00 000 5088</b>	16	red   24   9   13	
	<b>09 00 000 5089</b>	16	white   24   11.5   15.5	
	<b>09 00 000 5090</b>	21	green   30   7   10.5	
	<b>09 00 000 5091</b>	21	red   30   9   13	
	<b>09 00 000 5092</b>	21	white   30   11.5   15.5	
	<b>09 00 000 5093</b>	21	blue   30   14   18	
	<b>09 00 000 5094</b>	29	blue   40   14   18	
	<b>09 00 000 5095</b>	29	brown   40   17   21	
	<b>09 00 000 5096</b>	29	orange   40   20   25	
<b>09 00 000 5097</b>	29	light yellow   40   24   28		
09 00 000 5098	36	light blue   50   29   34		
09 00 000 5099	36	pink   50   32   36		
<b>Cable entry protection MS</b> Metal 	09 00 000 5183	11	SW   cable ø D min.   max. 21   7   12	
	Thermoplastic 09 00 000 5182	11	24   7   12	
	Thermoplastic <b>09 00 000 5153</b>	11	33   13   18	

Accessories

Identification	Part No.	Pg	Drawing	Dimensions in mm																																																																															
<b>EMC clamp (IP 68)</b> 	<b>09 62 000 5023</b>	11	<table border="1"> <thead> <tr> <th rowspan="2">SW</th> <th colspan="2">Shield Ø B</th> <th colspan="2">cable Ø D</th> </tr> <tr> <th>min.</th> <th>max.</th> <th>min.</th> <th>max.</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>2.5</td> <td>6.5</td> <td>4</td> <td>6.5</td> </tr> <tr> <td><b>20</b></td> <td><b>3.5</b></td> <td><b>8.5</b></td> <td><b>6.5</b></td> <td><b>8.5</b></td> </tr> <tr> <td><b>22</b></td> <td><b>6.5</b></td> <td><b>10.5</b></td> <td><b>8</b></td> <td><b>10.5</b></td> </tr> <tr> <td>22</td> <td>2.5</td> <td>6.5</td> <td>6.5</td> <td>9.5</td> </tr> <tr> <td>22</td> <td>6.5</td> <td>10.5</td> <td>9</td> <td>13</td> </tr> <tr> <td><b>24</b></td> <td><b>3.5</b></td> <td><b>8</b></td> <td><b>6.5</b></td> <td><b>9.5</b></td> </tr> <tr> <td><b>24</b></td> <td><b>4.5</b></td> <td><b>8</b></td> <td><b>9</b></td> <td><b>13</b></td> </tr> <tr> <td><b>30</b></td> <td><b>9.5</b></td> <td><b>13.5</b></td> <td><b>11.5</b></td> <td><b>15.5</b></td> </tr> <tr> <td><b>30</b></td> <td><b>10.5</b></td> <td><b>14.5</b></td> <td><b>14</b></td> <td><b>18</b></td> </tr> <tr> <td><b>40</b></td> <td><b>15</b></td> <td><b>20</b></td> <td><b>17</b></td> <td><b>20.5</b></td> </tr> <tr> <td><b>40</b></td> <td><b>15</b></td> <td><b>20</b></td> <td><b>20</b></td> <td><b>25</b></td> </tr> <tr> <td>09 62 000 5011</td> <td>36</td> <td>50</td> <td>18</td> <td>25.5</td> <td>24</td> <td>28</td> </tr> <tr> <td>09 62 000 5012</td> <td>36</td> <td>50</td> <td>24</td> <td>31</td> <td>27</td> <td>32</td> </tr> </tbody> </table> 	SW	Shield Ø B		cable Ø D		min.	max.	min.	max.	20	2.5	6.5	4	6.5	<b>20</b>	<b>3.5</b>	<b>8.5</b>	<b>6.5</b>	<b>8.5</b>	<b>22</b>	<b>6.5</b>	<b>10.5</b>	<b>8</b>	<b>10.5</b>	22	2.5	6.5	6.5	9.5	22	6.5	10.5	9	13	<b>24</b>	<b>3.5</b>	<b>8</b>	<b>6.5</b>	<b>9.5</b>	<b>24</b>	<b>4.5</b>	<b>8</b>	<b>9</b>	<b>13</b>	<b>30</b>	<b>9.5</b>	<b>13.5</b>	<b>11.5</b>	<b>15.5</b>	<b>30</b>	<b>10.5</b>	<b>14.5</b>	<b>14</b>	<b>18</b>	<b>40</b>	<b>15</b>	<b>20</b>	<b>17</b>	<b>20.5</b>	<b>40</b>	<b>15</b>	<b>20</b>	<b>20</b>	<b>25</b>	09 62 000 5011	36	50	18	25.5	24	28	09 62 000 5012	36	50	24	31	27	32		
	SW	Shield Ø B			cable Ø D																																																																														
		min.		max.	min.	max.																																																																													
	20	2.5		6.5	4	6.5																																																																													
	<b>20</b>	<b>3.5</b>		<b>8.5</b>	<b>6.5</b>	<b>8.5</b>																																																																													
	<b>22</b>	<b>6.5</b>		<b>10.5</b>	<b>8</b>	<b>10.5</b>																																																																													
	22	2.5		6.5	6.5	9.5																																																																													
	22	6.5		10.5	9	13																																																																													
	<b>24</b>	<b>3.5</b>		<b>8</b>	<b>6.5</b>	<b>9.5</b>																																																																													
	<b>24</b>	<b>4.5</b>		<b>8</b>	<b>9</b>	<b>13</b>																																																																													
	<b>30</b>	<b>9.5</b>		<b>13.5</b>	<b>11.5</b>	<b>15.5</b>																																																																													
	<b>30</b>	<b>10.5</b>		<b>14.5</b>	<b>14</b>	<b>18</b>																																																																													
	<b>40</b>	<b>15</b>		<b>20</b>	<b>17</b>	<b>20.5</b>																																																																													
<b>40</b>	<b>15</b>	<b>20</b>	<b>20</b>	<b>25</b>																																																																															
09 62 000 5011	36	50	18	25.5	24	28																																																																													
09 62 000 5012	36	50	24	31	27	32																																																																													
<b>Bracket for flat cable for separate mounting</b> 	09 00 000 5325																																																																																		
<b>Set of seals with strain relief clamp</b> 	for 1 flat cable <b>09 00 000 5315</b>	—																																																																																	
	for 2 flat cables 09 00 000 5316	—																																																																																	
	for 3 flat cables 09 00 000 5317	—																																																																																	

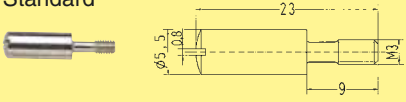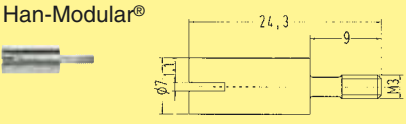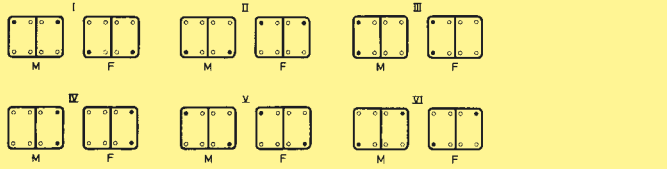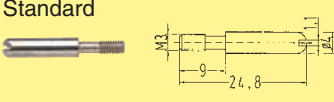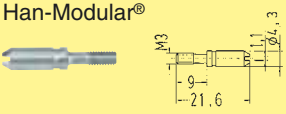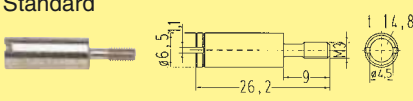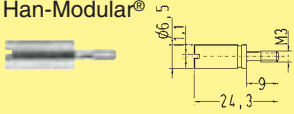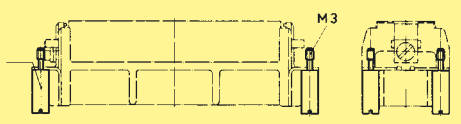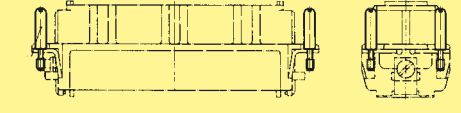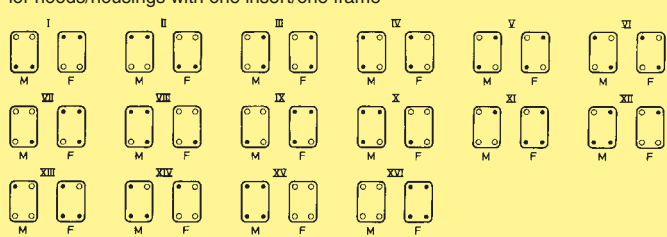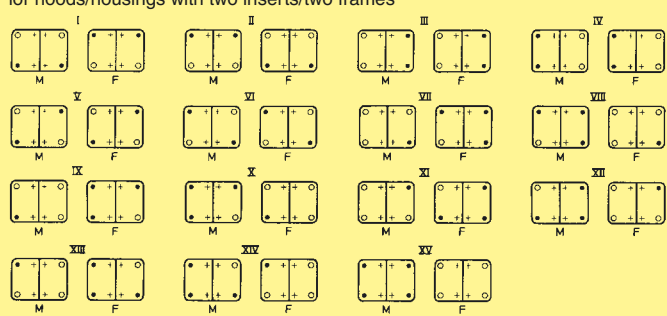Stock items in bold type



Identification	Part No.	Drawing	Dimensions in mm
<b>Coding system with code pins</b>  Standard   Han-Modular® 	<b>09 30 000 9901<sup>1)</sup></b>  <b>09 14 000 9901<sup>1)</sup></b>	for hoods/housings with one insert/one frame   for hoods/housings with two inserts/two frames   ● Code pins ○ Normal mounting screw M – Male connector F – Female connector	
<b>Coding system with guide pins and bushes</b>  Guide pin Standard   Han-Modular®   Bush Standard   Han-Modular® 	<b>09 33 000 9908<sup>1)</sup></b>  <b>09 14 000 9908<sup>1)</sup></b>  <b>09 33 000 9909<sup>1)</sup></b>  <b>09 14 000 9909<sup>1)</sup></b>	This system is used to guard against angled coupling and decoupling of the connector. The maximum permitted angle according to DIN EN 175301-801 is $\pm 5^\circ$ (longitudinally).  09 33 000 9909   09 33 000 9908   for hoods/housings with one insert/one frame   for hoods/housings with two inserts/two frames   ● Guide pin ○ Bush + Normal mounting screw M – Male connector F – Female connector	
1) Order 4 pieces for one connector  <b>Accessories</b>  <b>Coding Pin</b> for Han E®, Han® EE Han® Q 5/0, Han® Q 8/0 	<b>09 33 000 9954</b>	 <p>Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.</p> 	
<b>Coding system with loss of contact</b> for Han D®, Han DD® 	<b>09 33 000 9915</b>	Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.  	

3 x




Multiple ground connection

Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

PE-Multiple ground connection

**09 33 000 9992**

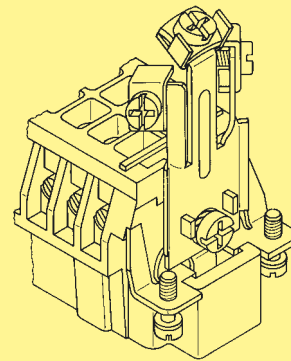

### Features

- 3 PE-terminations
- Screws with ± head
- Self lifting washer
- Suitable for use with all inserts of the Han® 6 B to 24 B size (except Han® ESS-inserts)
- Suitable in hood high construction

### Technical characteristics

Termination points	3
Termination wire gauge	0.5–2.5 mm <sup>2</sup> AWG 20-14
Material	copper alloy
Surface	Ni
Contact resistance	≤ 3 m Ω


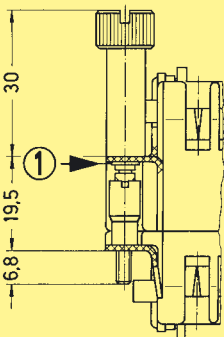
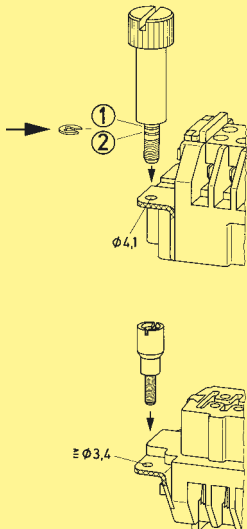




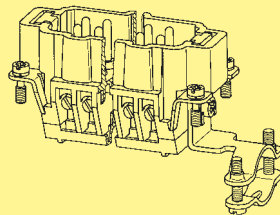
### Application

The PE-multiple ground connection may be used to terminate three PE-wires on one connector.  
Each PE-wire can be terminated and removed separately.  
(acc. VDE 0113 DIN EN 60204 Pt. 14.1.1).

### Pack contents

- Delivery comprises
- Multiple ground connection
  - Fixing screw M4 with washer

## Security accessories

Identification	Part No.	Drawing	Dimensions in mm
<p>Screw pin<sup>1)</sup></p> 	<b>09 33 000 9910</b>	<p>When using inserts without hoods or housings and requiring a locking facility this system is suitable for all rectangular connectors of the Han® B series.</p> <p>For each connector we recommend two screw pins and two bushes as shown which are fitted diagonally to the inserts instead of the ordinary fixing screws. Holes for fixing to be drilled as shown.</p> <p>Mounting example</p> 	
<p>Bush<sup>1)</sup></p> 	<b>09 33 000 9912</b>		
<p><sup>1)</sup> order 2 pieces for one connector</p>			
<p>Straight cable clamp fitting</p> 	<b>09 00 000 5340</b>		<p>Clamping range of strain relief clamp: 9 - 19 mm</p>
<p>Angled cable clamp fitting</p> 	<b>09 00 000 5339</b>		

## Features

When using inserts without hoods or housings and requiring a strain relief this system is suitable for all rectangular connectors of series Han DD®, Han® 40-64 D, Han E®/ Han® ES, Han® HsB, Han Hv E® / Han® Hv ES, Han® EE, Han® K 8/24. Fitted at the opposite end to the PE-termination.

## Pack contents

Delivery comprises

- Cable clamp fitting with 2 screws M3
- Fixing screw M4 with washer

Stock items in bold type



Identification	Size	Part No.	Drawing	Dimensions in mm
Grip frame	24 B	09 00 024 5601		
Grip frame with screw adapter and screw	24 B	09 00 024 5611*		
* to use in connection with 09 00 000 5602				
Screw adapter bulkhead mounting		09 00 000 5602*		
* to use in connection with 09 00 024 5611				

## Features

- Grip frame suitable for Han® 64 D, 108 DD  
Han® 24 E, ES, ESS  
Han® 46 EE
- Multiple shield connections via grip frame
- Cable can be fixed with clamps or cable tie

## Technical characteristics

Grip frame - Surface	8 µm Zn
Adapter - Surface	Die cast zinc alloy 5 µ Ni over 8 µ Cu

## Application

The grip frame can be used for termination of several shielded cables to be fixed on one connector.

Accessories

Identification	Size	Part No.	Drawing	Dimensions in mm
Clamps for shield-lever and clamp frame for shielded cables		09 00 000 5341		
		09 00 000 5342		

40  
16

Stock items in bold type



Identification	Size	Part No.	Drawing	Dimensions in mm
<b>Ground terminal</b> for Han E®, Han® EE and Han DD® in housings and hoods, high construction, and Han-Snap®	6 B	<b>09 00 000 5206</b>		
	10 B	<b>09 00 000 5207</b>		
	16 B	<b>09 00 000 5208</b>		
	24 B	<b>09 00 000 5210</b>		
	24 B	<b>09 00 000 5280</b>		

## Technical characteristics

Material: steel, zinc plated

## Pack contents

Ground terminal frame with M 4 screws  
for fixing at insert

Identification	Part No.	Drawing	Dimensions in mm
<b>Clamp</b> for ground terminal	<b>09 00 000 5341</b>  <b>09 00 000 5342</b>	cable Ø  5 mm	
		10 mm	

Stock items in bold type

Identification	Size	Part No.	Drawing	Dimensions in mm
Ground terminal for Han-Modular® in housings bulkhead mounting	6 B	09 00 000 5256		
	10 B	09 00 000 5257		
	16 B	09 00 000 5258		
	24 B	<b>09 00 000 5211</b>		
PE terminal for Han-Modular® in housings and hoods, high construction	24 B	09 00 000 5209		

## Technical characteristics


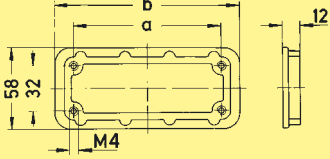
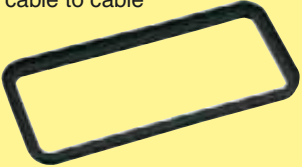



Material: steel, zinc plated

Accessories	Identification	Part No.	Drawing	Dimensions in mm
	Clamps for ground terminals			cable Ø
		<b>09 00 000 5341</b>	5 mm	
	<b>09 00 000 5342</b>	10 mm		

Identification	Size	Part No.	Drawing	Dimensions in mm
<b>PE-screw</b> for Han A®, Han® 15, 25 D	M 3.5	09 20 000 9919		
for Han E® etc. 	M 4	<b>09 33 000 9925</b>		
for Han-Com®, Han® HsB	M 5	09 33 000 9926		
<b>Insert fixing screw</b> 	M 3	09 16 000 9903		
<b>Contact screw</b> for Staf®, Han® 3 A, 4 A 	M 3	09 30 000 9997		
<b>Han® 3 A Insert fixing screw</b> 	M 3	<b>09 20 000 9995</b>		
<b>Han® 3 A Insert fixing screw</b> 	M 3 IP 65	<b>09 20 000 9918</b>		
<b>Han-Compact® Insert fixing screw</b> 	BZ 2.9 x 9.5	09 12 000 9921		
<b>Han® HPR Locking screw</b> 	M 6	09 40 000 9932		
<b>Han® HPR Toggle locking screw</b> 	—	09 40 000 9931		

Identification	Size	Part No.	Drawing	Dimensions in mm
<b>Locking levers</b>  Han Easy-Lock® single levers  Han Easy-Lock® double levers	3 A	09 00 000 5241	grey black	
	3 A	09 00 000 5242		
	10 A	09 00 000 5224		
	16 A	<b>09 00 000 5225</b>		
	6 B	<b>09 00 000 5222</b>		
	10 B	<b>09 00 000 5228</b>		
	16 B	<b>09 00 000 5229</b>		
	24 B	<b>09 00 000 5230</b>		
	10/16/ 24 B	<b>09 00 000 5221</b>		
	32 A	<b>09 00 000 5223</b>		
32 B	<b>09 00 000 5231</b>			
<b>Locking element with cord</b> for Han Easy-Lock® double levers and Han® 10, 16, 24 B housings bulkhead mounting	10/16/ 24 B	<b>09 30 000 9986</b>		
<b>Bearing pedestal</b> for Han® 10 A, 16 A, 32 A 6 B, 10 B, 16 B, 24 B		09 30 000 9964		
<b>Thermoplastic cover</b> for bearing pedestal	10 A 16 A  6 B 10 B 16 B 24 B	09 20 010 5410 09 20 016 5410  09 30 006 5410 09 30 010 5410 09 30 016 5410 09 30 024 5410		
<b>Dust protection cover</b>	10 16 24	<b>09 30 010 5406</b> <b>09 30 016 5406</b> <b>09 30 024 5406</b>		
<b>Metal cover</b> for bearing pedestal	6 B 10 B 16 B 24 B	09 30 006 5403 09 30 010 5404 09 30 016 5404 09 30 024 5404		

Stock items in bold type

Identification	Size	Part No.	Drawing	Dimensions in mm															
<b>Mounting frames</b> for standard housings 	6 B	09 40 000 9921	 <table border="1"> <thead> <tr> <th>Size</th> <th>a</th> <th>b</th> </tr> </thead> <tbody> <tr> <td>6 B</td> <td>70</td> <td>96</td> </tr> <tr> <td>10 B</td> <td>83</td> <td>109</td> </tr> <tr> <td>16 B</td> <td>103</td> <td>129</td> </tr> <tr> <td>24 B</td> <td>130</td> <td>156</td> </tr> </tbody> </table>	Size	a	b	6 B	70	96	10 B	83	109	16 B	103	129	24 B	130	156	
	Size	a		b															
	6 B	70		96															
	10 B	83		109															
	16 B	103		129															
24 B	130	156																	
10 B	09 40 000 9922																		
16 B	09 40 000 9923																		
24 B	09 40 000 9924																		
Identification	Size	Material NBR	Part No. Material FPM																
<b>L-seal</b> for Hoods cable to cable 	10 B	09 30 000 9935																	
	16 B	09 30 000 9934																	
	24 B	09 30 000 9933																	
<b>Gasket</b> 	Modular Compact	09 14 000 9940																	
	3 A	<b>09 20 000 9991</b>	09 37 000 9912																
	10 A	09 20 000 9992																	
	16 A	09 20 000 9993																	
	32 A	09 20 000 9994																	
	6 B	<b>09 30 000 9991</b>																	
	10 B	<b>09 30 000 9992</b>																	
	16 B	<b>09 30 000 9993</b>	09 37 000 9948																
	24 B	<b>09 30 000 9994</b>	09 37 000 9949																
	<b>Profile seal</b> 	3 A	<b>09 70 000 9991</b>	09 21 000 9906															
10 A		09 20 000 9996																	
16 A		09 20 000 9997																	
6 B		09 30 000 9941																	
10 B		09 30 000 9942																	
16 B		09 30 000 9943																	
24 B		09 30 000 9944																	
<b>Han® HPR</b> O-ring-sealing 	3 HPR	09 40 000 9910																	
	6 HPR	09 40 000 9911																	
	10 HPR	09 40 000 9912																	
	16 HPR	09 40 000 9913																	
	24 HPR	09 40 000 9914																	

