


Capacitor, Tantalum, SMD, Polymer, Molded, Low ESR, AEC-Q200, 100 uF, 7343, +/-20% Tol, 10 VDC (105C)

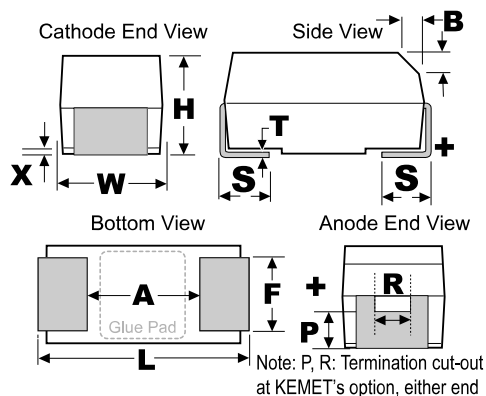

Dimensions (mm)

Symbol	Dimension	Tolerance
L	7.3	+/-0.3
W	4.3	+/-0.3
H	2.8	+/-0.3
F	2.4	+/-0.1
S	1.3	+/-0.3
B	0.5	+/-0.15
X	0.1	+/-0.1
P	0.9	REF
R	1	REF
T	0.13	REF
A	3.8	MIN

Packaging Specifications

Package Kind:	T&R
Package Size:	7in
Package Quantity:	500

General Information

Supplier:	KEMET
Brand:	Kemet
Application:	Automotive/Low ESR (AEC-Q200 Qualified)
Sub Application:	(NonCombustibleCathode)
Part Type Description:	SMD, Polymer, Molded, Low ESR, AEC-Q200
Construction:	Standard Chip-Polymer
Body Type:	Molded Chip
Footprint:	7343
Weight:	434.83 mg
RoHS:	Yes

Specifications

Capacitance:	100 uF
Tolerance:	+/-20%
Voltage:	10 VDC (105C)
Voltage:	6.7 VDC (125C)
Temperature Range:	-55/+125C
Testing:	AEC-Q200
Current/Ripple Current:	1677 mA (25C)
Current/Ripple Current:	1509.3 mA (85C)
Current/Ripple Current:	419.3 mA (125C)
Resistance/ESR:	80 mOhms (100kHz)
Failure Rate:	NA
Leakage Current:	100 uA
Dissipation Factor:	10%