


Link module for motor starters up to 15 kW/400 V

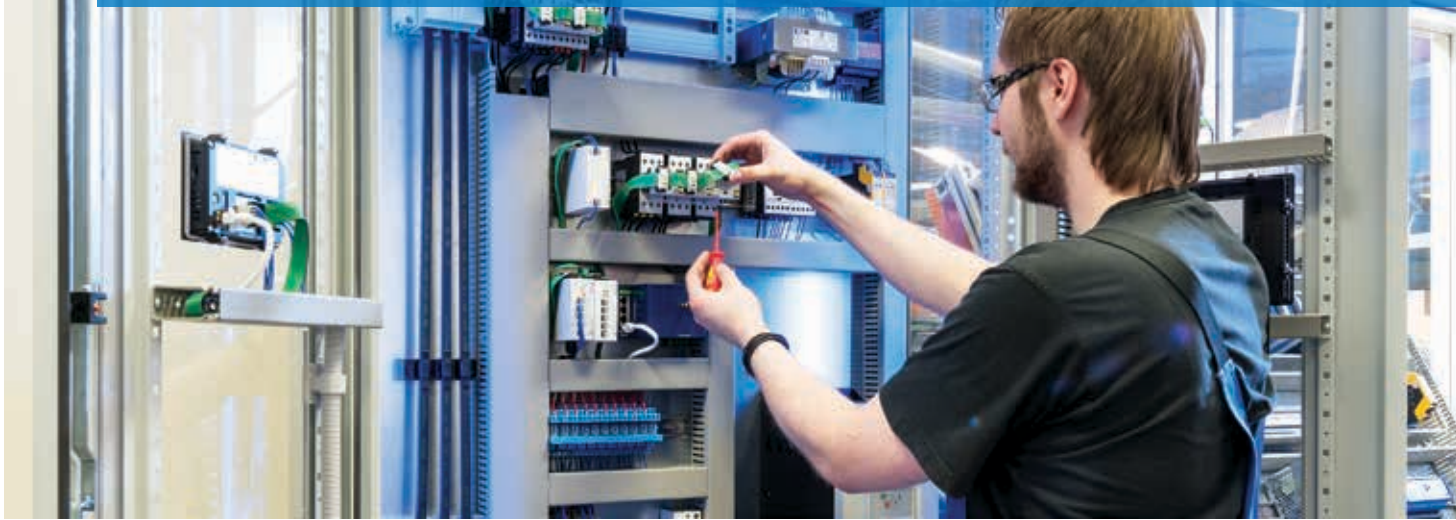

Save time and space thanks to the PKZM0-XDM32ME link module

Link module


Motor starter combinations up to 15 kW power rating consisting of a manual motor starter and circuit breaker, can be built with improved time-saving properties and a more compact design using the new link module PKZM0-XDM32ME.

The new link module allows manual motor starters PKZM0 / PKE12 / PKE32 to be combined with circuit breakers DILM17...38 or soft starter

DS7 16 A to 32 A power rating and also construction of direct and reversing motor starters.

The components of the motor starter are connected electrically and mechanically by the link module, so the motor starter only needs to be mounted on one support rail.


The new link module offers the following advantages:



Approvals



Note: When using the DILM32-XRL reversing wiring set and DILM32-XVB mechanical connector



Compact design

30 mm reduction in overall height and 25 mm reduction in overall depth



Universal

Jointly feeds motor starters of various sizes



Safer



IP20 finger-safe in the connection area



Powering Business Worldwide


Eaton's solution for connection technology in motor starter combinations up to 15 kW / 400 V

Connection technology: Motor starter with a rotational direction

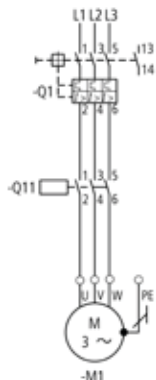

Name	MVS-LBM0-EM	PKZM0-XDM15ME	PKZM0-XDM12	PKZM0-XM32DE	PKZM0-XDM32ME
SAP no.:	220219	179646	283149	239349	190312
Usable up to:	5,5kW	7,5kW	7,5kW	15kW	15 kW
Switch for motor protection	PKZM0, (PKZM01)	PKZM0, PKE12, PKE32	PKZM0, PKE12, PKE32	PKZM0, PKE12, PKE32	PKZM0, PKE12, PKE32
Contactor	DIL(E)M	DILM7...DILM15	DILM(C)7...15	DILM17...32	DILM17...38
Special feature	Screw connector for small contactors	Screw connector	Pluggable connector with cable routing, also for contactors with spring-loaded terminals	Electrical screw connector without mechanical properties	Screw connector
Application	Motor starter with low overall height	Motor starter on top-hat rail/ Busbar adaptor	Motor starter on top-hat rail/ Busbar adaptor	Motor starter on Busbar adaptor	Motor starter on top-hat rail or adaptor motor starter feed-in system

Connection technology: Motor starter with two rotational directions



Name	PKZM0-XRM12	PKZM0-XRM32	PKZM0-XDM32ME DILM32-XRL DILM32-XVB
SAP no.:	283185	283189	190312, 283109, 281227
Usable up to:	5,5kW	15kW	15kW
Switch for motor protection	PKZM0, PKE12, PKE32	PKZM0, PKE12, PKE32	PKZM0, PKE12, PKE32
Contactor	DILM7...15	DILM17...32	DILM17...38
Special feature	Pluggable connector with cable routing, also for contactors with spring-loaded terminals	Connector set with additional adapter plate	Direct mounting on support rail without additional adapter
Application	Motor starter on top-hat rail/Busbar adaptor	Motor starter on top-hat rail/Busbar adaptor	Motor starter on top-hat rail or adaptor motor starter feed-in system



Powering Business Worldwide

Eaton Industries GmbH
Hein-Moeller-Str. 7-11
D-53115 Bonn/Germany
www.eaton.de

© 2018 Eaton
All rights reserved
Printed in Germany 05/2017
Publication number:
FL034003EN / CSSC-1744
Part no.: 191980
October 2018

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.



Eaton is a registered trademark.

All other trademarks are property of their respective owners.