End Module

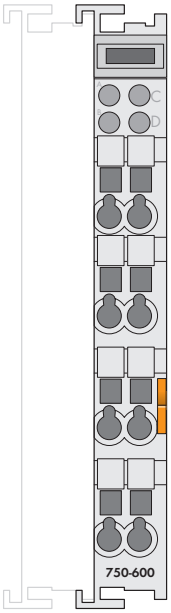

After the fieldbus node is assembled with the correct buscoupler and selected I/O modules, the end module is snapped onto the assembly.

It completes the internal data circuit and ensures correct data flow.

Description	Item No.	Pack. Unit
End Module	**750-600**	10[1]
End Module/T	**750-600/025-000**	1
(Operating temperature -20 °C ... +60 °C)		

[1] Also available individually

Accessories		Item No.	Pack. Unit
Miniature WSB Quick marking system			
	plain	**248-501**	5
	with marking	see www.wago.com	

Approvals

CE		
Shipbuilding	see "Approvals Overview" in section 1	
UL508		
ANSI/ ISA 12.12.01	Class I Div 2 ABCD T4	750-600
EN 60079-0, -1, -15	I M2 Ex d I	750-600*
EN 61241-0, -1	II 3 G Ex nA IIC T4	750-600*
	II 3 D Ex tD A22 IP6X T135°C	750-600*
	* Permissible operating temperature 0 °C ... +60 °C	

Note: For additional information on regulations and test results, see Section 12.

Technical Data	
Width	12 mm
Weight	33.5 g
EMC CE-Immunity to interference	acc. to EN 61000-6-2 (2005)
EMC CE-Emission of interference	acc. to EN 61000-6-4 (2007)
EMC marine applications - Immunity to interference	acc. to Germanischer Lloyd (2003)
EMC marine applications - Emission of interference	acc. to Germanischer Lloyd (2003)