

# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood



1197628

<https://www.phoenixcontact.com/in/products/1197628>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector hood, application: Sensor/actuator box, connection method: M8 socket Metal, number of slots: 8, number of positions: 3, slot assignment: single, status display: No, Universal; master cable connection: Pluggable screw connection 180°, PUR/PVC, cable length: 5 m, shielding: no

## Your advantages

- Flexible, distributed bundling of signals in one master cable

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1197628       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | *****         |
| Product key                          | AF3BCG        |
| GTIN                                 | 4063151257477 |
| Weight per piece (including packing) | 575 g         |
| Weight per piece (excluding packing) | 553 g         |
| Customs tariff number                | 85444290      |
| Country of origin                    | DE            |

## Technical data

### Notes

#### Assembly note

**NOTE:** Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.

### Product properties

|                     |                     |
|---------------------|---------------------|
| Product type        | Connector hood      |
| Application         | Sensor/actuator box |
| Number of positions | 3                   |
| Number of slots     | 8                   |

### Electrical properties

|   |         |
|---|---------|
| Max. operating voltage $U_{\max}$       | 30 V DC |
| Nominal voltage $U_N$                   | 24 V DC |
| Rated current, total                    | 8 A     |
| Max. current carrying capacity per path | 2 A     |
| Current carrying capacity per slot      | 2 A     |

### Connection data

#### Conductor connection

|                                   |                            |
|-----------------------------------|----------------------------|
| Sensor/actuator connection system | M8 socket                  |
| Connection method                 | Pluggable screw connection |
| Tightening torque, cover screw    | 1 Nm                       |

#### Pin assignment

|  |                               |
|--|-------------------------------|
| Slot/position = Wire color or connection | 1 / 4 (A) = 1 / 4 = WH        |
|  | 2 / 4 (A) = 2 / 4 = GN        |
|  | 3 / 4 (A) = 3 / 4 = YE        |
|  | 4 / 4 (A) = 4 / 4 = GY        |
|  | 5 / 4 (A) = 5 / 4 = PK        |
|  | 6 / 4 (A) = 6 / 4 = RD        |
|  | 7 / 4 (A) = 7 / 4 = BK        |
|  | 8 / 4 (A) = 8 / 4 = VT        |
|  | 1-8 / 1 (+ 24 V) = $U_N$ = BN |
|  | 1-8 / 3 (0 V) = 0 V = BU      |

### Signaling

|                        |    |
|------------------------|----|
| Status display present | No |
|------------------------|----|


### Dimensions

# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood



1197628

<https://www.phoenixcontact.com/in/products/1197628>

|                     |  |
|---------------------|--|
| Dimensional drawing |  |
| Width               | 30 mm  |
| Height              | 32 mm  |
| Length              | 105 mm   |


## Material specifications

|  |                    |
|--|--------------------|
| Material Housing   | PBT                |
| Material Cable gland                                     | PA 6 (Cable gland) |
| Seal material  | CR/NBR             |
| Material of contact, master cable side                   | CU alloy           |
| Material of the contact carrier on the master cable side | PA                 |
| Material of contact surface, master cable side           | tin-plated         |

## Cable/line

|              |     |
|--------------|-----|
| Cable length | 5 m |
|--------------|-----|

## PUR/PVC black [PUR]

|                                     |  |
|-------------------------------------|--|
| Dimensional drawing                 |  |
| Cable weight                        | 92 kg/km   |
| UL AWM Style                        | 20549  |
| Number of positions                 | 10   |
| Shielded                            | no   |
| Cable type                          | PUR/PVC black [PUR]  |
| Conductor structure signal line     | 19x 0.15 mm  |
| AWG signal line                     | 22   |
| Conductor structure, voltage supply | 42x 0.15 mm  |
| AWG power supply                    | 18   |
| Conductor cross section             | 8x 0.34 mm <sup>2</sup> (Signal line)<br>2x 0.75 mm <sup>2</sup> (power line)        |
| Wire diameter incl. insulation      | 1.3 mm ±0.1 mm (Signal line)   |

# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood



1197628

<https://www.phoenixcontact.com/in/products/1197628>

|   |   |
|---|---|
|   | 1.8 mm ±0.1 mm (power line)   |
| External cable diameter                       | 7.90 mm ±0.2 mm   |
| Outer sheath, material                        | PUR   |
| External sheath, color                        | black RAL 9005  |
| Conductor material                            | Bare Cu litz wires  |
| Material wire insulation                      | PVC   |
| Single wire, color                            | brown, blue, white, green, yellow, gray, pink, red, black, violet                                 |
| Inner sheath thickness                        | ≥ 0.15 mm   |
| Thickness, outer sheath                       | ≥ 0.38 mm   |
| Overall twist                                 | Wires twisted in layers   |
| Nominal voltage, cable                        | 300 V   |
| Test voltage                                  | 2000 V  |
| Minimum bending radius, fixed installation    | 7.5 x D   |
| Minimum bending radius, flexible installation | 10 x D  |
| Smallest bending radius, fixed installation   | 60 mm   |
| Smallest bending radius, movable installation | 79 mm   |
| Dynamic load capacity (bending)               | Max. bending cycles: 1500000, Bending radius: 79 mm, Traversing path: 2 m, Traversing rate: 2 m/s |
| Flame resistance                              | DIN EN 50265  |
| Resistance to oil                             | according to VDE 0472 Part 803  |
| Other resistance                              | Highly resistant to acids, alkaline solutions and solvents  |
| Special properties                            | Silicone-free   |
| Ambient temperature (operation)               | -40 °C ... 90 °C (cable, fixed installation)  |
|   | -5 °C ... 80 °C (Cable, flexible installation)  |
|   | 80 °C (in acc. with UL)   |

## Environmental and real-life conditions

### Ambient conditions


|                                 |                  |
|---------------------------------|------------------|
| Degree of protection            | IP67             |
| Ambient temperature (operation) | -25 °C ... 80 °C |

# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood

1197628

<https://www.phoenixcontact.com/in/products/1197628>

## Drawings

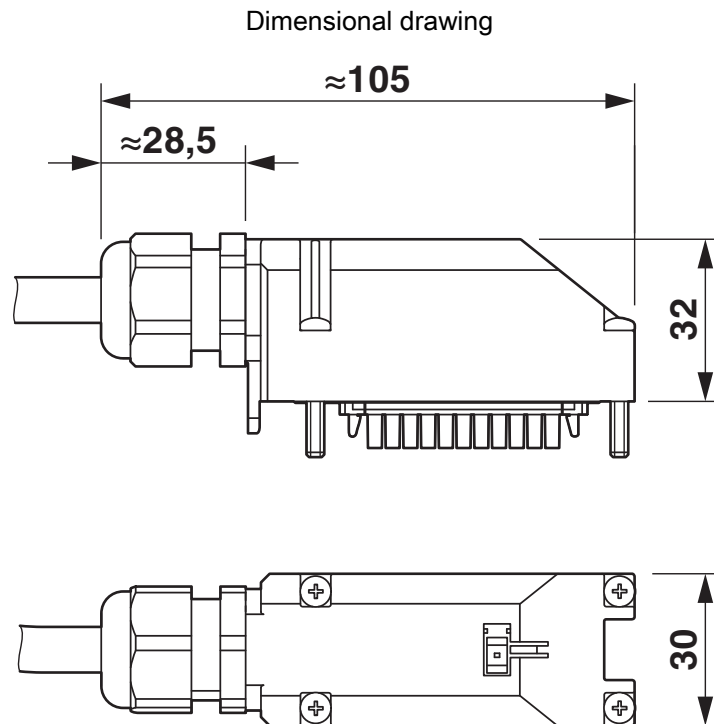

# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood





1197628

<https://www.phoenixcontact.com/in/products/1197628>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1197628>

|  |                       |                       |                   |                             |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>UL Recognized</b><br>Approval ID: FILE E 118976 |                       |                       |                   |                             |
|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|  | 24 V                  | -                     | -                 | -                           |

|   |                       |                       |                   |                             |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>cUL Recognized</b><br>Approval ID: FILE E 118976 |                       |                       |                   |                             |
|   | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|   | 24 V                  | -                     | -                 | -                           |

|                         |  |  |  |  |
|-------------------------|--|--|--|--|
| <b>cULus Recognized</b> |  |  |  |  |
|-------------------------|--|--|--|--|

# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood



1197628

<https://www.phoenixcontact.com/in/products/1197628>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440108 |
| ECLASS-12.0 | 27440108 |
| ECLASS-13.0 | 27440108 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002585 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31251500 |
|-------------|----------|

# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood



1197628

<https://www.phoenixcontact.com/in/products/1197628>

## Environmental product compliance

|   |  |
|---|--|
| EU RoHS                                 |  |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |  |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|   | No hazardous substances above the limits |
| EU REACH SVHC                           |  |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |



# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood



1197628

<https://www.phoenixcontact.com/in/products/1197628>

## Mandatory accessories

### SACB- 8/3-L-C-M8 HD GG - Distributor box header

1197612

<https://www.phoenixcontact.com/in/products/1197612>



Distributor box header, application: Standard, connection method: M8 socket Metal, number of slots: 8, number of positions: 3, coding: A, slot assignment: single, status display: Yes, PNP; master cable connection: Plug-in master cable connection, shielding: no

---

## Accessories

### SZK PZ2 VDE - Screwdriver

1206463

<https://www.phoenixcontact.com/in/products/1206463>



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood



1197628

<https://www.phoenixcontact.com/in/products/1197628>

## SZS 0,4X2,5 VDE - Screwdriver

1205037

<https://www.phoenixcontact.com/in/products/1205037>



Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip

---

## SF-BIT-SL 0,45X2,4-70 - Screw insert

1212607

<https://www.phoenixcontact.com/in/products/1212607>



Screw bit, slotted, E6.3-1/4" drive, size: 0.45 x 2.4 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

# SACB-C-H180- 8/3- 5,0PUR-M8 HD - Connector hood



1197628

<https://www.phoenixcontact.com/in/products/1197628>

## SF-M BH - Screwdriver

1212070

<https://www.phoenixcontact.com/in/products/1212070>



Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

---

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)