Alle Rechte vorbehalten/ *All rights reserved*

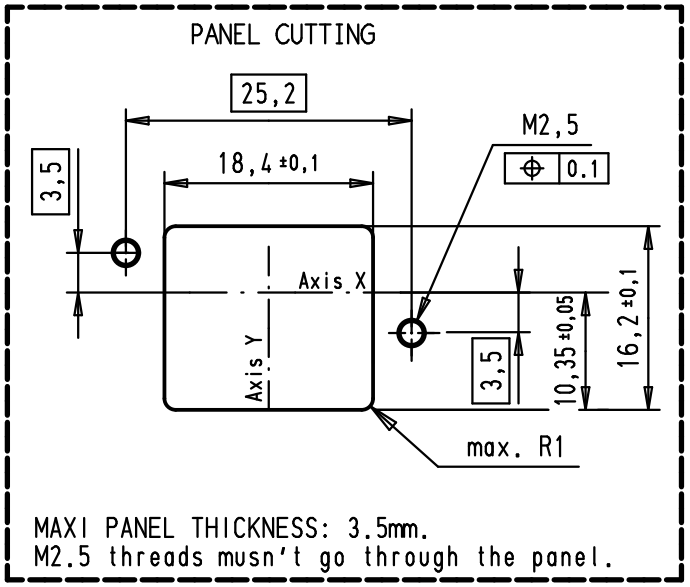

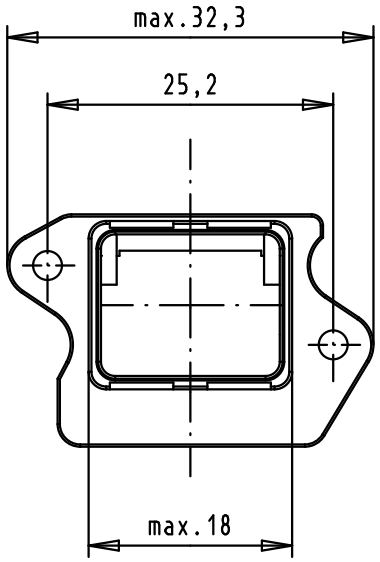

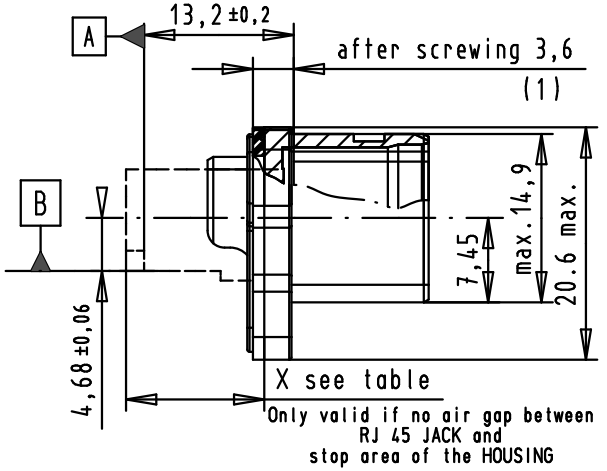



Connector pitch on panel:
Axis X = 27 mm and Axis Y = 21 mm
Receptacle mating side according to
600076-3-106 IEC - variant 04

RJ 45 jack mating references A and B
according to IEC 60603-7

(1) Screwing x2 M2.5 screws between 0.5N.m and 0.8N.m
screw according to DIN 912 and ISO 4762

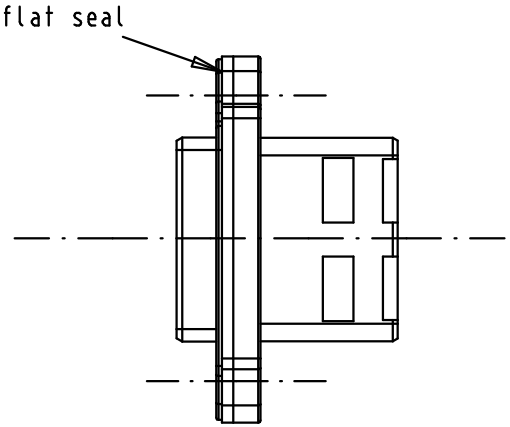

NO AIR GAP BETWEEN RJ45 JACK AND HOUSING		
RJ 45 JACK VARIANT	TB	X
angled jack SMD variant	09 45 551 1100	17.6 +/-0.4
angled jack SOLDER PIN variant	09 45 551 1102	17.6 +/-0.4

				Dat.	Name
			Detail.	12/01/10	AB
			Insp.	14/06/11	JMV
36243	14/06/11	AB	Stand.		
36092	05/09/10	AB			
EC01204	12/01/10	AB			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

Push pull RJ Industrial black Thermoplastic IP67 Receptacle with overmolded flat Seal For angled jacks and power

TB 09 45 545 00 33

Sub.

Maßstab/ *Scale* 1,5:1

Blatt/ *Page* 1/1