

UN Series

Desktop AC/DC Adaptor 18W Series




▲ UNI318



▲ UNT318



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Compact type
- Energy efficiency
- Suit LCD display, digital camera, multimedia player etc.

Protection

- Short circuit protection
- Over Voltage Protection
- Over Current Protection

Safety Approvals

- UL62368
- UL60950
- CAN/CSA C22.2 NO. 62368
- CAN/CSA C22.2 NO. 60950
- PSE
- IEC/EN62368-1
- IEC/EN60950-1
- CNS14336
- GB4943.1

Efficiency

- Meet : COMMISSION REGULATION (EU) 2019/1782 (ERP 6)& DOE 6

Emissions

- FCC Part15 Class B
- CE CISPR 32 Class B
- VCCI Class B
- CNS13438
- GB9254/GB17625.1

Immunity

- EN55024/A1:2001

Input					
Description	Min	Typ	Max	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min	Typ	Max	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea level
Storage Temperature	-20	-	65	°C	Free Convection,Sea level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


Typical model list

Input Condition	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noises	Regulation		Average active efficiency	Efficiency at low load (10%)	No-load power consumption	Option/Remark	
						Line	Load					
Input Voltage: 90V-264Vac Frequency: 47-63Hz	1	5.0V	2.6A	±5%	150mV	150mV	2%	10%	80.47%	-	0.1W	
	2	5.0V	3.0A	±5%	150mV	150mV	2%	10%	81.38%	-	0.1W	
	3	5.5V	3.0A	±5%	150mV	150mV	2%	10%	81.97%	-	0.1W	
	4	5.9V	2.8A	±5%	150mV	150mV	2%	10%	81.97%	-	0.1W	
	5	9.0V	2.0A	±5%	180mV	180mV	2%	10%	85.00%	-	0.1W	
	6	12.0V	1.5A	±5%	120mV	240mV	2%	10%	85.00%	-	0.1W	
	7	15.0V	1.2A	±5%	200mV	240mV	2%	10%	85.00%	-	0.1W	
	8	19.0V	0.9A	±5%	190mV	380mV	2%	10%	84.76%	-	0.1W	
	9	24.0V	0.75A	±5%	240mV	480mV	2%	10%	85.00%	-	0.1W	
	10	48.0V	0.4A	±5%	480mV	960mV	2%	10%	85.29%	-	0.1W	◎

■ Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.
3. "◎" NO PSE Certification.

Mechanical Spec

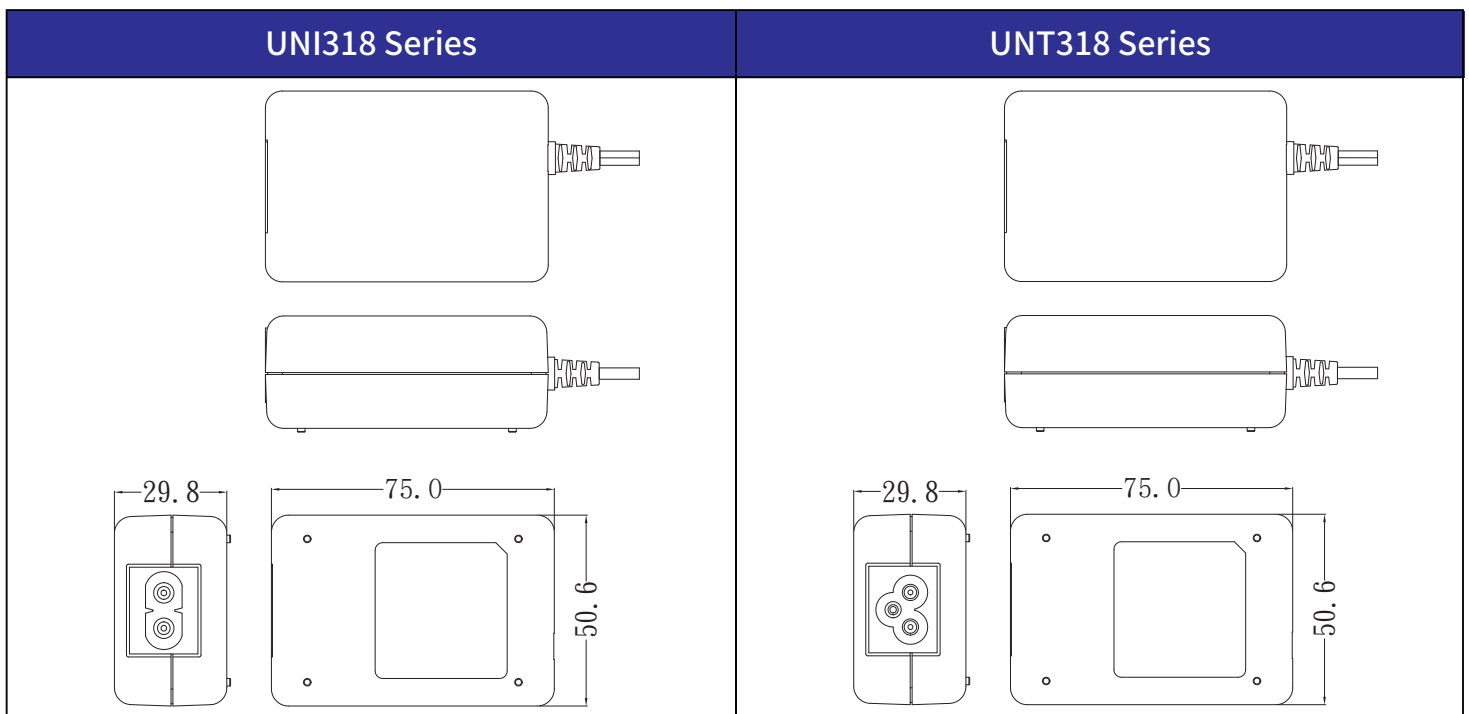

■ Please contact our sales department for details of each model ■