

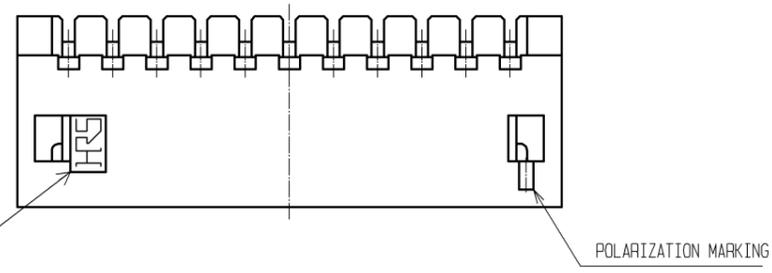
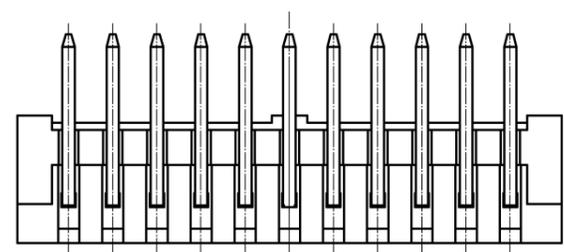
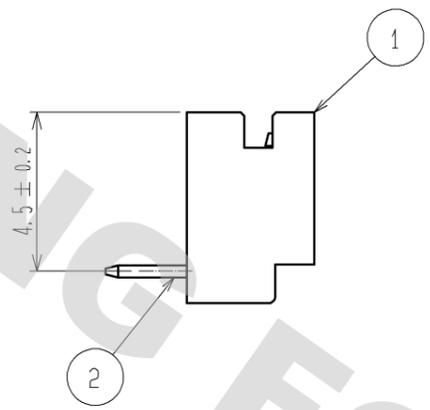
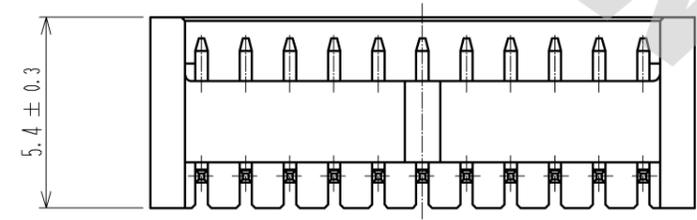



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

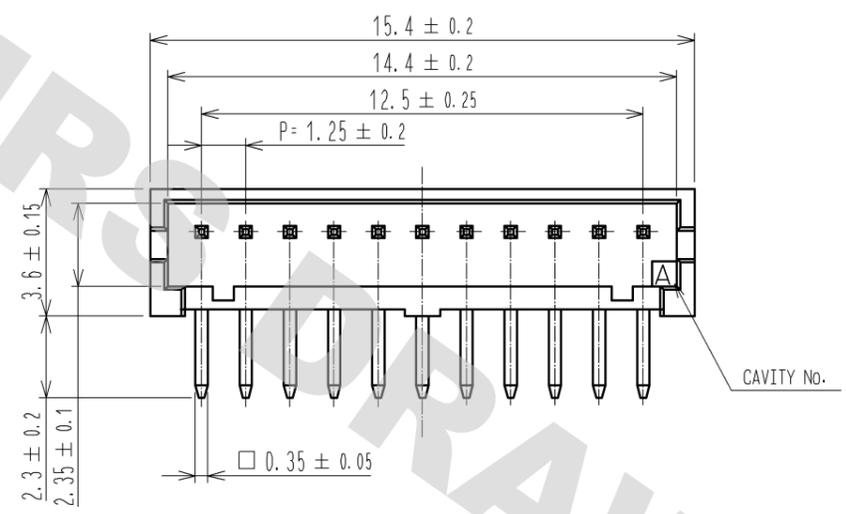

1 APPLICATION FIGURE

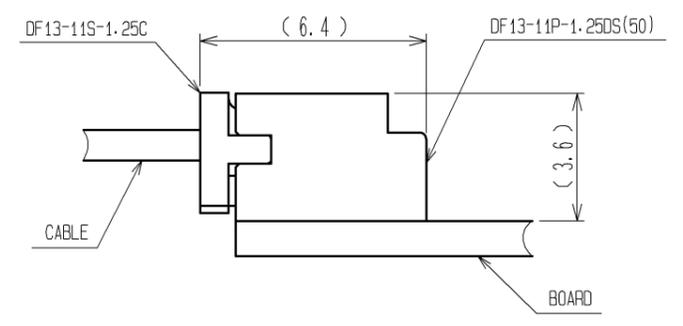


RECOMMENDED PATTERN (BOARD THICKNESS 1mm)

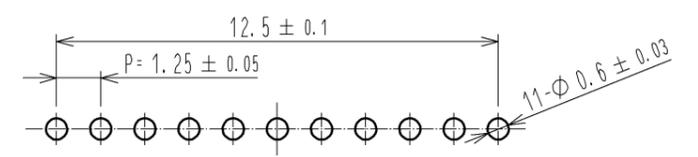

NOTE 1 WHEN THIS CONNECTOR MATES WITH DF13-11S-1.25C, THE MATING LENGTH IS 6.4mm.

2	BRASS	SURFACE:GOLD PLATED 0.2μm min. UNDER:NICKLE PLATED 0.5μm min.	4	ELASTOMER	STOPPER, GRAY			
1	POLYAMIDE	BEIGE(NATURAL), UL94V-0	3	P S	ELECTROSTATIC PROTECTION, CLEAR			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS			
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA 08.09.01	DRAWING NO. EDC3-081824-02					
		CHECED : TS. KUMAZAWA 08.08.29	PART NO. DF13-11P-1.25DS(50)					
		DESIGNED : SN. KOBAYASHI 08.08.28	CODE NO. CL536-0160-8-50					
		DRAWN : SN. KOBAYASHI 08.08.28						

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

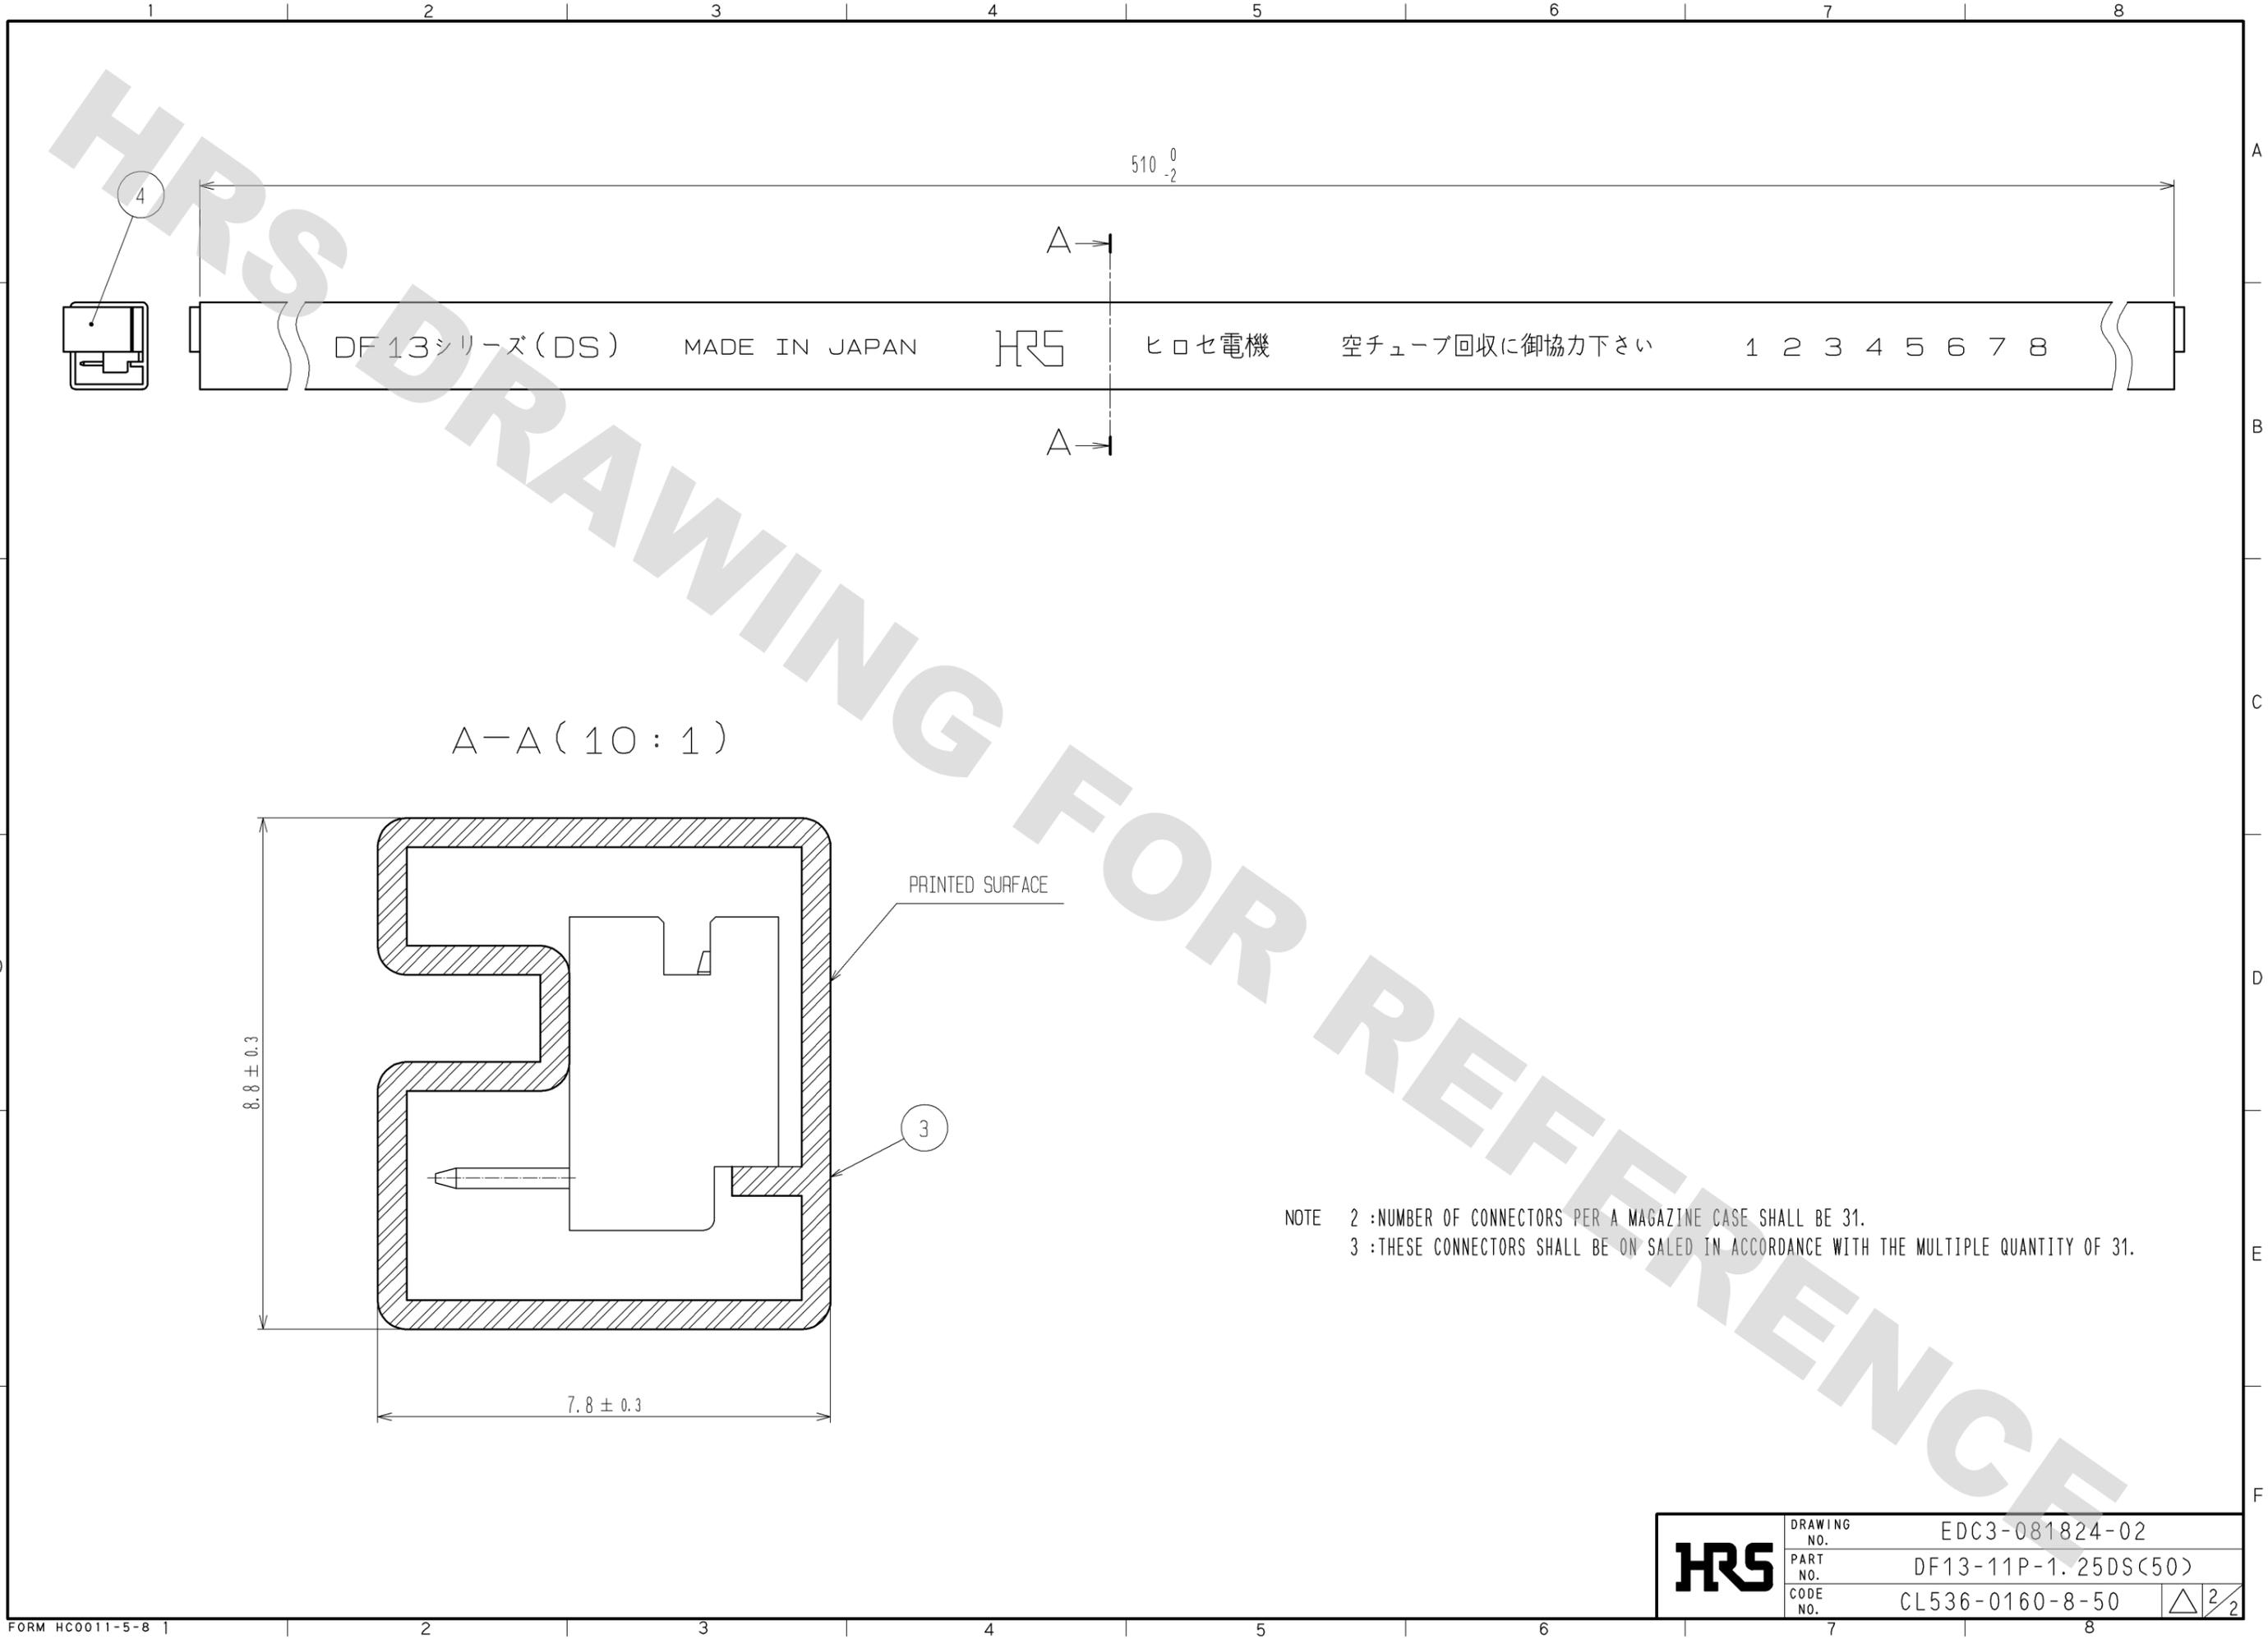

NOTE 2 : NUMBER OF CONNECTORS PER A MAGAZINE CASE SHALL BE 31.
3 : THESE CONNECTORS SHALL BE ON SALED IN ACCORDANCE WITH THE MULTIPLE QUANTITY OF 31.

HRS	DRAWING NO.	EDC3-081824-02
	PART NO.	DF13-11P-1.25DS(50)
	CODE NO.	CL536-0160-8-50
		△ 2/2