

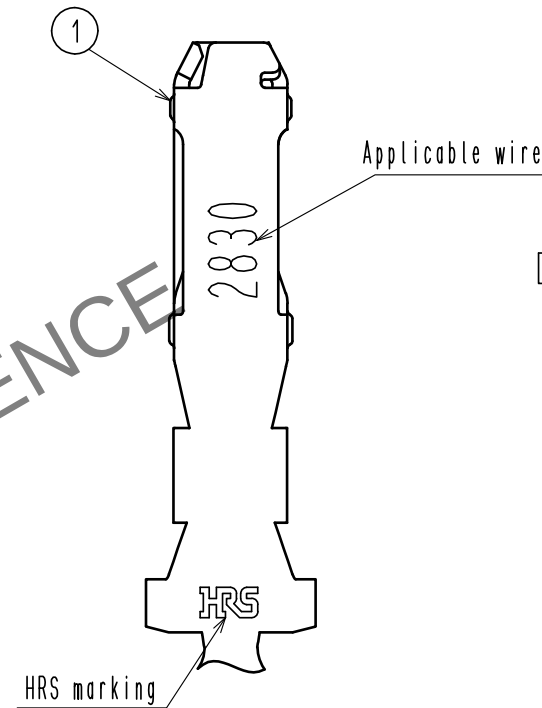


Aug.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

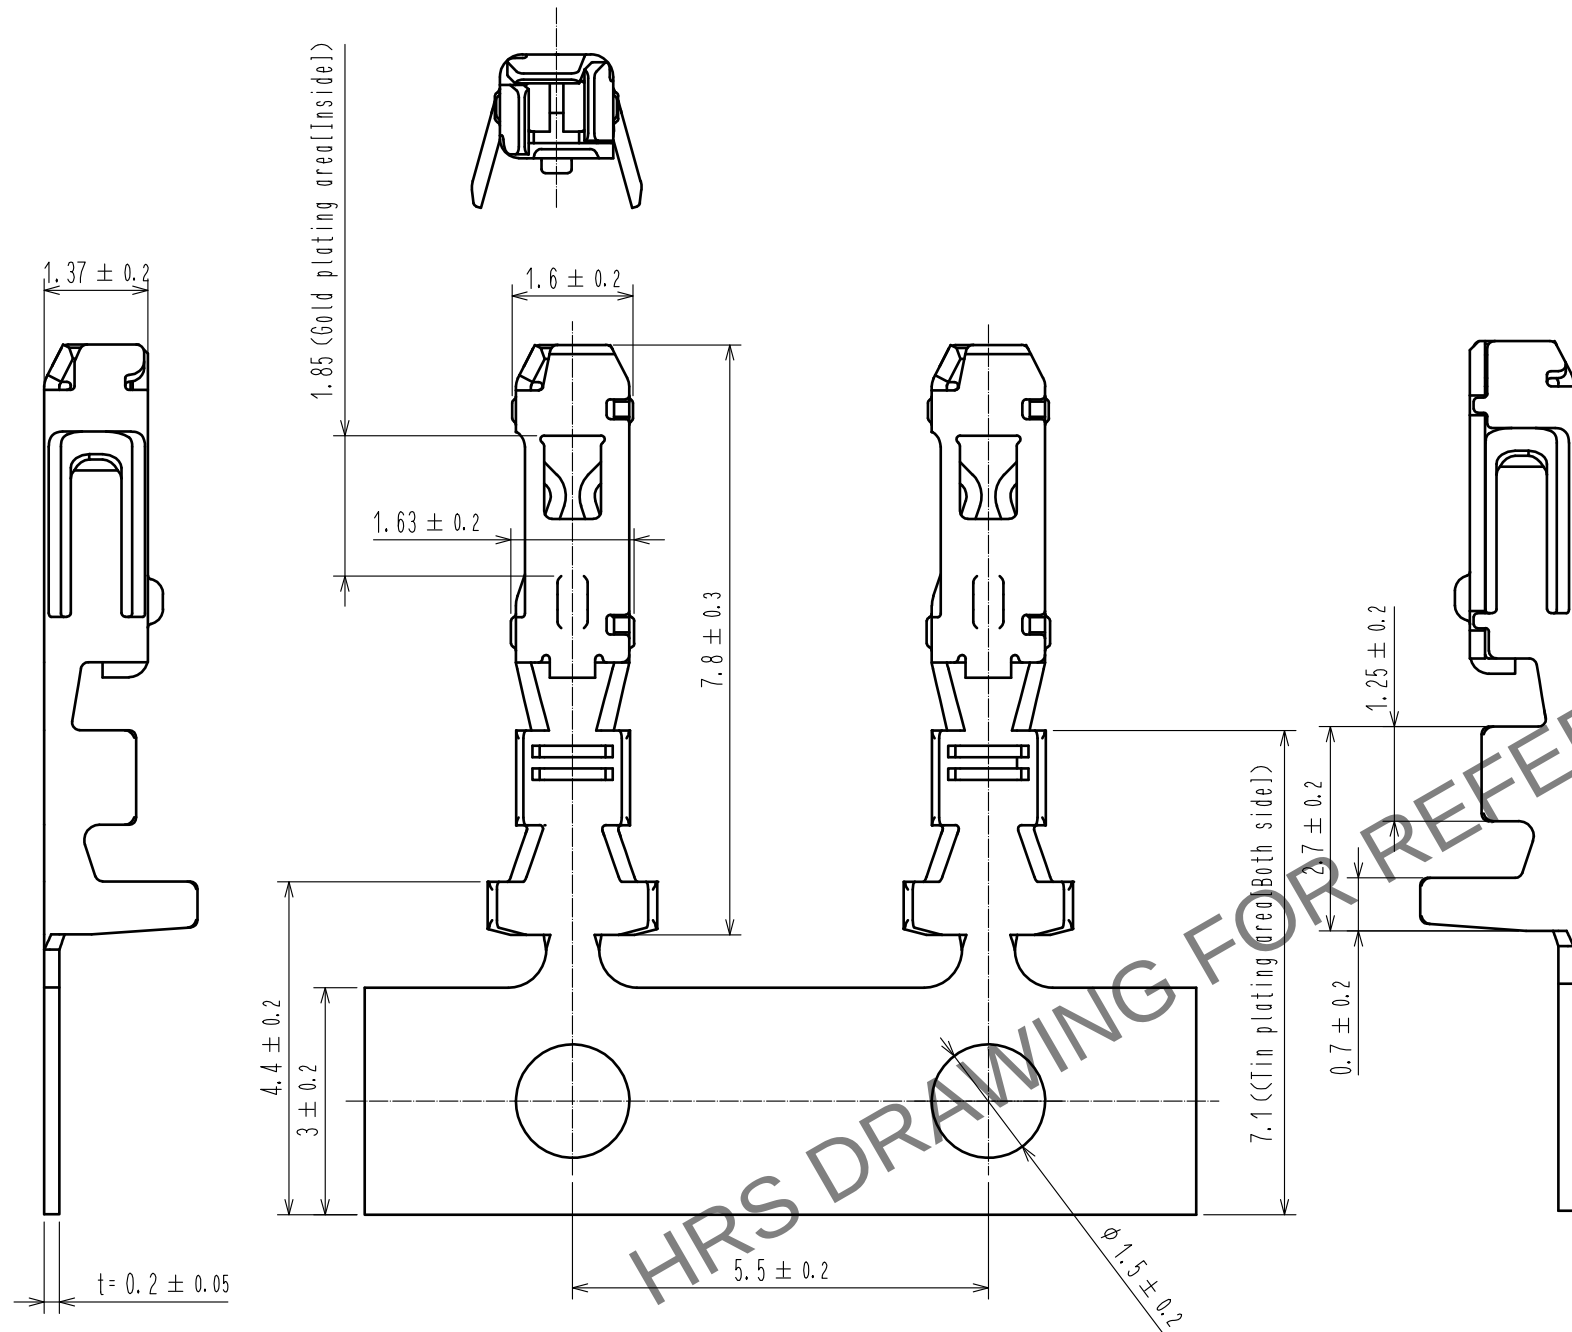

2 Reel style and dimensions

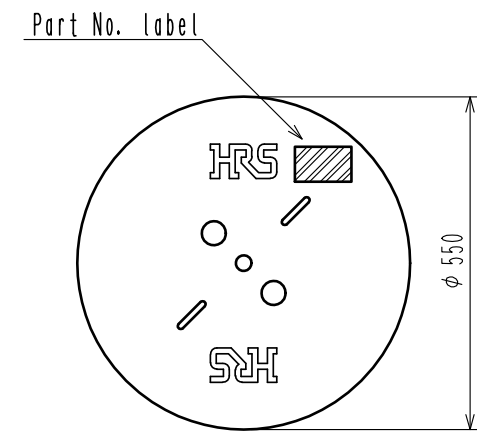

Detail of part No. Label

HRS		検査
品名コード	CL544-1038-0	
品名	DF62W-2830SCFA	
数量	15000	
仕様		
LOT No.		
継ぎ目		

<

- Notes
- 1RL : 15000 contacts.
 - 2 Style of reel and box are shown in figure.
 - Up to 5 reels are packed up in one box.
 - Please be sure to check the form of crimping using a cable when you adjust applicator.
 - Always refer to the manuals below for operation of this product.
For Cable assembly / Cable assembly procedure ETAD-H0760
For Mating/Unmating / Operation manual ETAD-H0761

				1		Phosphor bronze		Contact area : Gold plating 0.2μm min Carrier/Barrel area : Tin plating 1μm min Others : Nichel plating 0.5 μm min				
NO.	MATERIAL		FINISH . REMARKS			NO.	MATERIAL		FINISH . REMARKS			
UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS			DESIGNED		CHECKED	DATE	
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA			17. 03. 13		DRAWING NO.	EDC-370943-00-00				
		CHECKED : TS. FUKUSHIMA			17. 03. 13		PART NO.	DF62W-2830SCFA				
		DESIGNED : YK. YAMAGUCHI			17. 03. 13		CODE NO.	CL544-1038-0-00				1
		DRAWN : YK. YAMAGUCHI			17. 03. 13							