

Special welding mat

Composition:

SBR rubber surface on 100% nitrile closed cell foam

Applications:

welding and grinding stations

Environment: dry

Advantages:

- bevelled edges to avoid the risk of falling
- resists sparks from welding and grinding
- rough anti-slip surface
- surface very resistant to weld spatter
- long life expectancy
- excellent anti-fatigue performance thanks to high-end 100% nitrile foam

Color: black

+ Info:




- flexibility obtained by the material: foam
- cutting on request
- custom dimensions: contact us



Lower surface



Upper surface

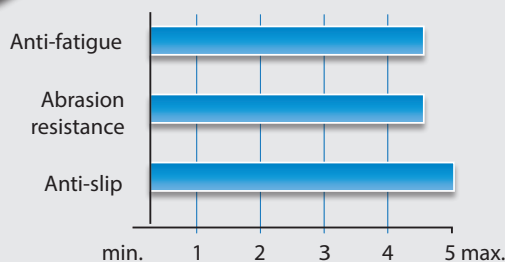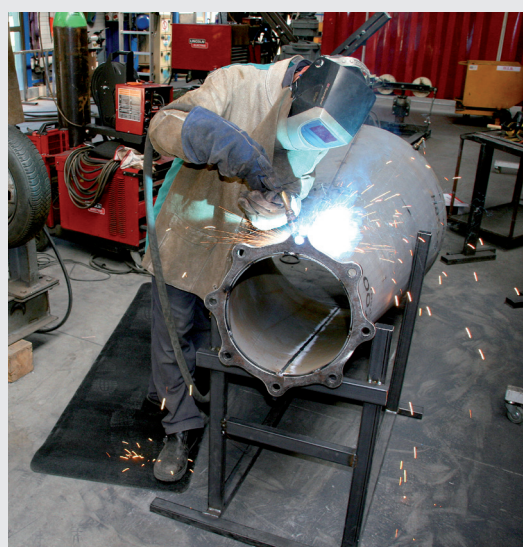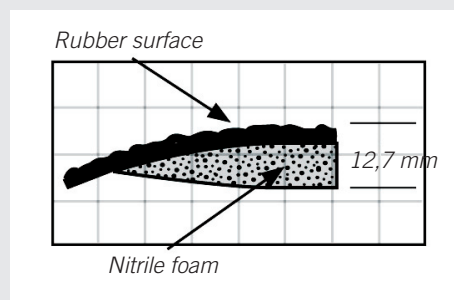

Reference	Dimensions	Thickness	Weight
NT4476191	61 x 91 cm	13,0 mm	5,0 kg/p
NT44791152	91 x 152 cm	13,0 mm	10,5 kg/p
NT44791	0,91 x 22,90 m	13,0 mm	153,6 kg/rl

